


**General Description**

The **MC33063** is a monolithic control circuit containing the primary functions required for DC-to-DC converters. This device consists of an internal temperature compensated reference ( 1.25V ), comparator, controlled duty cycle oscillator with an active current limit circuit, driver and high current output switch. The IC is specifically designed to be used in Step-Down and Step-Up and Voltage-Inverting applications with a minimum number of external components.




The **MC33063** is available in DIP8 and SOP8 package.

**Features**

- Operation from 3.0V to 40V Input
- Low Standby Current
- Current Limiting
- Output Switch Current to 1.5A
- Output Voltage Adjustable
- Frequency Operation to 100kHz
- Precision 2% Reference


**Functional Block Diagram**

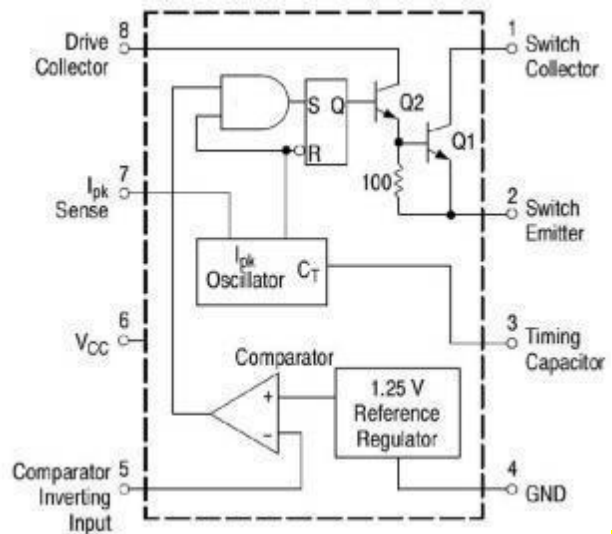

**Ordering Information**

| DEVICE           | Package Type | MARKING  | Packing | Packing QTY |
|------------------|--------------|----------|---------|-------------|
| XBLW MC33063ADTR | SOP-8        | MC33063A | Tape    | 2500/Reel   |
|                  |              |          |         |             |
|                  |              |          |         |             |
|                  |              |          |         |             |
|                  |              |          |         |             |
|                  |              |          |         |             |

**Pin Configuration**

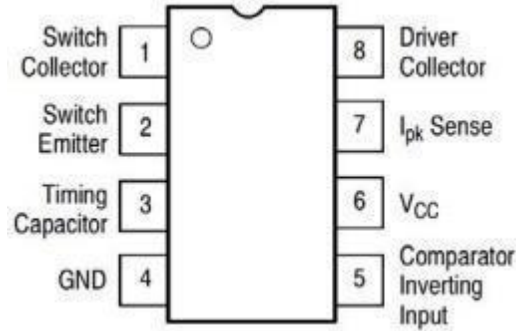

**Pin Description**

| Pin Number | Pin Name | Function Description | Pin Number | Pin Name        | Function Description       |
|------------|----------|----------------------|------------|-----------------|----------------------------|
| 1          | SC       | Switch collector     | 5          | FB              | Comparator inverting input |
| 2          | SE       | Switch emitter       | 6          | V <sub>CC</sub> | Input voltage              |
| 3          | CT       | Timing capacitor     | 7          | I <sub>pk</sub> | I <sub>pk</sub> sense      |
| 4          | GND      | Ground               | 8          | DC              | Drive collector            |

**Absolute Maximum Ratings ( Ta= 25 ° C)**


| Parameter Name                                  | Symbol                   | Value   | Unit |
|---|--------------------------|---------|------|
| Power Supply Voltage                            | V <sub>CC</sub>          | 40      | V    |
| Comparator Input Voltage Range                  | V <sub>IR</sub>          | -0.3~40 | V    |
| Switch Collector Voltage                        | V <sub>C</sub> (switch)  | 40      | V    |
| Switch Emitter Voltage (V <sub>Pin1</sub> =40V) | V <sub>E</sub> (switch)  | 40      | V    |
| Switch Collector to Emitter Voltage             | V <sub>CE</sub> (switch) | 40      | V    |
| Driver Collector Voltage                        | V <sub>C</sub> (drive)   | 40      | V    |
| Driver Collector Current                        | I <sub>C</sub> (drive)   | 100     | mA   |
| Switch Current                                  | I <sub>SW</sub>          | 1.5     | A    |
| Power Dissipation                               | DIP8                     | 1.25    | W    |
|   | SOP8                     | 625     | mW   |
| Operating Ambient Temperature Range             | T <sub>a</sub>           | 0~70    | °C   |
| Storage Temperature Range                       | T <sub>stg</sub>         | -65~150 | °C   |

**Electrical Characteristics ( Unless otherwise noted , V<sub>CC</sub>=5 .0 V, Ta=0~70 ° C)**


| Parameter Name  | Symbol                                | Min | Typ | Max | Unit |
|---|---------------------------------------|-----|-----|-----|------|
| <b>OSCILLATOR</b>   |                                       |     |     |     |      |
| Frequency (V <sub>pin5</sub> =0V,CT=1.0nF, Ta=25°C)                           | f <sub>osc</sub>                      | 24  | 33  | 42  | kHz  |
| Charge Current (V <sub>CC</sub> =5.0~40V, Ta=25°C)                            | I <sub>chg</sub>                      | 24  | 35  | 42  | PA   |
| Discharge Current (V <sub>CC</sub> =5.0~40V, Ta=25°C)                         | I <sub>dischg</sub>                   | 140 | 220 | 260 | PA   |
| Discharge to Charge Current Ratio (Pin7 to V <sub>CC</sub> , Ta=25°C)         | I <sub>dischg</sub> /I <sub>chg</sub> | 5.2 | 6.5 | 7.5 |      |
| Current limit Sense Voltage (I <sub>chg</sub> =I <sub>dischg</sub> , Ta=25°C) | V <sub>ipk</sub> (sense)              | 250 | 300 | 350 | mA   |

| OUTPUT SWITCH  |               |    |       |      |       |
|--|---------------|----|-------|------|-------|
| Saturation Voltage, Darlington Connection<br>(ISW=1.0A, Pins 1,8 Connected)                            | $V_{CE(sat)}$ |    | 1.0   | 1.3  | V     |
| Saturation Voltage, Darlington Connection<br>(ISW=1.0A, Rpin 8=82Ω to Vcc, Forced $\beta \approx 20$ ) | $V_{CE(sat)}$ |    | 0.45  | 0.7  | V     |
| DC Current Gain (ISW=1.0A, VCE=5.0V, Ta=25°C)  | hFE           | 50 | 75    |      |       |
| Collector Off-State Current (VCE=40V)  | Ic(off)       |    | 0.01  | 100  | PA    |
| COMPARATOR   |               |    |       |      |       |
| Threshold Voltage (Ta=25°C)  | $V_{th}$      |    | 1.225 | 1.25 | 1.275 |
| Threshold Voltage (Ta=0~70°C)  |               |    | 1.21  |      | 1.29  |
| Threshold Voltage Line Regulation<br>(Vcc=3.0~40V)   | Regline       |    | 1.4   | 5.0  | mV    |
| Input Bias Current(Vin=0V)   | $I_{IB}$      |    | -20   | -400 | nA    |
| TOTAL DEVICE   |               |    |       |      |       |
| Supply Current (Vcc=5.0~40V, CT=1.0nF,<br>Pin7=Vcc, Vpin5>Vth, pin2=Gnd, Remaining Pins Open)          | Icc           |    |       | 4.0  | mA    |


## Characteristics Curves

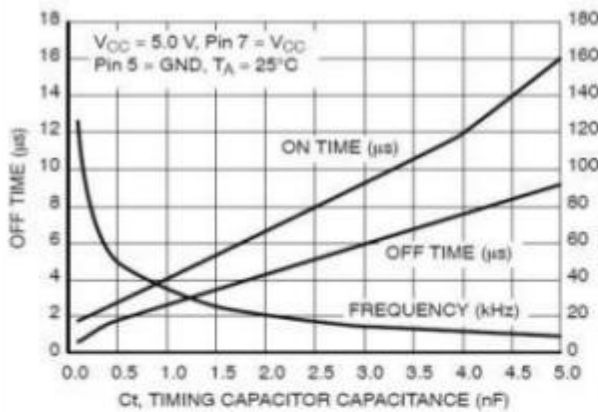

Oscillator Frequency

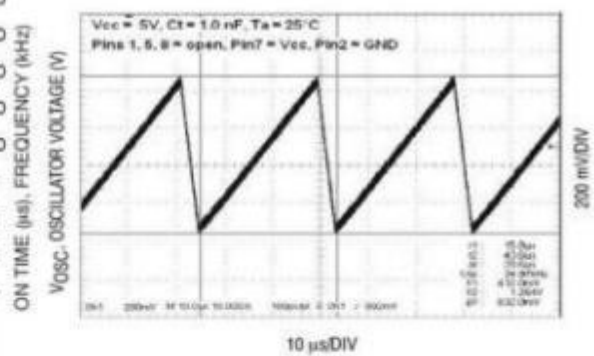


Timing Capacitor Waveform

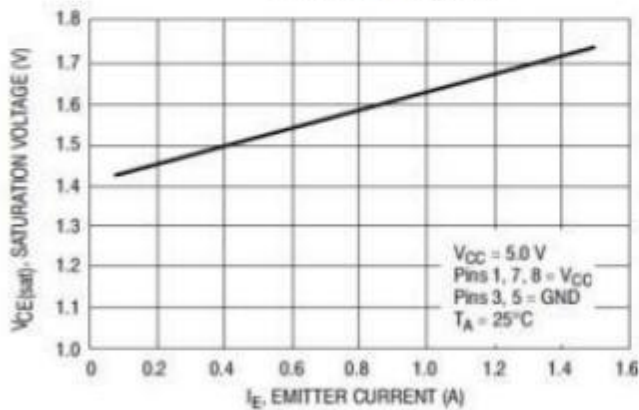


Emitter Follower Configuration Output

Saturation Voltage Versus Emitter Current

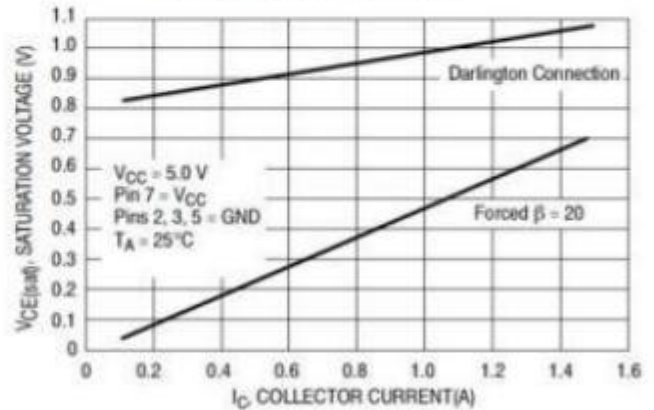


Common Emitter Configuration Output

Switch Saturation Voltage Versus Collector Current

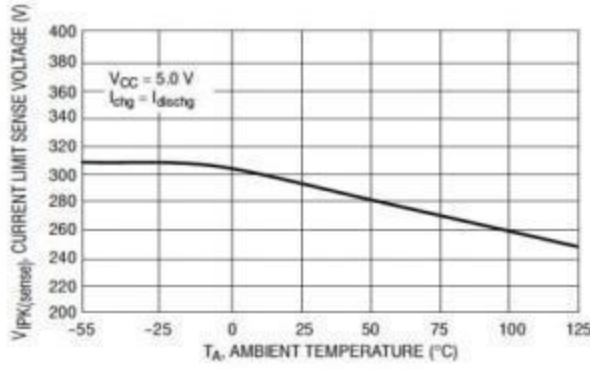


Current Limit Sense Voltage Versus Temperature

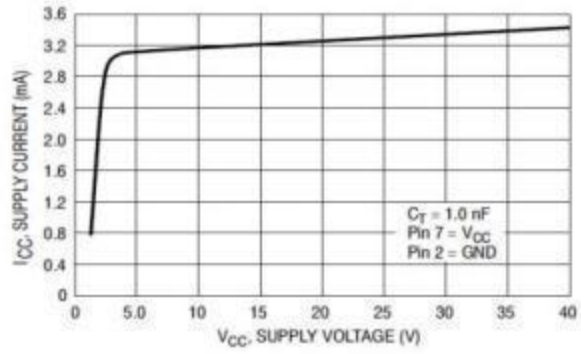

Standby Supply Current Versus Supply Voltage


**Typical Application**

**1. Step-Up Converter**

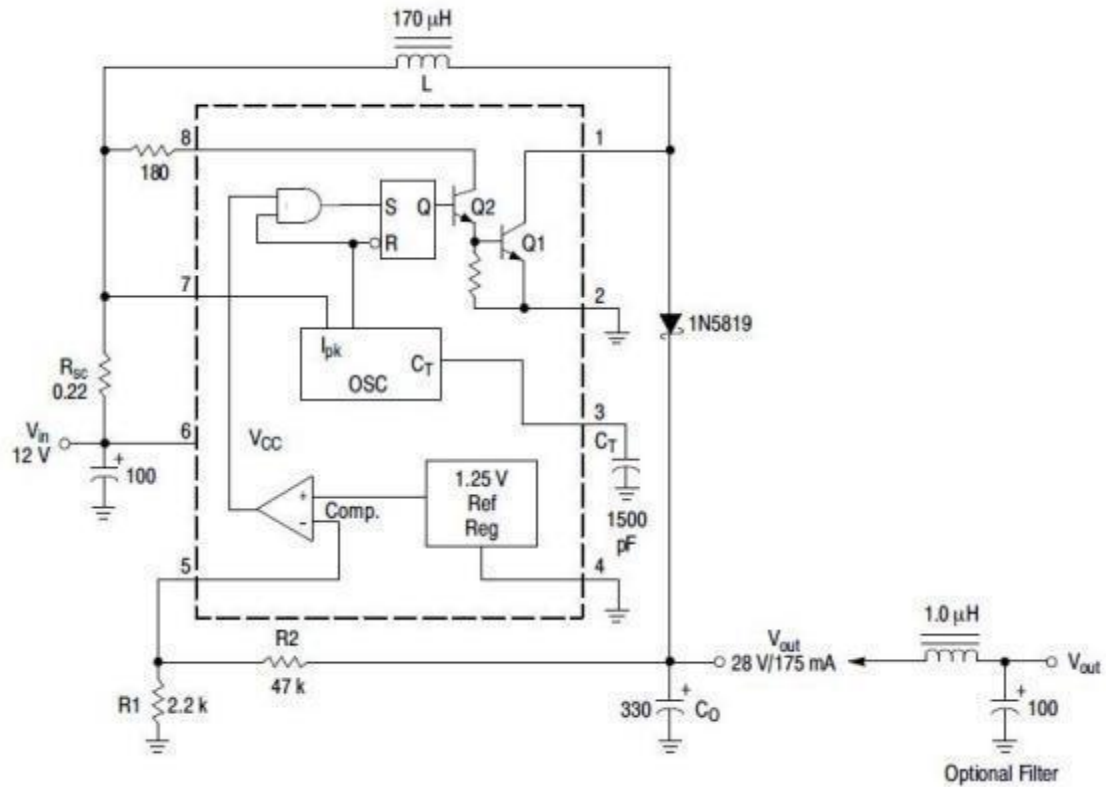


| Test                               | Conditions   | Results             |
|------------------------------------|--|---------------------|
| Line Regulation                    | V <sub>in</sub> =8.0V~ 16V, I <sub>o</sub> = 175mA | 30mV=±0.05%         |
| Load Regulation                    | V <sub>in</sub> = 12V, I <sub>o</sub> =75mA~ 175mA | 10mV=±0.017%        |
| Output Ripple                      | V <sub>in</sub> = 12V, I <sub>o</sub> = 175mA      | 400mV <sub>pp</sub> |
| Efficiency                         | V <sub>in</sub> =12V, I <sub>o</sub> = 175mA       | 87.7%               |
| Output Ripple With Optional Filter | V <sub>in</sub> =12V, I <sub>o</sub> = 175mA       | 40mV <sub>pp</sub>  |

## 2. Step-Down Converter

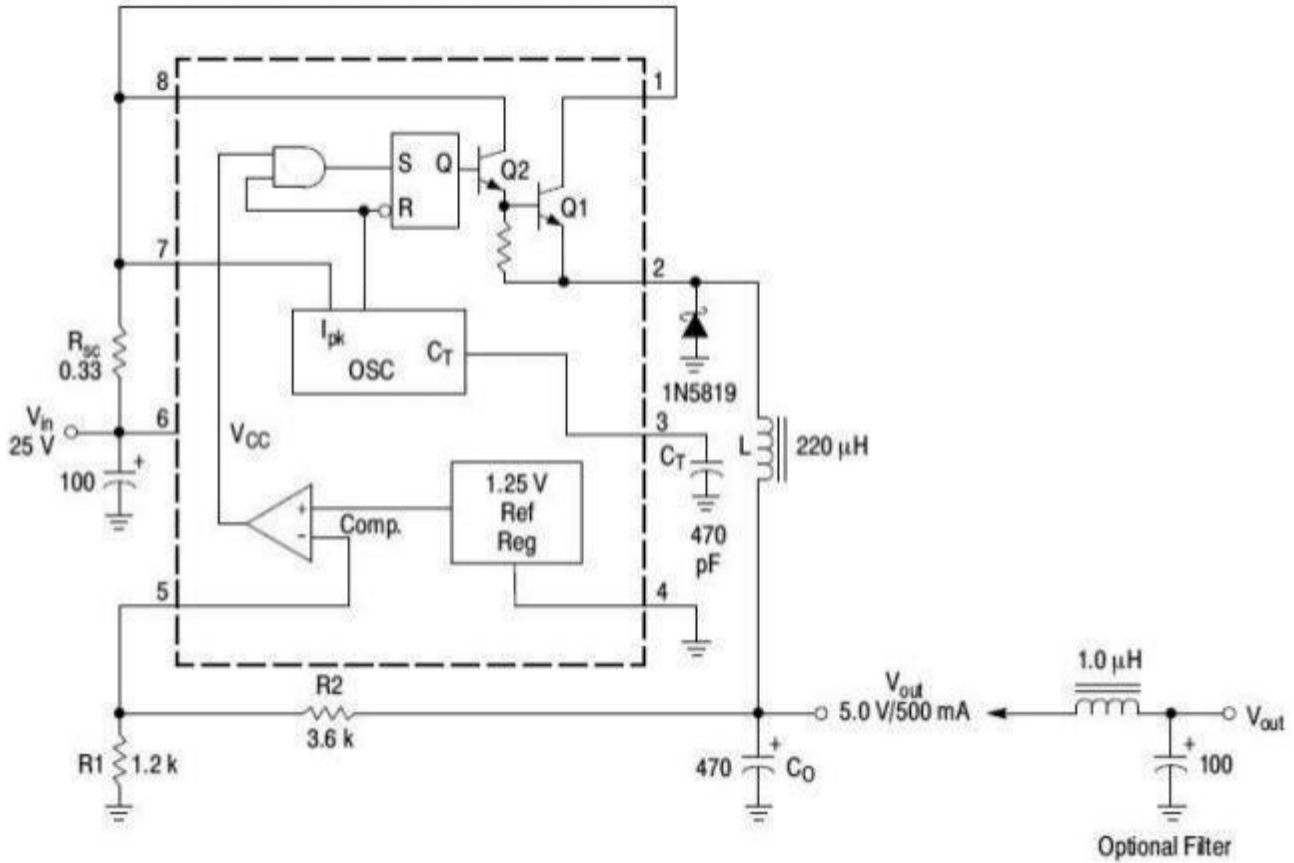

| Test                               | Conditions                       | Results           |
|------------------------------------|----------------------------------|-------------------|
| Line Regulation                    | $V_{in}=15V\sim 25V, I_o=500mA$  | $12mV\pm 0.12\%$  |
| Load Regulation                    | $V_{in}=25V, I_o=50mA\sim 500mA$ | $3.0mV\pm 0.03\%$ |
| Output Ripple                      | $V_{in}=25V, I_o=500mA$          | 120mVpp           |
| Short Circuit Current              | $V_{in}=25V, R_L=0.1\Omega$      | 1.1A              |
| Efficiency                         | $V_{in}=25V, I_o=500mA$          | 83.7%             |
| Output Ripple With Optional Filter | $V_{in}=25V, I_o=500mA$          | 40mVpp            |

## 3. Voltage Inverting Converter

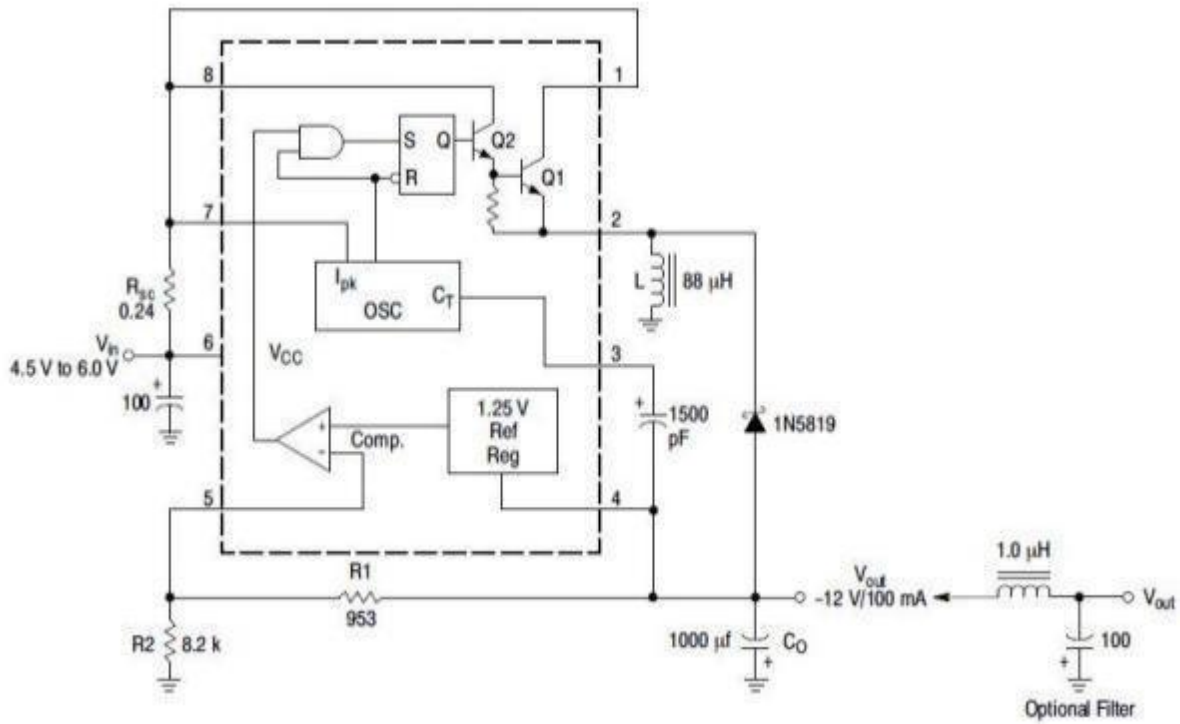

| Test                               | Conditions                        | Results             |
|------------------------------------|-----------------------------------|---------------------|
| Line Regulation                    | $V_{in}=4.5V\sim 6.0V, I_o=100mA$ | $3.0mV=\pm 0.012\%$ |
| Load Regulation                    | $V_{in}=5.0V, I_o=10mA\sim 100mA$ | $0.022V=\pm 0.09\%$ |
| Output Ripple                      | $V_{in}=5.0V, I_o=100mA$          | $500mV_{pp}$        |
| Short Circuit Current              | $V_{in}=5.0V, R_L=0.1\Omega$      | $910mA$             |
| Efficiency                         | $V_{in}=5.0V, I_o=100mA$          | $62.2\%$            |
| Output Ripple With Optional Filter | $V_{in}=5.0V, I_o=100mA$          | $70mV_{pp}$         |

## Application Information

| Calculation          | Step-Up  | Step-Down  | Voltage-Inverting  |
|----------------------|--|--|--|
| $t_{on}/t_{off}$     | $\frac{V_{out} + V_F - V_{in(min)}}{V_{in(min)} - V_{sat}}$                  | $\frac{V_{out} + V_F}{V_{in(min)} - V_{sat} - V_{out}}$                                | $\frac{ V_{out}  + V_F}{V_{in} - V_{sat}}$                                   |
| $(t_{on} + t_{off})$ | $\frac{1}{f}$  | $\frac{1}{f}$  | $\frac{1}{f}$  |
| $t_{off}$            | $\frac{t_{on} + t_{off}}{\frac{t_{on}}{t_{off}} + 1}$                        | $\frac{t_{on} + t_{off}}{\frac{t_{on}}{t_{off}} + 1}$                                  | $\frac{t_{on} + t_{off}}{\frac{t_{on}}{t_{off}} + 1}$                        |
| $t_{on}$             | $(t_{on} + t_{off}) - t_{off}$   | $(t_{on} + t_{off}) - t_{off}$   | $(t_{on} + t_{off}) - t_{off}$   |
| $C_T$                | $4.0 \times 10^{-5} t_{on}$  | $4.0 \times 10^{-5} t_{on}$  | $4.0 \times 10^{-5} t_{on}$  |
| $I_{pk( switch)}$    | $2I_{out(max)} \left( \frac{t_{on}}{t_{off}} + 1 \right)$                    | $2I_{out(max)}$  | $2I_{out(max)} \left( \frac{t_{on}}{t_{off}} + 1 \right)$                    |
| $R_{sc}$             | $0.3/I_{pk( switch)}$  | $0.3/I_{pk( switch)}$  | $0.3/I_{pk( switch)}$  |
| $L_{(min)}$          | $\left( \frac{(V_{in(min)} - V_{sat})}{I_{pk( switch)}} \right) t_{on(max)}$ | $\left( \frac{(V_{in(min)} - V_{sat} - V_{out})}{I_{pk( switch)}} \right) t_{on(max)}$ | $\left( \frac{(V_{in(min)} - V_{sat})}{I_{pk( switch)}} \right) t_{on(max)}$ |
| $C_O$                | $9 \frac{I_{out} t_{on}}{V_{ripple(pp)}}$                                    | $\frac{I_{pk( switch)} (t_{on} + t_{off})}{8V_{ripple(pp)}}$                           | $9 \frac{I_{out} t_{on}}{V_{ripple(pp)}}$                                    |

$V_{sat}$  = Saturation voltage of the output switch

$V_F$  = Forward voltage drop of the output rectifier

The following power supply characteristics must be chosen:

$V_{in}$  — Nominal input voltage

$V_{out}$  — Desired output voltage ,  $|V_{out}| = 1.25 \times (1 + R_2 / R_1)$


$I_{out}$  — Desired output current

$f_{min}$  — Minimum desired output switching frequency at the selected values of  $V_{in}$  and  $I_o$

Vripple(pp) — Desired peak-to-peak output ripple voltage. In practice, the calculated capacitor value will need to be increased due to its equivalent series resistance and board layout. The ripple voltage should be kept to a low value since it will directly affect the line and load regulation.

## Outline Dimensions

| DIP8 | Unit: mm |
|------|----------|
|      |          |
| SOP8 | Unit: mm |

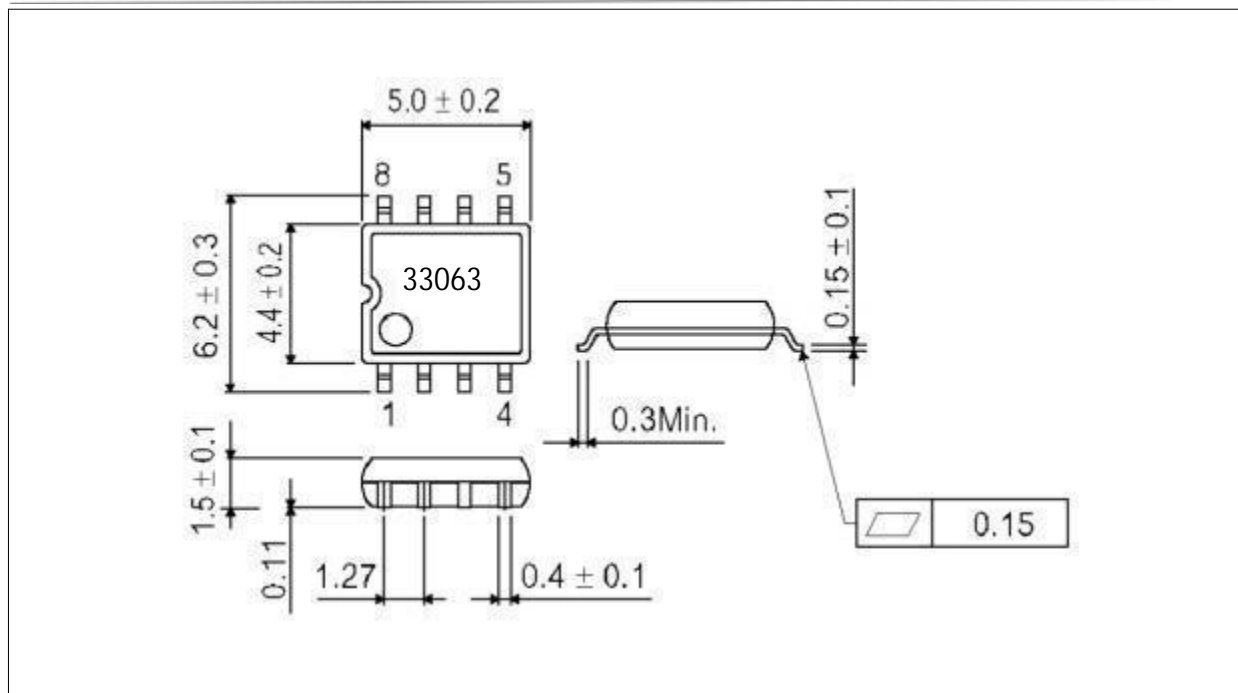



Statement:

- ✧ Shenzhen xinbole electronics co., ltd. reserves the right to change the product specifications, without notice! Before placing an order, the customer needs to confirm whether the information obtained is the latest version, and verify the integrity of the relevant information.
- ✧ Any semiconductor product is liable to fail or malfunction under certain conditions, and the buyer shall be responsible for complying with safety standards in the system design and whole machine manufacturing using Shenzhen xinbole electronics co., ltd products, and take appropriate security measures to avoid the potential risk of failure may result in personal injury or property losses of the situation occurred!
- ✧ Product performance is never ending, Shenzhen xinbole electronics co., ltd will be dedicated to provide customers with better performance, better quality of integrated circuit products.