


MEDIUM CURRENT 1.2V TO 37V ADJUSTABLE VOLTAGE REGULATOR

■ DESCRIPTION


The HG **LM317A** is an adjustable 3-terminal positive voltage regulator, designed to supply 1.5A of output current with voltage adjustable from 1.2V ~ 37V. (TO-220, TO-263 Output current 1.5A TO-223 Output Current 1.0A, TO-252 Output current 0.5A.)

■ FEATURES

- * Output voltage adjustable from 1.2V ~ 37V
- * Output current in excess of 1.5A
- * Internal thermal overload protection
- * Internal short circuit current limiting
- * Output transistor safe area compensation

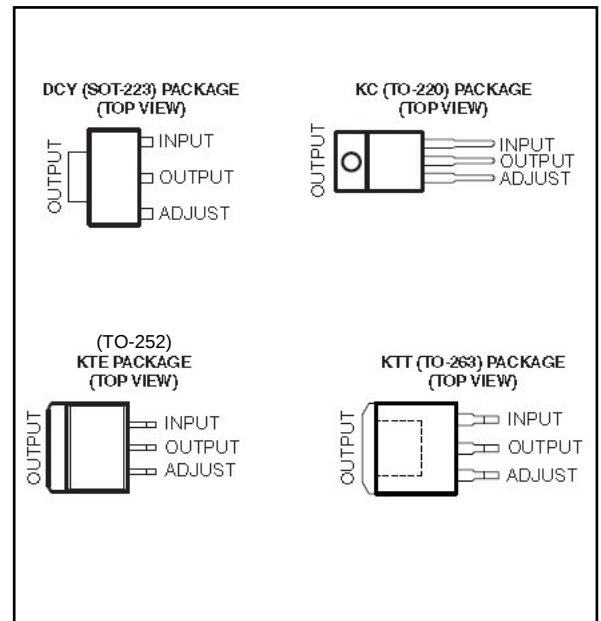

■ BLOCK DIAGRAM

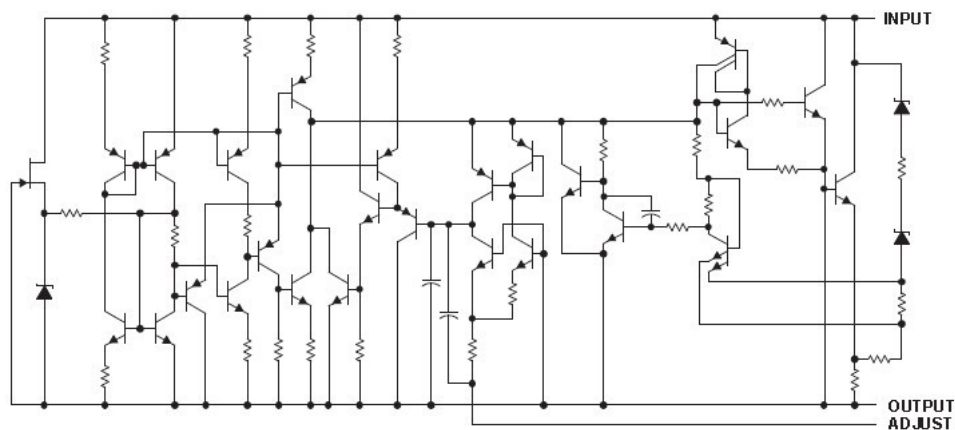

■ ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATINGS	UNIT
Input-Output Voltage Differential	$V_{IN-V_{OUT}}$	40	V
Power Dissipation	P_D	Internally limited	
Junction Temperature	T_J	+125	°C
Operating Temperature	T_{OPR}	-40 ~ +85	°C
Storage Temperature	T_{STG}	-65 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA


PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	SOT-223	θ_{JA}	140	°C/W
	TO-220		50	°C/W
	TO-252		103	°C/W
	TO-263		62.5	°C/W
Junction to Case	SOT-223	θ_{JC}	23.5	°C/W
	TO-220		3	°C/W
	TO-252		12	°C/W
	TO-263		3	°C/W

■ ELECTRICAL CHARACTERISTICS

($V_{IN-V_{OUT}}=5V$, $I_{OUT}=0.5A$, $P_{MAX}=20W$, $T_a=25^{\circ}C$, unless otherwise specified.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Line Regulation	$\Delta V_{OUT}/V_{OUT}$	$3V \leq V_{IN-V_{OUT}} \leq 40V$, $I_{OUT}=100mA$		0.01	0.04	%/V
Load Regulation	ΔV_{OUT}	$10mA \leq I_{OUT} \leq 1.5A$, $V_{OUT} \leq 5V$		5	25	mV
		$V_{OUT} \geq 5V$		0.1	0.5	%
Adjustable Pin Current	I_{ADJ}			50	100	μA
Adjustable Pin Current Change	ΔI_{ADJ}	$3V \leq V_{IN-V_{OUT}} \leq 40V$, $10mA \leq I_{OUT} \leq 500mA$		0.2	5	μA
Reference Voltage	V_{REF}	$3V \leq V_{IN-V_{OUT}} \leq 40V$, $10mA \leq I_{OUT} \leq 1.5A$, $P_D < P_{MAX}$	1.20	1.25	1.30	V
Temperature Stability		$T_{MIN} \leq T_J \leq T_{MAX}$		0.7		%/V _{OUT}
Minimum Load Current for Regulation	$I_{L(MIN)}$	$V_{IN-V_{OUT}}=40V$			4.5	mA
Maximum Output Current	$I_{O(MAX)}$	$V_{IN-V_{OUT}}=40V$, $P_D \leq P_{MAX}$	0.3	0.4		A
		$V_{IN-V_{OUT}}=15V$, $P_D < P_{MAX}$	1.5	2.2		A
RMS Noise vs. %of V_{OUT}	eN	$10Hz \leq f \leq 10KHz$		0.003		%/V _{OUT}
Ripple Rejection	RR	$V_{OUT}=10V$, $f=120Hz$, $C_{ADJ}=0$		65		dB
		$C_{ADJ}=10\mu F$	66	80		dB

■ APPLICATION CIRCUITS

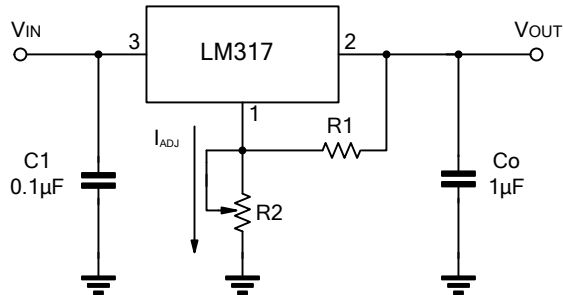

$$V_{OUT} = 1.25V \times (1 + R2/R1) + I_{ADJ} \times R2$$

C1 is required when regulator is located an appreciated distance from power supply. Co is needed to improve transient response.



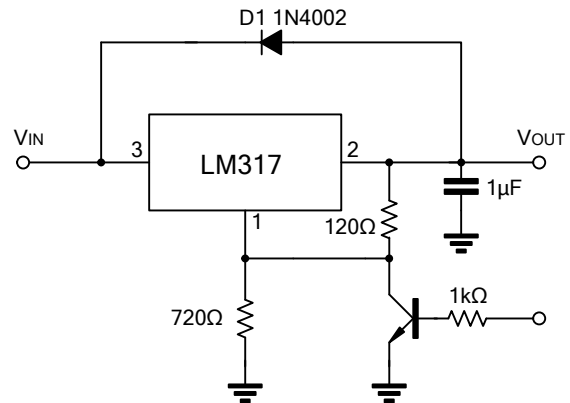


Fig.1 Programmable voltage regulator

Fig.2 Regulator with On-off control

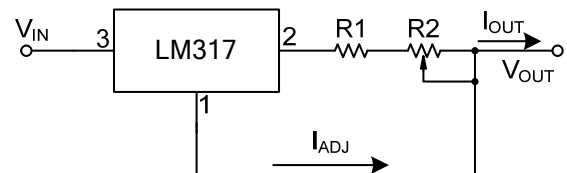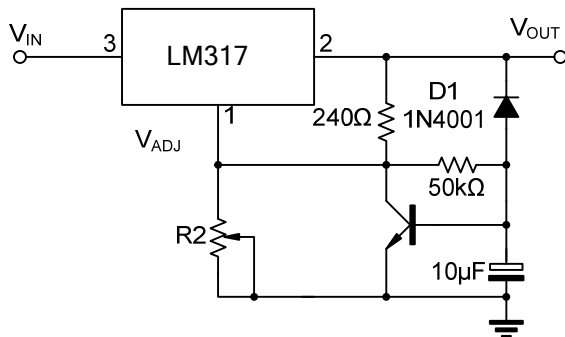

$$I_{O(MAX)} = \left(\frac{V_{REF}}{R1} \right) + I_{ADJ} = \frac{1.25V}{R1}$$

$$I_{O(MIN)} = \left(\frac{V_{REF}}{R1 + R2} \right) + I_{ADJ} = \frac{1.25V}{R1 + R2}$$

$$5mA < I_{OUT} < 100mA$$

Fig.3 Soft Start Application

Fig.4 Constant Current Application

■ TYPICAL CHARACTERISTICS

