


Low VF Schottky barrier rectifier

Features


- Forward current: $I_F \leq 1\text{ A}$
- Reverse voltage $V_R \geq 40\text{ V}$
- Very low forward voltage
- Ultra small and flat lead SMD plastic package



SOD-523
Marking: KX

Application

- Low voltage rectification
- High efficiency DC-to-DC conversion
- Switch mode power supply
- Reverse polarity protection
- Low power consumption applications



Symbol

Electrical Characteristic $T_a=25\text{ }^{\circ}\text{C}$

Parameter		Symbol	Spec. Limit			Unit
			Min.	Typ.	Max.	
Max. Repetitive Peak Reverse Voltage @0.5mA		V_{RRM}	40	50		V
Max. Average Forward Rectified Current		$I_{F(AV)}$			1	A
Forward Voltage Drop @ $I_F=1\text{ A}$	@25 °C	V_F		0.55	0.68	V
Max. Reverse Current at V_{RRM} @40V	@25 °C	I_R		25	100	μA
Operating Temperature Range		T_J	-55		+125	°C
Storage Temperature Range		T_{STG}	-55		+150	°C

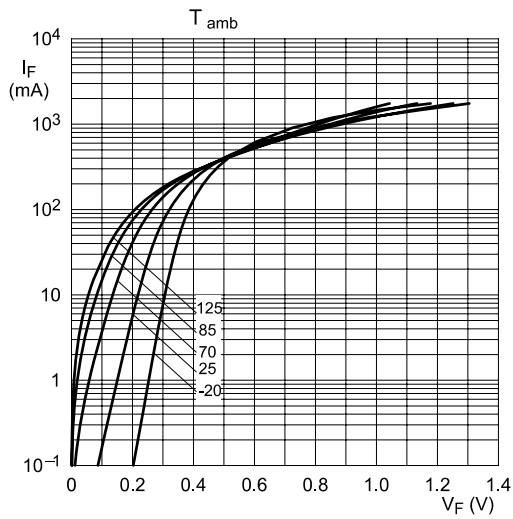


Fig 1. Forward current as a function of forward voltage; typical values


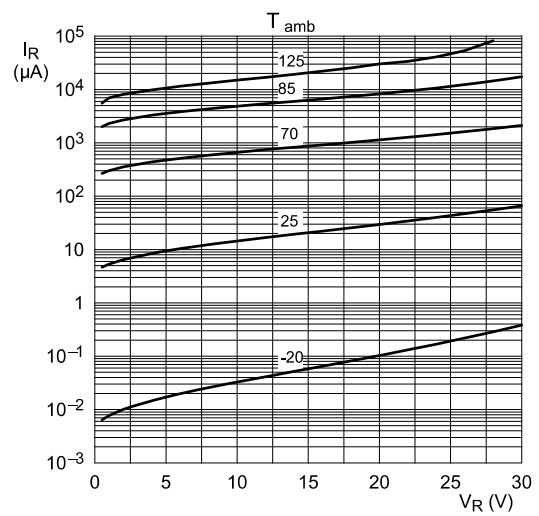



Fig 2. Reverse current as a function of reverse voltage; typical values

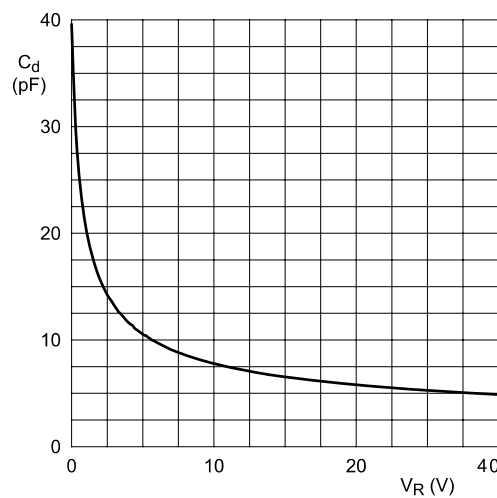

$f = 1 \text{ MHz}; T_{\text{amb}} = 25 \text{ }^{\circ}\text{C}$
Fig 3. Diode capacitance as a function of reverse voltage; typical values

Package Dimensions

SOD-523

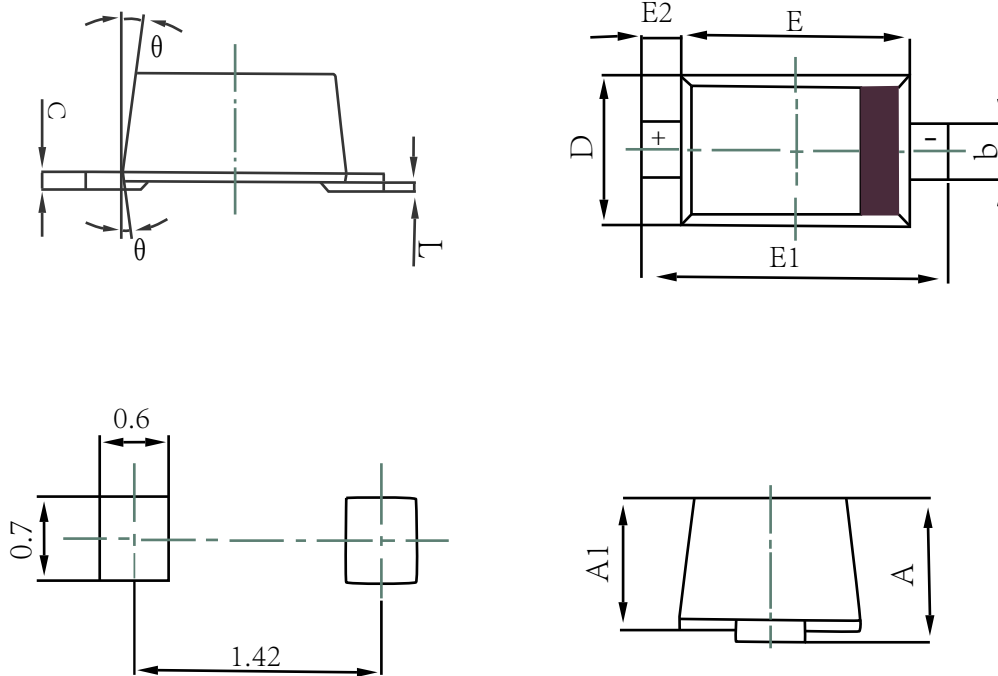

Unit	A	A1	b	c	D	E	E1	E2	L	θ
Max.	0.77	0.70	0.35	0.15	0.85	1.30	1.70	0.20	0.07	7°
Min.	0.51	0.50	0.25	0.08	0.75	1.10	1.50	REF.	0.01	REF.