

HT73XX-2 LOW DROPOUT LINEAR REGULATOR

GENERAL DESCRIPTION

HT73XX-2 series are a set of Low Dropout LinearRegulator ICs implemented inCMOS technology. They can withstand voltage 22V. And they areavailable with lowvoltage drop and low quiescentcurrent, widely used in audio, video and communication appliances.


FEATURES

- Low Power Consumption
- Low Voltage Drop
- Low Temperature Coefficient
- Withstanding Voltage 22V
- Quiescent Current $2.0\mu A$
- Output Voltage Accuracy: tolerance $\pm 1\%$
- High output current: 300mA

TYPICAL APPLICATIONS

- Battery-powered Equipments
- Communication Equipments
- Audio/Video Equipments

PIN CONFIGURATION

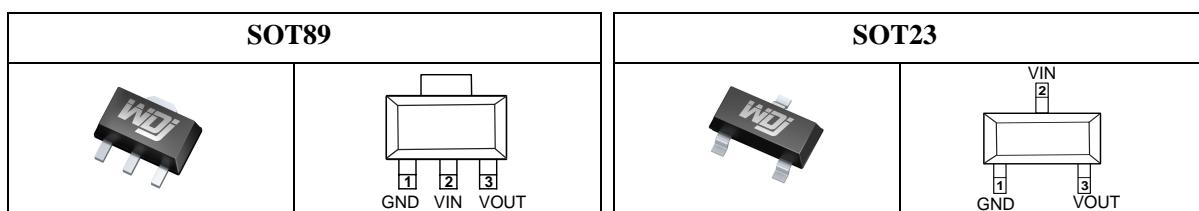

OUTPUT


Series	Output	Package
HT7328-2	2.8V	SOT89
HT7330-2	3.0V	
HT7333-2	3.3V	
HT7336-2	3.6V	SOT23-3
HT7350-2	5.0V	

NOTE: “XX” is output voltage.

PIN DESCRIPTION

No.	Name	Functions Description
1	GND	ground
2	V _{IN}	input
3	V _{OUT}	output

FUNCTIONAL BLOCK DIAGRAM

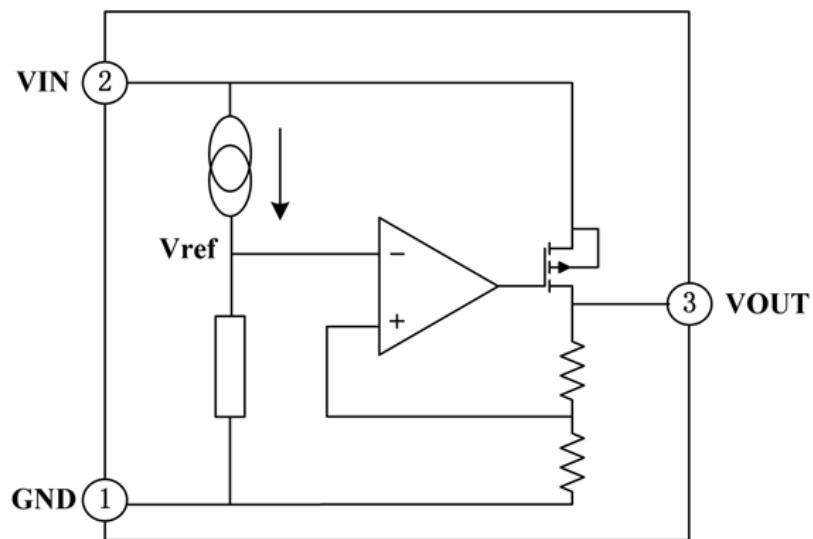

ABSOLUTE MAXIMUM RATINGS

Description	Symbol	Value range	Unit
Limit Power Voltage	V _{IN}	-0.3~+25	V
Storage Temperature Range	T _{STG}	-50~+125	°C
Operating Free-air Temperature Range	T _A	-40~+85	°C

Note : Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

HEAT DISSIPATION

Description	Symbol	Package	Value range	Unit
Thermal resistance	θ_{JA}	SOT89	200	°C/W
		SOT23-3	500	°C/W
Power dissipation	P _W	SOT89	500	mW
		SOT23-3	200	mW

DC CHARACTERISTICS (unless otherwise noted $T_A = +25^\circ\text{C}$)

Series HT7328-2

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Output Voltage	V_{OUT}	$V_{IN}=V_{OUT}+2.0\text{V}$, $I_{OUT}=10\text{mA}$	2.772	2.8	2.828	V
Output Current	I_{OUT}	$V_{IN}=V_{OUT}+2.0\text{V}$	300	—	—	mA
Load Regulation	ΔV_{OUT}	$V_{IN}=V_{OUT}+2.0\text{V}$ $1\text{mA} \leq I_{OUT} \leq 300\text{mA}$	—	37	100	mV
Voltage Drop	V_{DIF}	$I_{OUT}=10\text{mA}$, $\Delta V_{OUT}=2\%$	—	30	55	mV
Quiescent Current	I_{SS}	无负载	—	2.0	2.5	μA
Line Regulation	$\Delta V_{OUT}/V_{OUT} * \Delta V_{IN}$	$V_{OUT}+1.0\text{V} \leq V_{IN} \leq 22\text{V}$, $I_{OUT}=1\text{mA}$	—	—	0.2	$\%/\text{V}$
Input Voltage	V_{IN}	—	—	—	22	V
Temperature Coefficient	$\Delta V_{OUT}/\Delta T_A * V_{OUT}$	$V_{IN}=V_{OUT}+2.0\text{V}$, $I_{OUT}=10\text{mA}$, $-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$	—	± 100	—	$\text{ppm}/^\circ\text{C}$
Overcurrent Protection	I_{ILIM}	$V_{OUT}=0\text{V}$	—	400	—	mA

Note : When $V_{IN}=V_{OUT}+2.0\text{V}$, as the output voltage declined 2%, the $V_{DIF}=V_{IN}-V_{OUT}$.

Series HT7330-2

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Output Voltage	V_{OUT}	$V_{IN}=V_{OUT}+2.0\text{V}$, $I_{OUT}=10\text{mA}$	2.97	3.0	3.03	V
Output Current	I_{OUT}	$V_{IN}=V_{OUT}+2.0\text{V}$	300	—	—	mA
Load Regulation	ΔV_{OUT}	$V_{IN}=V_{OUT}+2.0\text{V}$ $1\text{mA} \leq I_{OUT} \leq 300\text{mA}$	—	37	100	mV
Voltage Drop	V_{DIF}	$I_{OUT}=100\text{mA}$, $\Delta V_{OUT}=2\%$	—	210	300	mV
Quiescent Current	I_{SS}	No Load	—	2.0	2.5	μA
Line Regulation	$\Delta V_{OUT}/V_{OUT} * \Delta V_{IN}$	$V_{OUT}+1.0\text{V} \leq V_{IN} \leq 22\text{V}$, $I_{OUT}=1\text{mA}$	—	—	0.2	$\%/\text{V}$
Input Voltage	V_{IN}	—	—	—	22	V
Temperature Coefficient	$\Delta V_{OUT}/\Delta T_A * V_{OUT}$	$V_{IN}=V_{OUT}+2.0\text{V}$, $I_{OUT}=10\text{mA}$, $-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$	—	± 100	—	$\text{ppm}/^\circ\text{C}$
Overcurrent Protection	I_{ILIM}	$V_{OUT}=0\text{V}$	—	400	—	mA

Note : When $V_{IN}=V_{OUT}+2.0\text{V}$, as the output voltage declined 2%, the $V_{DIF}=V_{IN}-V_{OUT}$.

Series HT7333-2

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Output Voltage	V _{OUT}	V _{IN} =V _{OUT} +2.0V, I _{OUT} =10mA	3.267	3.3	3.333	V
Output Current	I _{OUT}	V _{IN} =V _{OUT} +2.0V	300	—	—	mA
Load Regulation	△ V _{OUT}	V _{IN} =V _{OUT} +2.0V 1mA≤I _{OUT} ≤300mA	—	37	100	mV
Voltage Drop	V _{DIF}	I _{OUT} =100mA, △V _{OUT} =2%	—	195	300	mV
Quiescent Current	I _{SS}	No Load	—	2.0	2.5	μA
Line Regulation	△ V _{OUT} / V _{OUT} * △ V _{IN}	V _{OUT} +1.0V≤V _{IN} ≤22V, I _{OUT} =1mA	—	—	0.2	%/V
Input Voltage	V _{IN}	—	—	—	22	V
Temperature Coefficient	△ V _{OUT} / △ T _A *V _{OUT}	V _{IN} =V _{OUT} +2.0V, I _{OUT} =10mA, -40°C≤T _A ≤85°C	—	±100	—	ppm/ °C
Overcurrent Protection	I _{lim}	V _{OUT} =0V	—	400	—	mA

Note : When V_{IN}=V_{OUT}+2.0V, as the output voltage declined 2%, the V_{DIF}=V_{IN}-V_{OUT}.

Series HT7336-2

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Output Voltage	V _{OUT}	V _{IN} =V _{OUT} +2.0V, I _{OUT} =10mA	3.564	3.6	3.636	V
Output Current	I _{OUT}	V _{IN} =V _{OUT} +2.0V	300	—	—	mA
Load Regulation	△ V _{OUT}	V _{IN} =V _{OUT} +2.0V 1mA≤I _{OUT} ≤300mA	—	37	100	mV
Voltage Drop	V _{DIF}	I _{OUT} =100mA, △V _{OUT} =2%	—	180	300	mV
Quiescent Current	I _{SS}	No Load	—	2.0	2.5	μA
Line Regulation	△ V _{OUT} / V _{OUT} * △ V _{IN}	V _{OUT} +1.0V≤V _{IN} ≤22V, I _{OUT} =1mA	—	—	0.2	%/V
Input Voltage	V _{IN}	—	—	—	22	V
Temperature Coefficient	△ V _{OUT} / △ T _A *V _{OUT}	V _{IN} =V _{OUT} +2.0V, I _{OUT} =10mA, -40°C≤T _A ≤85°C	—	±100	—	ppm/ °C
Overcurrent Protection	I _{lim}	V _{OUT} =0V	—	400	—	mA

Note : When V_{IN}=V_{OUT}+2.0V, as the output voltage declined 2%, the V_{DIF}=V_{IN}-V_{OUT}.

Series HT7350-2

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Output Voltage	V _{OUT}	V _{IN} =V _{OUT} +2.0V, I _{OUT} =10mA	4.9	5.0	5.1	V
Output Current	I _{OUT}	V _{IN} =V _{OUT} +2.0V	300	—	—	mA
Load Regulation	△ V _{OUT}	V _{IN} =V _{OUT} +2.0V 1mA≤I _{OUT} ≤300mA	—	37	100	mV
Voltage Drop	V _{DIF}	I _{OUT} =100mA, △V _{OUT} =2%	—	150	300	mV
Quiescent Current	I _{SS}	No Load	—	2.0	2.5	μA
Line Regulation	△ V _{OUT} / V _{OUT} * △ V _{IN}	V _{OUT} +1.0V≤V _{IN} ≤22V, I _{OUT} =1mA	—	—	0.2	%/V
Input Voltage	V _{IN}	—	—	—	22	V
Temperature Coefficient	△ V _{OUT} / △ T _A * V _{OUT}	V _{IN} =V _{OUT} +2.0V, I _{OUT} =10mA, -40°C≤T _A ≤85°C	—	±100	—	ppm/ °C
Overcurrent Protection	I _{lim}	V _{OUT} =0V	—	400	—	mA

Note : When V_{IN}=V_{OUT}+2.0V, as the output voltage declined 2%, the V_{DIF}=V_{IN}-V_{OUT}.


FUNCTIONAL DESCRIPTION

HT73XX-2 series are linear voltage regulator ICs withstanding 22V voltage. The series IC consists of a voltage reference, an error amplifier, a current limiter and a phase compensation circuit plus a driver transistor. The output stabilization capacitor is also compatible with low ESR ceramic capacitors.

The over current protection circuit and the over voltage protection circuit are built-in. The protection circuit will operate when the output current or input voltage reaches limit level.


TYPICAL APPLICATION CIRCUIT

Basic Circuit

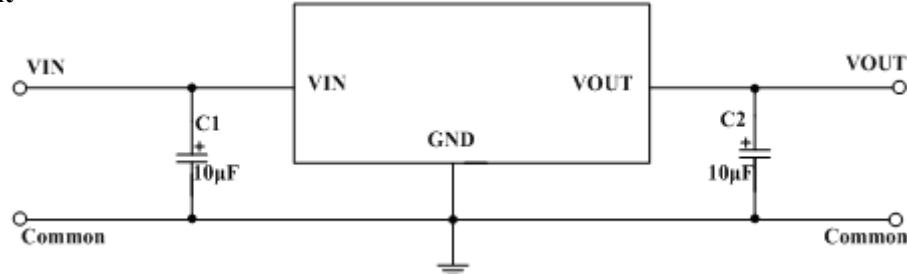


PACKAGE INFORMATION

SOT89

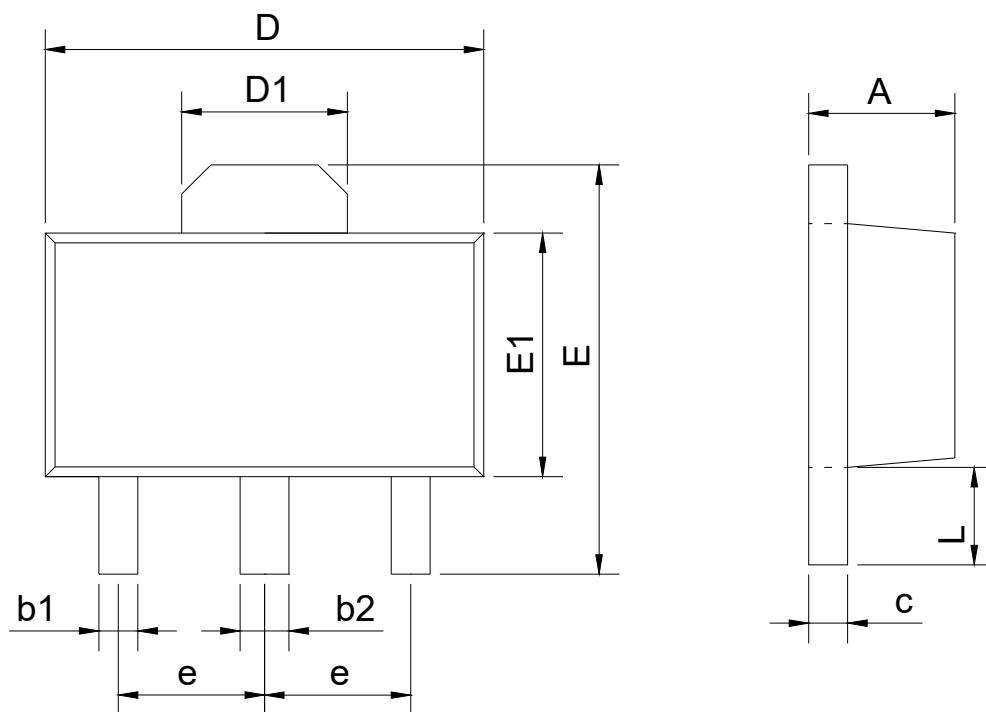

SYMBOL	mm	
	min	max
A	1.40	1.60
b1	0.35	0.50
b2	0.45	0.60
c	0.36	0.46
D	4.30	4.70
D1	1.40	1.80
E	4.00	4.40
E1	2.30	2.70
e	1.50BSC	
L	0.80	1.20

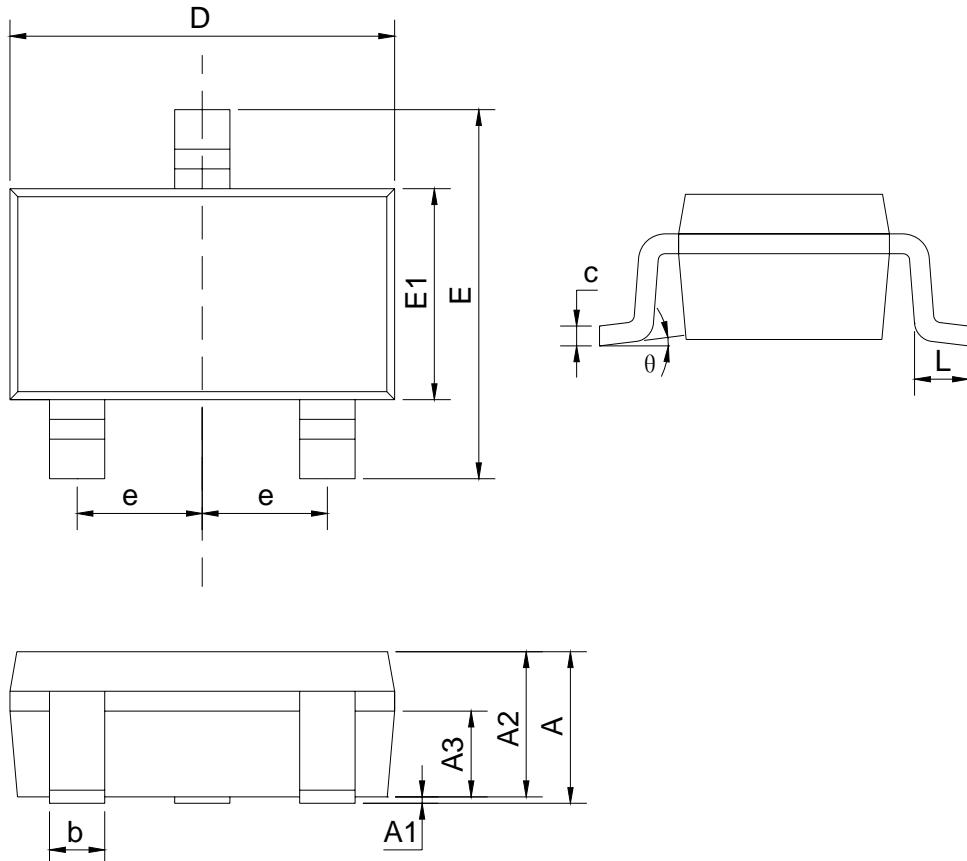SOT23-3


SYMBOL	mm	
	min	max
A		1.35
A1	0.04	0.15
A2	1.00	1.20
A3	0.55	0.75
b	0.38	0.48
c	0.10	0.25
D	2.72	3.12
E	2.60	3.00
E1	1.20	1.80
e	0.95BSC	
L	0.30	0.60
θ	0	8°