



SD103AWS THRU SD103CWS

Reverse Voltage 20-40 Volts Forward Current - 0.35 Ampere

SCHOTTKY DIODES

Features

- ◆ Low forward voltage drop
- ◆ Guard ring construction for transient protection
- Negligible reverse recovery time

SOD-323



Mechanical Data


Case : JEDEC SOD-323 molded plastic body Terminals :

Plated leads solderable per MIL-STD-750, Method 2026

Polarity : Polarity symbols marked on case

Weight : 0.0007 ounce, 0.02 grams

Marking: SD103AWS:S4, SD103BWS:S5, SD103CWS:S6

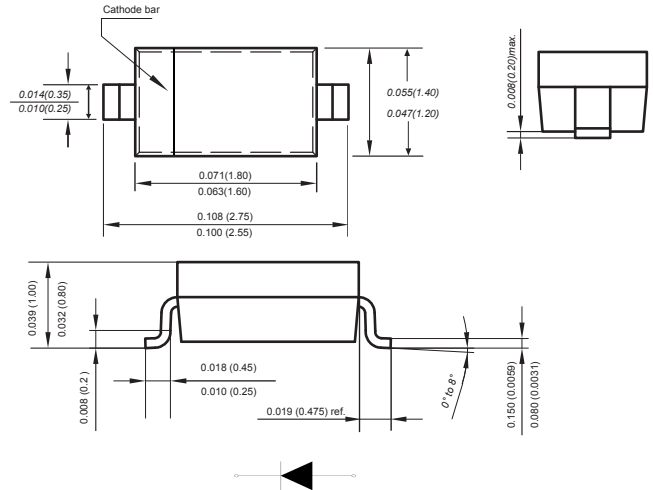

Dimensions in inches and (millimeters)

Absolute Maximum Ratings at 25 °C

PARAMETER	SYMBOLS	SD103AWS	SD103BWS	SD103CWS	UNITS
Peak repetitive peak reverse voltage	V_{RRM}				
Working peak reverse voltage	V_{RMS}	40	30	20	VOLTS
DC Blocking voltage	V_{DC}				
RMS Reverse voltage	$V_{R(RMS)}$	28	21	14	V
Forward continuous current	I_{FM}		350		mA
Repetitive peak forward current @ $t \leq 10s$	I_{FRM}		1.5		A
Power dissipation	P_d		200		mW
Thermal resistance junction to ambient	$R_{\theta JA}$		300		°C/W
Storage temperature	T_{STG}		-65 to +125		°C

Characteristics at $T_a = 25^\circ C$

PARAMETER	SYMBOLS	Min.	Typ.	Max.	Unit	Conditions
Reverse breakdown voltage	$V_{(BR)}$	40			V	$I_R = 10 \mu A$
Reverse voltage		30			V	$I_R = 10 \mu A$
		20			V	$I_R = 10 \mu A$
Forward voltage	V_F			0.37	V	$I_F = 20 mA$
				0.60	V	$I_F = 200 mA$
Reverse current	I_{RM}			5.0	μA	$V_R = 30 V$
					μA	$V_R = 20 V$
					μA	$V_R = 10 V$
Capacitance between terminals	C_T		50		pF	$V_R = 0 V, f = 1.0 MHz$
Reverse recovery time	t_{rr}		10		ns	$I_F = I_R = 200 mA$
						$I_{rr} = 0.1 \times I_R, R_L = 100 \Omega$



SD103AWS THRU SD103CWS

Reverse Voltage 20-40 Volts Forward Current - 0.35 Ampere

Typical Characteristics

FIG. 1- TYPICAL FORWARD CHARACTERISTICS


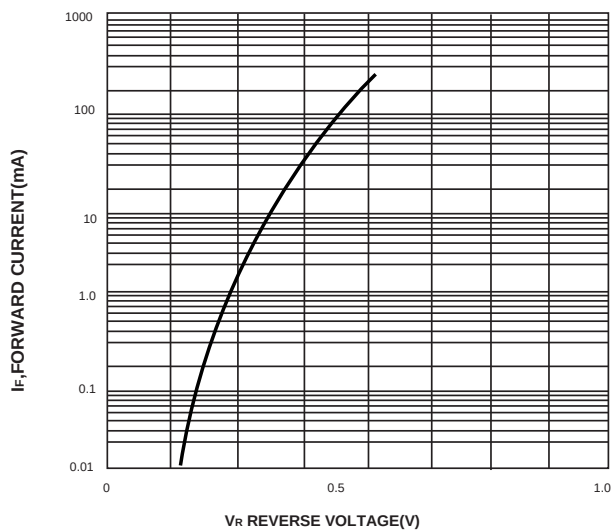


FIG. 2-TYP. JUNCTION CAPACITANCE VS REVERSE VOLTAGE




The curve above is for reference only.

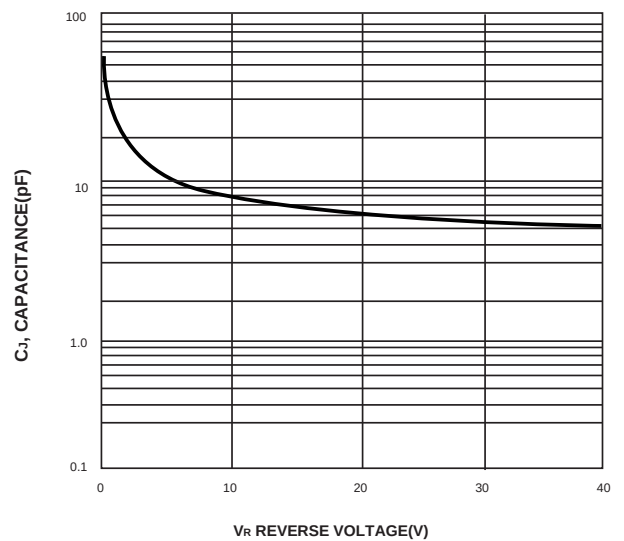

SD103AWS THRU SD103CWS

Reverse Voltage 20-40 Volts Forward Current - 0.35 Ampere

Packing information

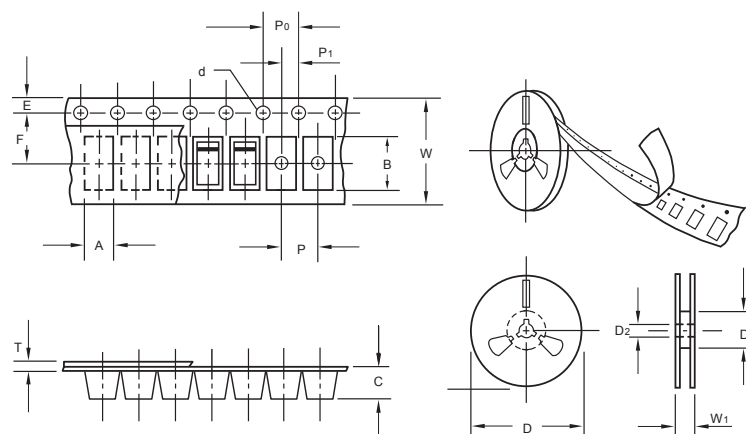

unit:mm


Item	Symbol	Tolerance	SOD-323
Carrier width	A	0.1	2.1
Carrier length	B	0.1	4.0
Carrier depth	C	0.1	1.60
Sprocket hole	d	0.05	1.55
7" Reel outside diameter	D	2.0	178.00
7" Reel inner diameter	D ₁	min	50.0
Feed hole diameter	D ₂	0.5	13.00
Sprocket hole position	E	0.1	1.75
Punch hole position	F	0.1	3.50
Punch hole pitch	P	0.1	4.00
Sprocket hole pitch	P ₀	0.1	4.00
Embossment center	P ₁	0.1	2.00
Overall tape thickness	T	0.1	0.25
Tape width	W	0.3	8.15
Reel width	W ₁	1.0	10.5

Note: Devices are packed in accordance with EIA standard RS-481-A and specifications listed above.

Reel packing

PACKAGE	REEL SIZE	REEL (pcs)	COMPONENT SPACING (m/m)	BOX (pcs)	INNER BOX (m/m)	REEL DIA, (m/m)	CARTON SIZE (m/m)	CARTON (pcs)	APPROX. GROSS WEIGHT (kg)
SOD-323	7"	3,000	4.0	45,000	210*208*203	178	430*430*235	180,000	

Suggested Pad Layout

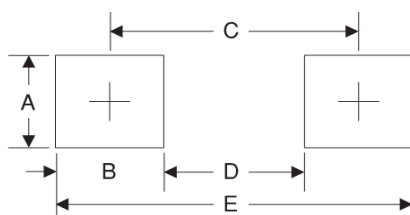

Symbol	Unit (mm)	Unit (inch)
A	0.7	0.028
B	0.7	0.028
C	2.15	0.085
D	1.8	0.071
E	2.85	0.112

Important Notice and Disclaimer

Microdiode Electronics (Jiangsu) reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

Microdiode Electronics (Jiangsu) makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Microdiode Electronics (Jiangsu) assume any liability for application assistance or customer product design. Microdiode Electronics (Jiangsu) does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of Microdiode Electronics (Jiangsu).

Microdiode Electronics (Jiangsu) products are not authorized for use as critical components in life support devices or systems without express written approval of Microdiode Electronics (Jiangsu).