HXA Upgrade! Series

- High reliability and high voltage are realized by hybrid electrolyte
- Endurance with ripple current : 4,000 hours at 125℃
- For high temperature and high reliability applications.
  (Automotive equipment, Base station equipment, etc.)
- RoHS2 Compliant
- Halogen Free
- AEC-Q200 compliant : Please contact Chemi-Con for more details, test data, information.

HXA
↑ Higher temperature
HXB




◆SPECIFICATIONS


Items	Characteristics		
Category Temperature Range	-55 to +125℃		
Rated Voltage Range	80V_{dc}		
Capacitance Tolerance	±20% (M)		(at 20℃, 120Hz)
Leakage Current	I=0.01CV or 3μA, whichever is greater Where, I : Max. leakage current (μA), C: Nominal capacitance(μF), V : Rated voltage(V)		(at 20℃ after 2 minutes)
Dissipation Factor (tan δ)	Rated voltage(V_{dc})	80V	
	tan δ (Max.)	0.08	(at 20℃, 120Hz)
Low Temperature Characteristics (Max. Impedance Ratio)	Z(-25℃)/Z(+20℃)≦1.5 Z(-55℃)/Z(+20℃)≦2.0		(at 100kHz)
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20℃ after subjected to DC voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for 4,000 hours at 125℃.		
	Capacitance change	≦±30% of the initial value	
	D.F. (tan δ)	≦ 200% of the initial specified value	
	ESR	≦ 200% of the initial specified value	
	Leakage current	≦ The initial specified value	
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for 1,000 hours at 125℃ without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C 5101-4.		
	Capacitance change	≦±30% of the initial value	
	D.F. (tan δ)	≦ 200% of the initial specified value	
	ESR	≦ 200% of the initial specified value	
	Leakage current	≦ The initial specified value	

◆DIMENSIONS [mm]

● Terminal Code : A
● Size code : HA0 and JA0

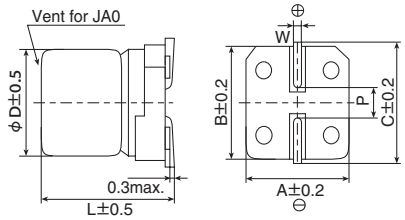

● Terminal Code : G(Vibration resistant structure)
● Size code : HA0 and JA0

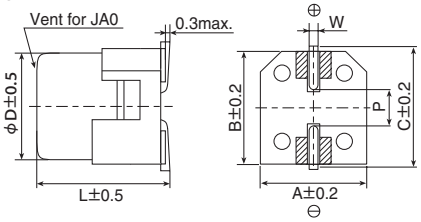

Size Code	ϕD	L	A	B	C	W	P
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5

▨ : Dummy terminals

◆PART NUMBERING SYSTEM

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
H	H	X	A					R	A				M				G

- Supplement code
- Size code
- Capacitance tolerance code
- Capacitance code (ex. 22μF:220)
- Taping code
- Terminal code
- Voltage code (ex. 80V:800)
- Series code
- Category

Please refer to "Product code guide (conductive polymer hybrid type)"

◆MARKING

EX) 80V22μF



●Rated voltage symbol

Rated voltage (V_{dc})	Symbol
80	K

Product specifications in this catalog are subject to change without notice.Request our product specifications before purchase and/or use. Please use our products based on the information contained in this catalog and product specifications.

HXA Upgrade! Series

◆STANDARD RATINGS

WV (V_{dc})	Cap (μF)	Size code	ESR (mΩ max./20℃, 100kHz)	Rated ripple current (mArms/125℃, 100kHz)	Part No.
80	22	HA0	45	1,100	HHXA800□RA220MHA0G
	39	JA0	35	1,200	HHXA800□RA390MJA0G
	47	JA0	33	1,700	HHXA800□RA470MJA0G

□ : Enter the appropriate terminal code.

◆RATED RIPPLE CURRENT MULTIPLIERS

●Frequency Multipliers

Capacitance(μF) \ Frequency(Hz)	120	1k	5k	10k	20k	30k	100k to 500k
22	0.07	0.30	0.50	0.60	0.70	0.75	1.00
39 to 47	0.10	0.40	0.60	0.70	0.80	0.80	1.00

Product specifications in this catalog are subject to change without notice.Request our product specifications before purchase and/or use. Please use our products based on the information contained in this catalog and product specifications.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

United Chemi-Con (UCC):

HHXA250ARA101MF80G HHXA160ARA471MJA0G HHXA350ARA151MHA0G HHXA630ARA330MHA0G HHXA500ARA220MF61G HHXA500ARA101MJA0G HHXA250ARA560MF61G HHXA630ARA220MF80G HHXA160ARA820MF61G HHXA350ARA271MJA0G HHXA500ARA330MF80G HHXA350ARA470MF61G HHXA630ARA100MF61G HHXA250ARA331MJA0G HHXA500ARA680MHA0G HHXA250ARA221MHA0G HHXA160ARA151MF80G HHXA350ARA680MF80G HHXA630ARA560MJA0G HHXA160ARA271MHA0G HHXA800ARA390MJA0G HHXA800ARA220MHA0G HHXA500ARA470MHA0G HHXA350GRA271MJA0G