




1N4148WS

SOD-323

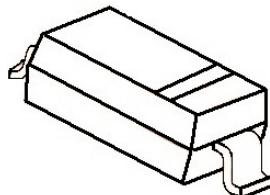

MARKING: T4

SOD-323 贴片塑封二极管

200mW SOD-323 Fast Switching Diode

## 特征 Features

- 开关速度小于 4.0nS; Fast Switching Device (TRR <4.0 nS)
- 最大功率耗散 200mW; Power Dissipation of 200mW
- 高稳定性和可靠性。High Stability and High Reliability
- 反向漏电流小。Low reverse leakage

## 机械数据 Mechanical Data

- 封装: SOD-323 封装 SOD-323 Small Outline Plastic Package
- 极性: 色环端为负极 Polarity: Color band denotes cathode end
- 安装位置: 任意 Mounting Position: Any

极限值和温度特性(TA = 25°C 除非另有规定)





Maximum Ratings &amp; Thermal Characteristics (Ratings at 25°C ambient temperature unless otherwise specified.)

参数 Parameters	符号 Symbol	数值 Value	单位 Unit
反向电压 Reverse Voltage	VR	71	V
反向峰值电压 Peak Reverse Voltage	VRM	100	V
功率消耗 Power Dissipation	Pd	200	mW
工作结温 Operating junction temperature	Tj	125	°C
存储温度 Storage temperature range	Ts	-55~+150	°C
热阻 Thermal Resistance from Junction to Ambient	R <sub>θJA</sub>	625	°C/W
反向工作电压 Working Inverse Voltage	WIV	75	V
平均整流电流 Average Rectified Current	Io	150	mA
正向(不重复)电流 Non-repetitive Peak Forward Current	IFM	300	mA
正向(不重复)浪涌电流 Peak Forward Surge Current @tp=1us; TA=25°C	IFSM	2.0	A

Valid provided that electrodes are kept at ambient temperature.

电特性 Electrical Characteristics (Ratings at 25°C ambient temperature unless otherwise specified).

符号 Symbols	参数 Parameter	测试条件 Test Condition	界限 Limits		单位 Unit
			Min	Max	
BV	反向击穿电压	IR=100uA	100		V
	Breakdown Voltage	IR=5uA	75		
IR	反向漏电电流	VR=20V	---	25	nA
	Reverse Leakage Current	VR=75	---	1	
VF	正向电压	IF=1.0mA	---	0.715	V
	Forward Voltage	IF=10mA	---	0.855	
		IF=50mA	---	1.00	
		IF=150mA	---	1.25	
TRR	反向恢复时间	IF= IR=10mA			nS
	Reverse Recovery Time	RL=100Ω		4	
		IRR=0.1 X IR			
CT	结电容	VR=0V, f=1MHZ			pF
	Capacitance		---	2	

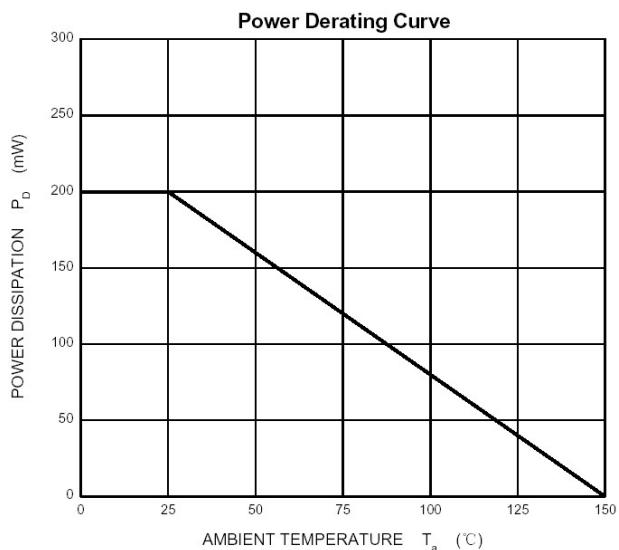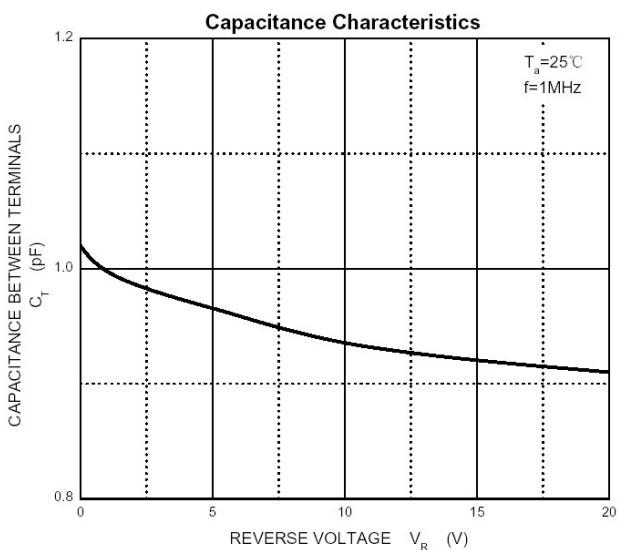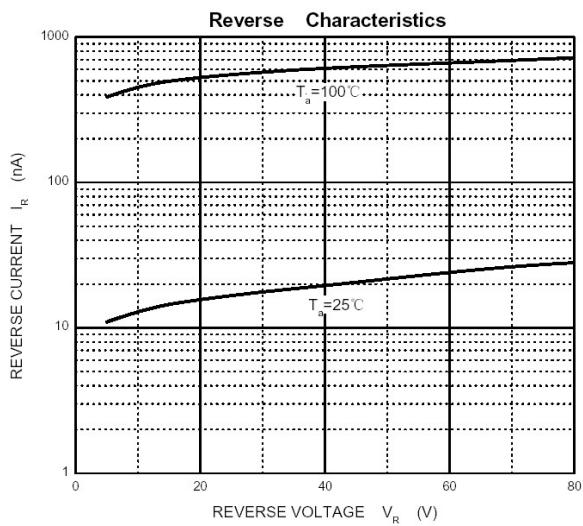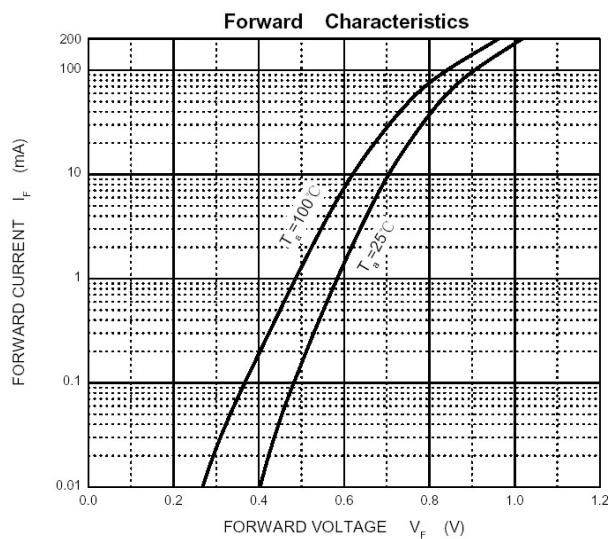

## SOD-323 PACKAGE OUTLINE

Plastic surface mounted package

**SOD-323**

