


POWER RELAY

1 POLE - 5A Change Over Relay

FTR-F3 Series

■ FEATURES

- High density mounting
Height: 15mm
Mounting space: 164mm²
- High insulation
Insulation distance: 7mm between coil and contacts
(conforms to IEC 60065)
Dielectric strength: 4KV
Surge strength: 10KV
- Cadmium free contact for eco-program
- Safety standards
UL, CSA, VDE
- Plastic sealed relay, RTIII
- RoHS compliant
Please see page 6 for more information

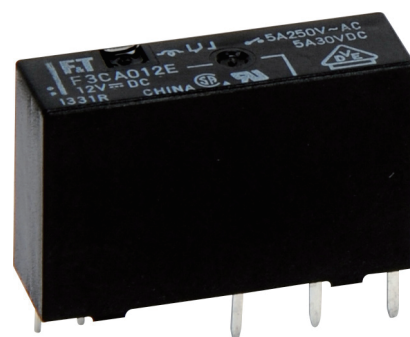

■ Part Numbers

[Example]	FTR-F3	C	A	012	E
	(a)	(b)	(c)	(d)	(e)

(a)	Relay type	FTR-F3 : FTR-F3 series
(b)	Contact configuration	C : 1 form C
(c)	Coil type (power)	A : 360mW
(d)	Coil rated voltage	012 : 5..... 24VDC Coil rating table at page 3
(e)	Contact material	E : AgNi

Actual marking does not carry the type name: "FTR"

E.g.: Ordering code: FTR-F3CA012E Actual marking: F3CA012E

FTR-F3 Series

■ Specifications

Item			FTR-F3	Remarks / conditions
Contact data	Configuration		1 form C	
	Construction		Single	
	Material		AgNi	
	Resistance		Max. 100mΩ	Initial at 1A, 6VDC
	Contact rating		5A, 250VAC, 30VDC	Resistive
	Max. carrying current		5A	
	Max. switching voltage		277VAC, 30VDC	
	Max. switching power		1,250VA, 150W	
	Min. switching load ^{*1}		10 mA, 5VDC	
Coil	Rated power (20°C)		360mW	
	Operating temperature range		-40°C ~ +70°C (at rated voltage)	No frost
Timing data	Operate		Max. 10ms	without bounce
	Release		Max. 10ms	without bounce
Life	Mechanical		Min. 2 x 10 ⁶ operations	
	Electrical (resistive)		Min. 100 x 10 ³ operations (3A, 250VAC/30VDC) Min. 50 x 10 ³ operations (5A, 250VAC/30VDC)	At rated load
Insulation	Insulation resistance		Min. 1000MΩ at 500VDC	
	Dielectric strength	Open contacts	750VAC (50/60Hz), 1 minute	
		Coil contact	4000VAC (50/60Hz), 1 minute	
	Surge strength	Coil to contacts	10,000V / 1.2 x 50μs standard wave	
	Clearance		7mm	
	Creepage		7mm	
	EN61810-1, VDE0435	Voltage	250V	
		Pollution	2	
		Material group	III	
Other	Vibration resistance	Misoperation	10Hz ~ 55Hz ~ 10Hz single amplitude 0.75mm	
		Endurance	10Hz ~ 55Hz ~ 10Hz single amplitude 0.75mm	
	Shock resistance	Misoperation ≥1us	Min. 100m/s ² (11 ± 1ms)	
		Endurance	Min. 1,000m/s ² (6 ± 1ms)	
	Dimensions / weight		7.0 x 23.4 x 15.0 mm / approx. 6g	
	Sealing		Plastic sealed RTIII	

^{*1}: Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions

FTR-F3 Series

■ Coil Data

Coil code	Rated Coil Voltage (VDC)	Coil Resistance +/-10% (Ω)	Must Operate Voltage* (VDC)	Must Release Voltage* (VDC)	Rated Power (mW)
005	5	69	3.75	0.5	360
006	6	100	4.5	0.6	
009	9	225	6.75	0.9	
012	12	400	9	1.2	
018	18	900	13.5	1.8	
024	24	1,600	18	2.4	

Note: All values in the table are valid at 20°C and zero contact current, unless otherwise specified.

*: Specified operated values are valid for pulse wave voltage.

Note: Please use at rated coil voltage. Please refer to characteristic data and set up adequate voltage in case of use at over voltage.

■ Safety Standards


Type	Compliance	Contact rating
UL	UL 508 File No. E63614	Flammability: UL 94-V-0 (plastics)
		5A, 30 VDC / 250VAC (resistive) 3A, 30 VDC / 250 VAC (resistive)
CSA	C22.2 No. 14 File No. LR 40304	
VDE	IEC/EN61810-1 EN60065 clause 14.6.1	5A, 250 VAC, $\cos\phi=1$ 5A, 30 VDC L/R=0ms 3A, 250 VAC, $\cos\phi=1$ 3A, 30 VDC L/R=0ms
CQC	GB15092.1 / GB/T21811.1 17002164382, 04001010925	5A 250VAC / 30VDC

FTR-F3 Series


■ Characteristic Data (Reference)

* Characteristic data is not guaranteed value but measured values of samples from production line.


Coil Temperature Rise

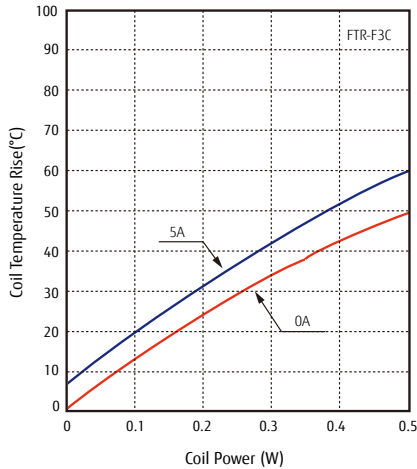


Operating Range

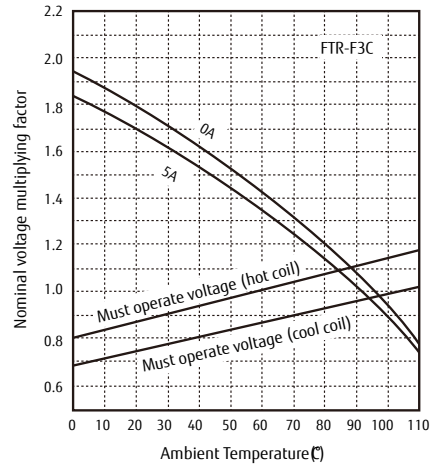


Maximum Switching Power

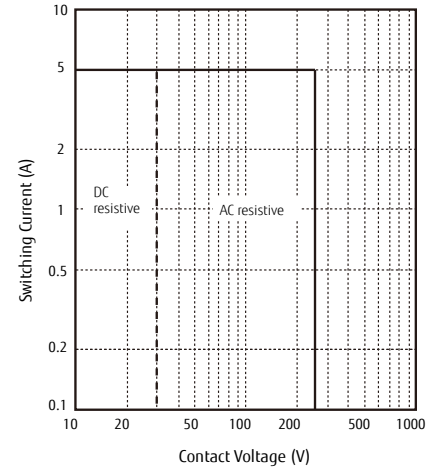


Life Curve

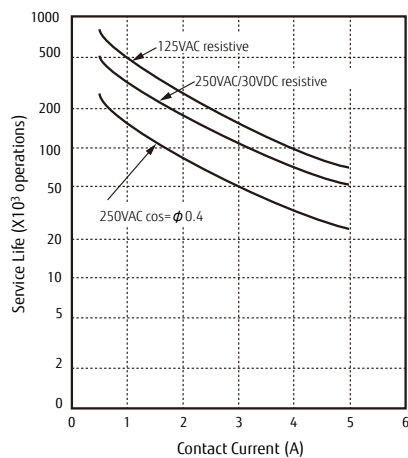


Distribution of Contact Resistance (N.O.)

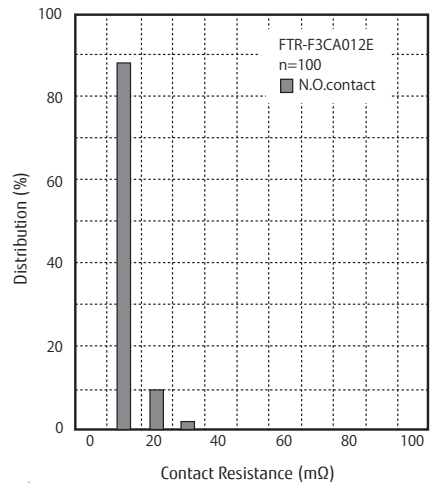


Distribution of Contact Resistance (N.C.)

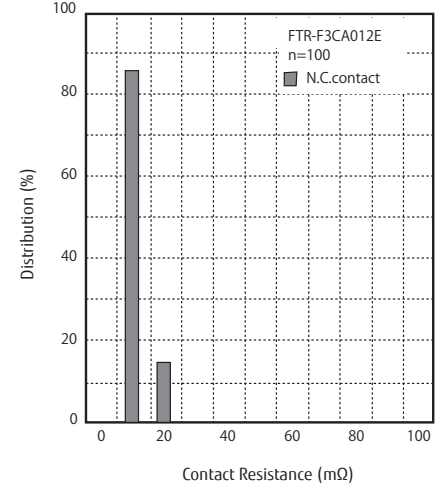


Distribution of Operation & Release Voltage

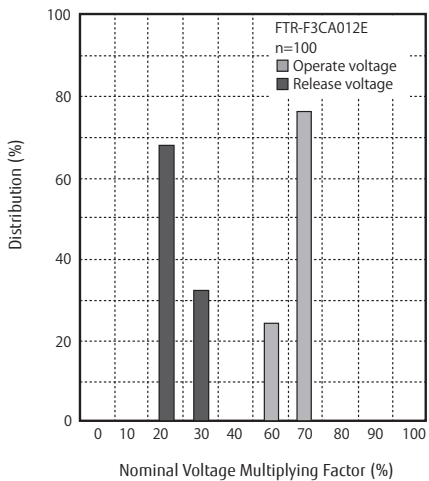

Distribution of Operation Time

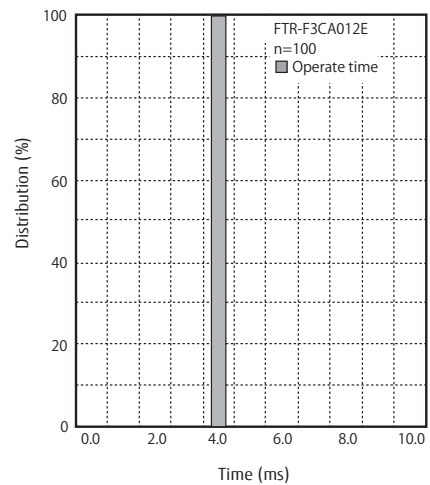

Distribution of Release Time

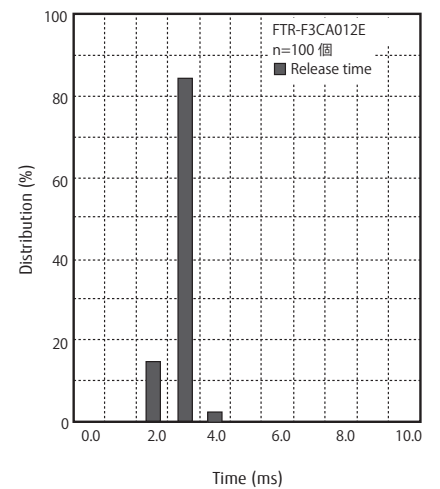


FTR-F3 Series

■ Dimensions

- Dimensions


Changeover contact type

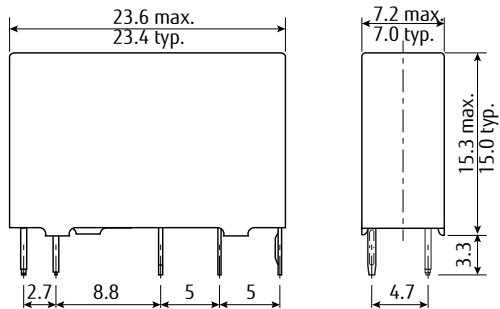


* Dimensions do not include tolerances.

* Dimensions of the terminals do not include thickness of pre-solder.

- Schematics
(BOTTOM VIEW)



- PC Board Mounting Hole Layout
(BOTTOM VIEW)

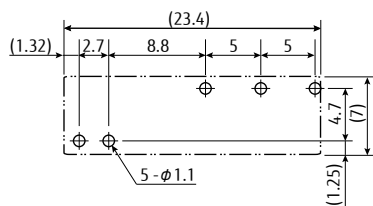

(): Reference value

Unit: mm

* Tolerance of PC board mounting hole layout : ± 0.1 unless otherwise specified.

FTR-F3 Series

CAUTIONS

- All values mentioned in this datasheet are provided under ideal conditions. Please perform the confirmation test before actual use.
- Reflow soldering is prohibited.
- Do not use relays in the atmosphere with sulfide gas, chloride gas or nitric oxide. Contact resistance may increase.
- Do not use silicon or silicon-containing product or materials near relays. It may cause contact failure.

GENERAL INFORMATION

1. ROHS Compliance

- All relays produced by Fujitsu Components are compliant with RoHS directive 2011/65/EU, including commission delegated directive 2015/863.

2. Recommended lead free solder condition

- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.
- Recommended solder for assembly: Sn-3.0Ag-0.5Cu.

Flow Solder Condition:

Pre-Heating: maximum 120°C
within 90 sec.

Soldering: dip within 5 sec. at 255°C±5°C solder bath

Relay must be cooled by air immediately after soldering

Solder by Soldering Iron:

Soldering Iron: 30-60W

Temperature: maximum 340-360°C

Duration: maximum 3 sec.

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

FTR-F3 Series

Fujitsu Components International Headquarter Offices

Japan FUJITSU COMPONENT LIMITED Shinagawa Seaside Park Tower 19F, 12-4, Higashi-shinagawa 4-chome, Shinagawa-ku, Tokyo, 140-0002, Japan Tel: (81-3) 3450-1682 Fax: (81-3) 3474-2385 Email: fcl-contact@cs.jp.fujitsu.com Web: www.fujitsu.com/jp/fcl/	Asia Pacific FUJITSU COMPONENTS ASIA, LTD. 102E Pasir Panjang Road #01-01 Citilink Warehouse Complex Singapore 118529 Tel: (65) 6375-8560 Fax: (65) 6273-3021 Email: fcal@sg.fujitsu.com Web: www.fujitsu.com/sg/products/devices/components	Korea FUJITSU COMPONENTS KOREA LIMITED Alpha Tower #403, 645 Sampyeong-dong, Bundang-gu, Seongnam-si, Gyeonggi-do, 13524 Korea Tel: (82) 31-708-7108 Fax: (82) 31-709-7108 Email: fcal@sg.fujitsu.com www.fujitsu.com/sg/products/devices/components/
North and South America FUJITSU COMPONENTS AMERICA, INC 1230 E. Arques Ave. M/S 160 Sunnyvale, CA. 94085, USA Tel: (1-408) 745-4900 Fax: (1-408) 745-4970 Email: components@us.fujitsu.com Web: us.fujitsu.com/components	China FUJITSU ELECTRONIC COMPONENTS (SHANGHAI) CO., LTD. Unit 4306, InterContinental Center 100 Yu Tong Road, Shanghai 200070, China Tel: (86-21) 3253 0998 Fax: (86-21) 3253 0997 Email: fcsh@cn.fujitsu.com Web: www.fujitsu.com/cn/products/devices/components/	
Europe FUJITSU COMPONENTS EUROPE B.V. Diamantlaan 25 2132 WV Hoofddorp Netherlands Tel: (31-23) 5560910 Fax: (31-23) 5560950 Email: info@fceu.fujitsu.com Web: www.fujitsu.com/uk/components	Hong Kong FUJITSU COMPONENTS HONG KONG CO., LTD Unit 506, Inter-Continental Plaza No.94 Granville Road, Tsim Sha Tsui, Kowloon, Hong Kong Tel: (852) 2881-8495 Fax: (852) 2894-9512 Email: fcal@sg.fujitsu.com Web: www.fujitsu.com/sg/products/devices/components/	

© 2021 Fujitsu Components Europe B.V. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Products are intended for general use, including without limitation, in personal, household and office environments, in buildings and for ordinary use in the industry. Fujitsu Products are not intended to be used in applications where extremely high safety is required ("High Safety Required Applications"), such as, but not limited to, applications in nuclear facilities, in aircraft automatic flight control, in air traffic control, in mass transit system control, in missile launch systems, in weapon systems, in medical equipment for life support or any application involving a direct serious risk of physical injury or death. Please do not use Fujitsu Products without securing the sufficient safety and reliability required for the High Safety Required Applications. In addition, Fujitsu shall not be liable against the customer and/or any third party for any claims or damages arising in connection with the use of Fujitsu Products in the High Safety Required Applications. Fujitsu warrants that its Products, if properly used and serviced, will conform to their specification and will be free from defects in material and workmanship for twelve months from delivery. The implied warranties of merchantability and fitness for a particular purpose and all other warranties, representations and conditions, express or implied by statute, trade usage or otherwise, except as set forth in this warranty, are excluded and shall not apply to the Products delivered.

The contents, data and information in this datasheet are provided by Fujitsu Component Ltd. as a service only to its user and only for general information purposes. The use of the contents, data and information provided in this datasheet is at the users' own risk. Fujitsu has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date. Fujitsu Components Europe B.V. and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Nor do Fujitsu Components Europe B.V. and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. March 1, 2021