
KOA SPEER ELECTRONICS, INC.

RN73R

precision thin (metal) film flat chip resistors (high reliability)


EU RoHS COMPLIANT

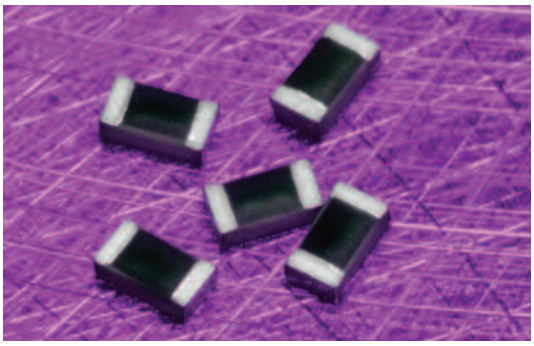

features


- AEC-Q200 Tested
- Endurance at 85°C (1,000h): ΔR of ±0.1%
- High temperature exposure: ΔR of ±0.25%
- High precision type ±0.05% is also available
- Low current noise
- Improved moisture resistance by high humidity protective coating
- Suitable for control circuits in various industrial equipment
- Products meet EU RoHS requirements
- Rated ambient temperature: 85°C, rated up to +155°C
- Sulfur resistance verified according to ASTM B 809-95

dimensions and construction

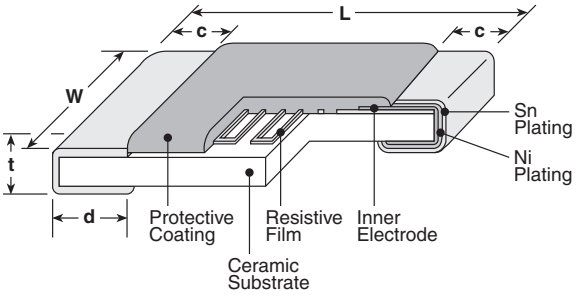


Type (Inch Size Code)	Dimensions inches (mm) L	W	c	d	t
1E (0402)	.039 +.004 -.002 (1.0 +0.1 -0.05)	.020±.002 (0.5±0.05)	.010±.004 (0.25±0.1)	.010 +.002 -.004 (0.25 +0.05 -0.1)	.014±.002 (0.35±0.05)
1J (0603)	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.018±.004 (0.45±0.1)
2A (0805)	.079±.008 (2.0±0.2)	.049±.008 (1.25±0.2)	.016±.008 (0.4±0.2)	.012 +.008 -.004 (0.3 +0.2 -0.1)	.02±.004 (0.5±0.1)
2B (1206)	.126±.008 (3.2±0.2)	.063±.008 (1.6±0.2)	.02±.012 (0.5±0.3)	.016 +.008 -.004 (0.4 +0.2 -0.1)	.024±.004 (0.6±0.1)
2E (1210)	.126±.008 (3.2±0.2)	.098±.008 (2.5±0.2)	.02±.012 (0.5±0.3)	.016 +.008 -.004 (0.4 +0.2 -0.1)	.024±.004 (0.6±0.1)

Derating Curve

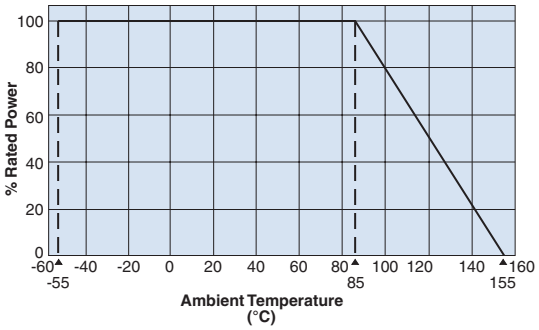

For resistors operated at an ambient temperature of 85°C or above, a power rating shall be derated in accordance with the above derating curve.

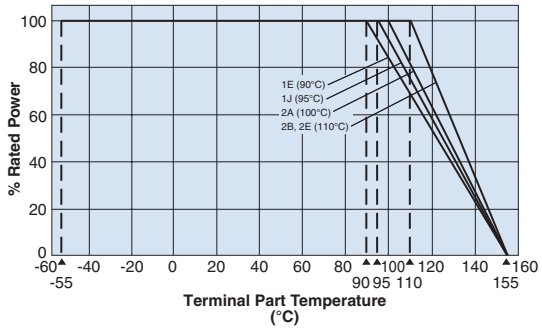

For resistors operated at a terminal part temperature of described for each size or above, a power rating shall be derated in accordance with derating curve. Please refer to "Introduction of the derating curves based on the terminal part temperature" in the beginning of our catalog before use.

ordering information

RN73R	2B	T	TD	1002	B	25
Type	Size	Termination Material	Packaging	Nominal Resistance	Resistance Tolerance	T.C.R. (ppm/°C)
	1E: 0.063W 1J: 0.1W 2A: 0.125W 2B: 0.25W 2E: 0.25W	T: Sn	TP: 2mm pitch punched paper TD: 4mm pitch punched paper TE: 4mm pitch plastic embossed For further information on packaging, please refer to Appendix A	3 significant figures + 1 multiplier "R" indicates decimal on value <100Ω	A: ±0.05% B: ±0.1% C: ±0.25% D: ±0.5% F: ±1.0%	05 10 25 50 100

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use. 11/04/21

KOA SPEER ELECTRONICS, INC.

RN73R

precision thin (metal) film flat chip resistors (high reliability)

applications and ratings

Part Designation	Power Rating @ 85°C	Rated Ambient Temp.	Rated Terminal Part Temp.	T.C.R. (x10⁻⁶/K)	Resistance Range (Ω) E-24, E-96, E-192 (A±0.05%)	(B±0.1%)	(C±0.25%)	(D±0.5%)	(F±1.0%)	Maximum Working Voltage	Maximum Overload Voltage
RN73R1E	1/16W (.063W)	85°C	90°C	±10	—	47 - 10k	47 - 10k	47 - 10k	47 - 10k	50V	100V
				±25	—	47 - 300k	47 - 300k	10 - 300k	10 - 300k		
				±50	—	47 - 300k	47 - 300k	10 - 300k	10 - 300k		
RN73R1J	1/10W (.10W)	85°C	95°C	±5	100 - 59k	100 - 59k	—	—	—	75V	150V
				±10	47 - 59k	47 - 59k	47 - 59k	47 - 59k	47 - 59k		
				±25	47 - 59k	15 - 1M	15 - 1M	10 - 1M	10 - 1M		
				±50	—	15 - 1M	15 - 1M	10 - 1M	10 - 1M		
				±100	—	—	—	10 - 1M	10 - 1M		
RN73R2A	1/8W (.125W)	85°C	100°C	±5	100 - 100k	100 - 100k	—	—	—	150V	300V
				±10	47 - 100k	47 - 100k	47 - 100k	47 - 100k	47 - 100k		
				±25	47 - 100k	15 - 1.5M	15 - 1.5M	10 - 1.5M	10 - 1.5M		
				±50	—	15 - 1.5M	15 - 1.5M	10 - 1.5M	10 - 1.5M		
				±100	—	—	—	10 - 1.5M	10 - 1.5M		
RN73R2B	1/4W (.25W)	85°C	110°C	±5	100 - 300k	100 - 300k	—	—	—	200V	400V
				±10	47 - 300k	47 - 300k	47 - 300k	47 - 300k	47 - 300k		
				±25	47 - 300k	15 - 1M	15 - 1M	10 - 1M	10 - 1M		
				±50	—	15 - 1M	15 - 1M	10 - 1M	10 - 1M		
				±100	—	—	—	10 - 1M	10 - 1M		
RN73R2E	1/4W (.25W)	85°C	110°C	±10	100 - 510k	100 - 510k	100 - 510k	100 - 510k	100 - 510k	200V	400V
				±25	51 - 510k	15 - 1M	15 - 1M	10 - 1M	10 - 1M		
				±50	—	15 - 1M	15 - 1M	10 - 1M	10 - 1M		
				±100	—	—	—	10 - 1M	10 - 1M		

Operating Temperature: -55°C to +155°C

Rated voltage = $\sqrt{\text{Power rating x resistance value}}$ or max. working voltage, whichever is lower

environmental applications

Performance Characteristics

Parameter	Requirement Δ R ±(%+0.05Ω) Limit	Typical	Test Method
Resistance	Within specified tolerance	—	25°C
T.C.R.	Within specified T.C.R.	—	+25°C/+125°C: T.C.R. ±5 (x10⁻⁶/K); +25°C/-55°C and +25°C/+155°C: other
Overload (Short time)	±0.05%	±0.01%	Rated Voltage x 2.5 or Max. overload voltage, whichever is less for 5 seconds
Resistance to Solder Heat	±0.05%*	±0.01%	260°C ± 5°C, 10 seconds ± 1 second
Rapid Change of Temperature	±0.1%*	±0.04%	1E, 1J, 2A: -55°C (30 minutes), +155°C (30 minutes), 1000 cycles 2B, 2E: -55°C (30 minutes), +155°C (30 minutes), 500 cycles
Moisture Resistance	±0.25%	±0.07%	85°C ± 2°C, 85%±5%RH, 1000 hours; 1.5 hr ON, 0.5 hr OFF cycle
Endurance at 85°C	±0.1%	±0.04%	85°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
High Temperature Exposure	±0.25%	±0.10%	+155°C, 1000 hours

* Depends on resistance value, please contact KOA Speer for details.

Precautions for Use

- The properly and electrostatically measured taping materials are used for the components, but attention should be paid to the fact that there is some danger the parts absorb on the top tapes to cause a failure in the mounting and the parts are destructed by static electricity (1J, 2A, 2B: 1kV and more, 1E: 0.5kV and more at Human Body Model 100pF, 1.5kΩ) to change the resistance in the conditions of an excessive dryness or after the parts are given vibration for a long time as they are packaged on the tapes. Similarly, care should be given not to apply the excessive static electricity when mounting on the boards.
- Ionic impurities such as flux etc. that are attached to these products or those mounted onto a PCB, negatively affect their moisture resistance, corrosion resistance, etc. The flux may contain ionic substances like chlorine, acid, etc. while perspiration and saliva include ionic impurities like sodium (Na+), chlorine (Cl–) etc. Therefore these kinds of ionic substances may induce electrical corrosion when they invade into the products. Either thorough washing or using RMA solder and flux are necessary since lead free solder contains ionic substances. Washing process is needed, before putting on moisture proof material in order to prevent electrical corrosion.
- When heat-resistant masking tapes are attached to the chip resistors at the time of mounting and then detached, there is a possibility of exfoliation of the top electrodes. It is known that the heat applied in the mounting process will enhance the adhesion strength of the tape adhesive so please avoid the use. If the use of masking tapes are unavoidable, then please be sure not to attach the tape adhesives directly on the products.
  When high-pressure shower cleaning is implemented, there is a possibility of exfoliation of the top electrodes caused by the water pressure stress so please avoid the implementation. If the implementation is unavoidable, then please evaluate the products beforehand.

For Surface Temperature Rise Graph see Environmental Applications. Additional environmental applications can also be found at www.koaspeer.com

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

10/20/20

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

KOA Speer:

RN73R2ATTD8562C10 RN73R2ATTD85R6A10 RN73R2ATTD8660D10 RN73R2ATTD8661F100
RN73R2ATTD8662D100 RN73R2ATTD8662D50 RN73R2ATTD8662F100 RN73R2ATTD8662F25
RN73R2ATTD8662F50 RN73R2ATTD8663D100 RN73R2ATTD8663D50 RN73R2ATTD8663F50
RN73R2ATTD86R6D10 RN73R2ATTD86R6F100 RN73R2ATTD8760D10 RN73R2ATTD8760D50
RN73R2ATTD8760F100 RN73R2ATTD8760F50 RN73R2ATTD8761A10 RN73R2ATTD8761B50
RN73R2ATTD8761C50 RN73R2ATTD8761D100 RN73R2ATTD8762B50 RN73R2ATTD8762D10
RN73R2ATTD8763C25 RN73R2ATTD8763C50 RN73R2ATTD87R6B50 RN73R2ATTD87R6C25
RN73R2ATTD87R6D10 RN73R2ATTD8870C25 RN73R2ATTD8870D10 RN73R2ATTD8871C25
RN73R2ATTD8871C50 RN73R2ATTD8872B50 RN73R2ATTD8872C50 RN73R2ATTD8872D10
RN73R2ATTD8872D100 RN73R2ATTD8872F100 RN73R2ATTD8872F25 RN73R2ATTD8873B50
RN73R2ATTD8873D100 RN73R2ATTD8873F100 RN73R2ATTD88R7D100 RN73R2ATTD88R7D50
RN73R2ATTD88R7F25 RN73R2ATTD88R7F50 RN73R2ATTD8980D50 RN73R2ATTD8981D100
RN73R2ATTD8981D50 RN73R2ATTD8981F50 RN73R2ATTD8982D10 RN73R2ATTD8982D100
RN73R2ATTD8982F100 RN73R2ATTD8983D50 RN73R2ATTD8983F25 RN73R2ATTD8983F50
RN73R2ATTD89R8D50 RN73R2ATTD89R8F25 RN73R2ATTD89R8F50 RN73R2ATTD9090D100
RN73R2ATTD9090D50 RN73R2ATTD9091D10 RN73R2ATTD9201B50 RN73R2ATTD9201C50
RN73R2ATTD9201D10 RN73R2ATTD9202B50 RN73R2ATTD9202C25 RN73R2ATTD9202D10
RN73R2ATTD9202F10 RN73R2ATTD92R0C25 RN73R2ATTD92R0F10 RN73R2ATTD9310D10
RN73R2ATTD9310F10 RN73R2ATTD9311C25 RN73R2ATTD9311D10 RN73R2ATTD9311F10
RN73R2ATTD9312C25 RN73R2ATTD9312D10 RN73R2ATTD9420D10 RN73R2ATTD9420F10
RN73R2ATTD9421D10 RN73R2ATTD9421F10 RN73R2ATTD9530D10 RN73R2ATTD9650F25
RN73R2ATTD98R8C25 RN73R2BTTD1003A05 RN73R2BTTD1004D100 RN73R2BTTD1004F100
RN73R2BTTD1010A05 RN73R2BTTD1010D100 RN73R2BTTD1010D25 RN73R2BTTD1011F100
RN73R2BTTD1012A05 RN73R2BTTD1012D25 RN73R2BTTD1012F100 RN73R2BTTD1012F25
RN73R2BTTD1013A05 RN73R2BTTD1021C10 RN73R2BTTD1022A05 RN73R2BTTD1023C10