

Product Features:




- RoHS compliance Product
- Operating temperature range: -40°C to+105°C.
- Storage temperature range:-40°C to+85°C.


Electrical Specifications @ 25°C

Part Number	Turn Ratio	OCL @10KHz 0.1V		LK @100KHZ 0.1V	DCR		CWW @100KHZ	Hi-Pot (5mA/2s)
	1-4:8-5	1-4	1-4I =30mA	1-4 Tie5-8	1-4	8-5	1-8	1, 4-8, 5
H80804S	1:1±2%	1.4mH ±30%	0.75mH MIN	0.3 uH MAX	200mΩMAX	200mΩMAX	25pF max	5500V AC

Schematic

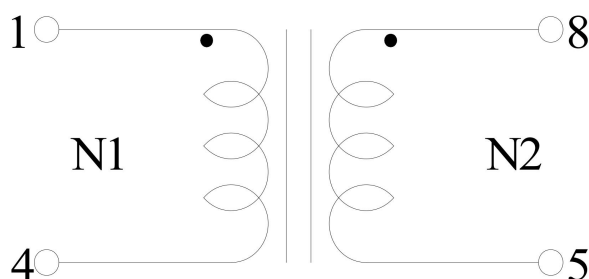

Mechanical

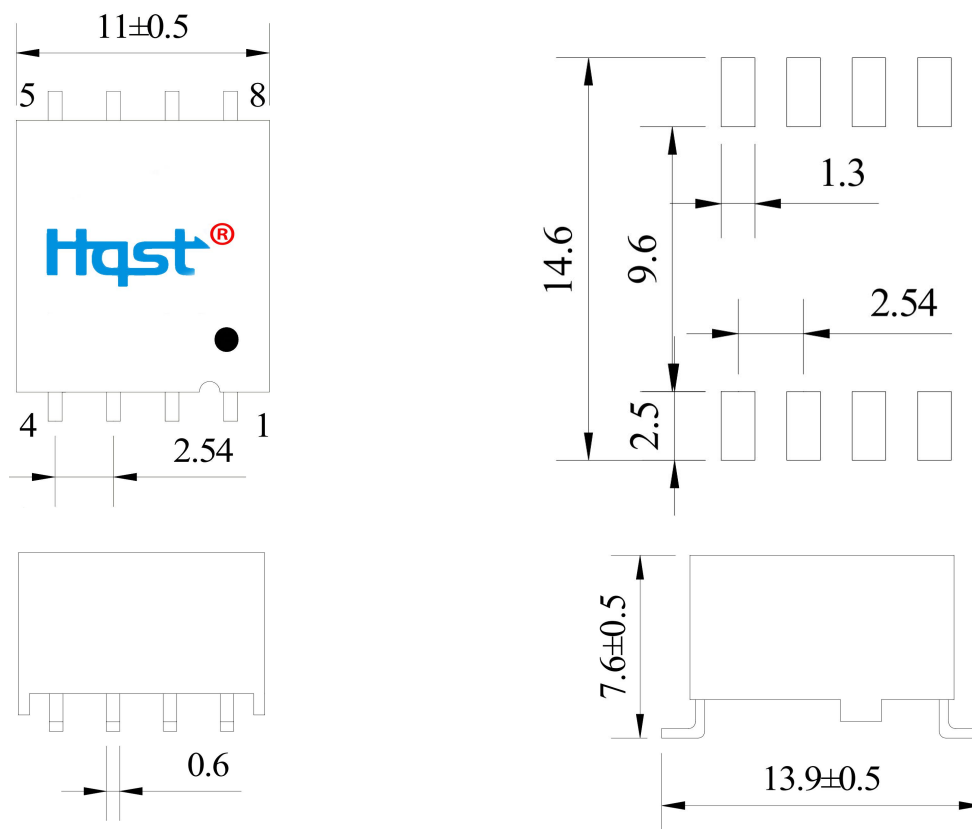

NOTE:

1. Dimensions:mm;

2. Unless otherwise specified, tolerances:±0.25(mm)