

HSF RoHS

SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material: Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (230°C for 10 seconds)

Ordering Information



3811 35 01 0 XX X 0X

Plastics
Height
35=3.5mm

No.of Pins
01=Sing Type

Contact Plating
 G1:Gold Flash
 G2:1.5U" Gold
 G3:2U" Gold
 G4:3U" Gold
 G5:5U" Gold
 N0:Gold Flash/Ni
 NN:Ni

Color Type
 B=Black
 U=Blue
 R=Red
 W=White
 Y=Yellow

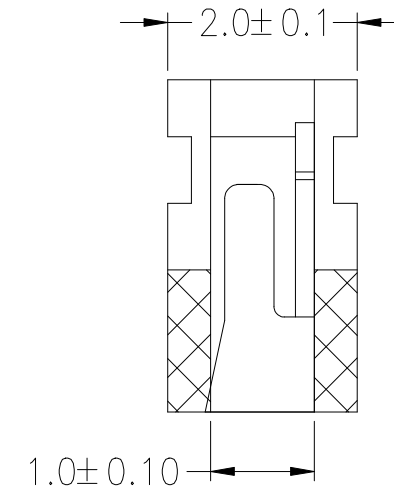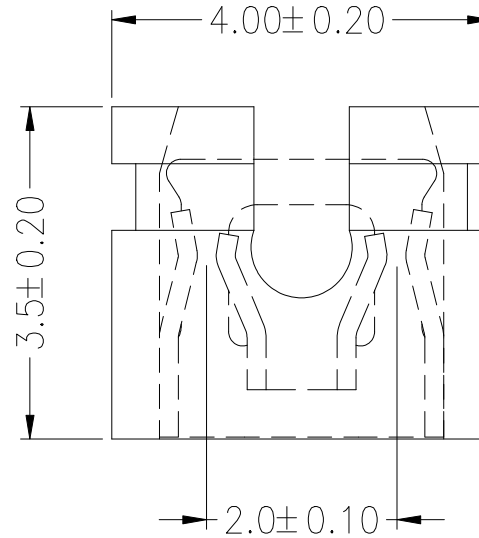

				OPERATION		DRAW	yiyusheng	16.04.18	SCALE	FIT	JILN® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK		SIZE	A4	PART NO. 381135010XXX0X		
				X.XXX	±0.10		SHEET	1/1				
A0	2016.04.18	NEW DRAWING		Angle	±3°	APPROVE		PROJ.		TITLE: 2.00 Mini Jumper Open Type		
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL							
1	2	3	4	5	6	7	8	9				