



Features

- Epitaxial planar die construction
- Complimentary to BC807W
- High collector current
- High current gain
- Low collector-emitter saturation voltage

HF



SOT-323

Mechanical Data

- Case: SOT-323
- Molding compound: UL flammability classification rating 94V-0
- Terminals: Tin-plated; solderability per MIL-STD-202, Method 208

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
BC817-16W	SOT-323	3000 pcs / Tape & Reel	6A
BC817-25W	SOT-323	3000 pcs / Tape & Reel	6B
BC817-40W	SOT-323	3000 pcs / Tape & Reel	6C

Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Collector-Base Breakdown Voltage	V _{CBO}	50	V
Collector-Emitter Breakdown Voltage	V _{CEO}	45	V
Emitter-Base Breakdown Voltage	V _{EBO}	5	V
Continuous Collector Current	I _C	0.5	A
Peak Collector Current	I _{CM}	1	A
Base Current	I _B	0.1	A
Peak Base Current	I _{BM}	0.2	A

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation	P _D	250	mW
Thermal Resistance Junction-to-Air ^{*1}	R _{θJA}	396	°C/W
Thermal Resistance Junction-to-Case ^{*1}	R _{θJC}	197	°C/W
Thermal Resistance Junction-to-Lead ^{*1}	R _{θJL}	218	°C/W
Operating junction Temperature	T _J	-65 ~ +150	°C
Storage Temperature Range	T _{STG}	-65 ~ +150	°C

Note 1: The data tested by surface mounted on a 15mm * 15mm * 1mm FR4-epoxy P.C.B

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter		Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-Base Breakdown Voltage		$V_{(BR)CBO}$	$I_C = 10\mu\text{A}, I_E = 0$	50	-	-	V
Collector-Emitter Breakdown Voltage		$V_{(BR)CEO}$	$I_C = 10\text{mA}, I_B = 0$	45	-	-	V
Emitter-Base Breakdown Voltage		$V_{(BR)EBO}$	$I_E = 10\mu\text{A}, I_C = 0$	5	-	-	V
Collector Cut-off Current		I_{CBO}	$V_{CB} = 25\text{V}, I_E = 0$	-	-	100	nA
Emitter Cut-off Current		I_{EBO}	$V_{EB} = 5\text{V}, I_C = 0$	-	-	100	nA
DC Current Gain	BC817-16W	h_{FE}	$V_{CE} = 1\text{V}, I_C = 100\text{mA}$	100	-	250	-
	BC817-25W			160	-	400	-
	BC817-40W			250	-	600	-
	BC817-16W		$V_{CE} = 1\text{V}, I_C = 300\text{mA}$	60	-	-	-
	BC817-25W			100	-	-	-
	BC817-40W			170	-	-	-
Collector-emitter Saturation Voltage		$V_{CE(sat)}$	$I_C = 500\text{mA}, I_B = 50\text{mA}$	-	-	0.7	V
Base-emitter Saturation Voltage		$V_{BE(sat)}$	$I_C = 500\text{mA}, I_B = 50\text{mA}$	-	-	1.2	V
Transition Frequency		f_T	$I_C = 50\text{mA}, V_{CE} = 5\text{V}, f=100\text{MHZ}$	-	170	-	MHz
Collector Output Capacitance		C_{OBO}	$V_{CB} = 10\text{V}, I_E = 0, f = 1\text{MHZ}$	-	6	-	pF

Ratings and Characteristics Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

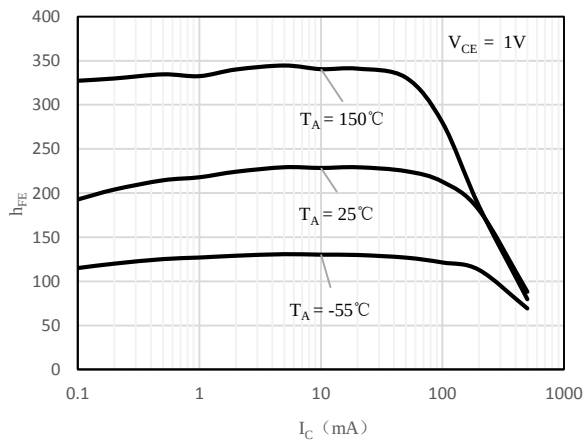


Fig 1 h_{FE} vs. I_C (BC817-16W)

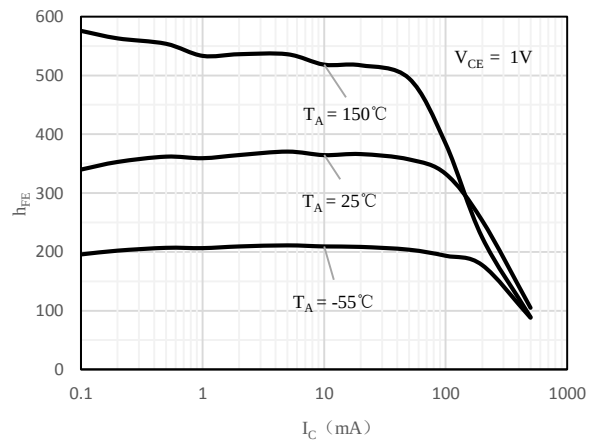


Fig 2 h_{FE} vs. I_C (BC817-25W)

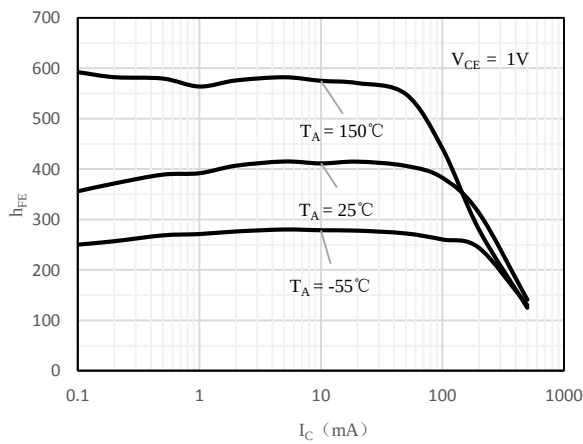


Fig 3 h_{FE} vs. I_C (BC817-40W)

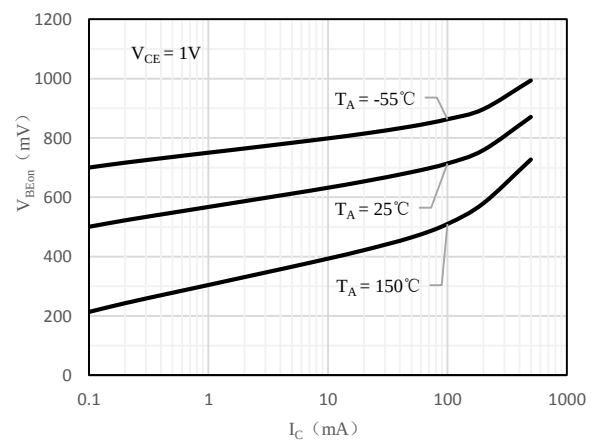


Fig 4 $V_{BE(ON)}$ vs. I_C

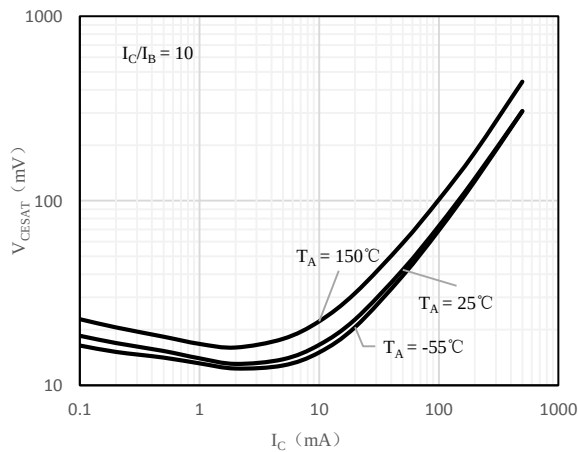


Fig 5 $V_{CE(sat)}$ vs. I_C


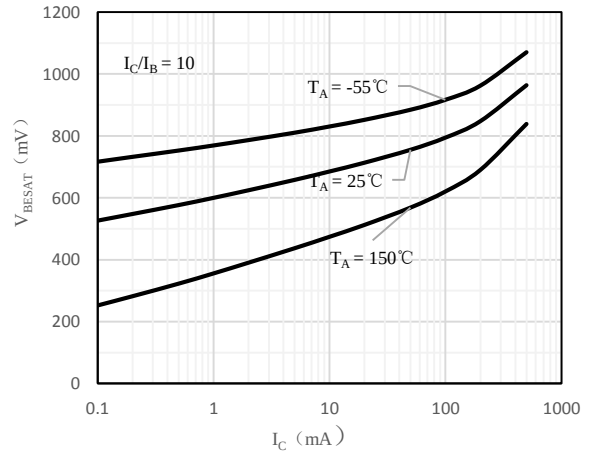


Fig 6 $V_{BE(sat)}$ vs. I_C


Package Outline Dimensions (Unit: mm)

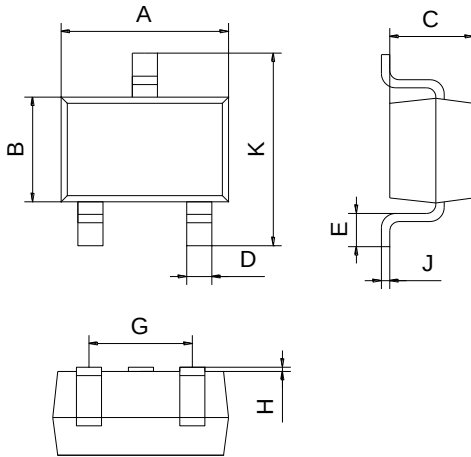

SOT-323		
Dimension	Min.	Max.
A	2.00	2.20
B	1.15	1.35
C	0.90	1.10
D	0.15	0.35
E	0.25	0.40
G	1.20	1.40
H	0.02	0.10
J	0.05	0.15
K	2.20	2.40

Mounting Pad Layout (Unit: mm)

SOT-323

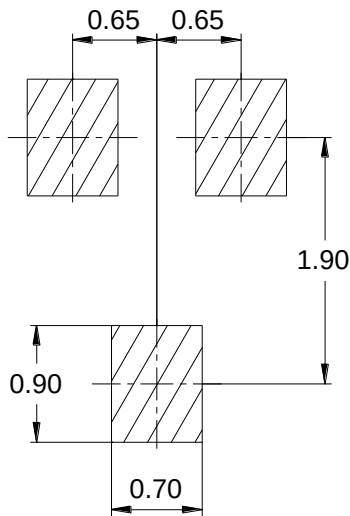

IMPORTANT NOTICE

Changzhou Galaxy Century Microelectronics (GME) reserves the right to make changes without further notice to any product information (copyrighted) herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.