

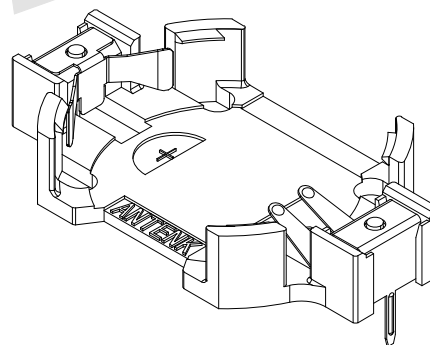

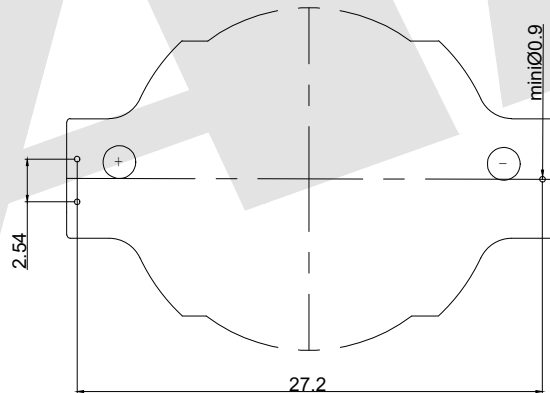
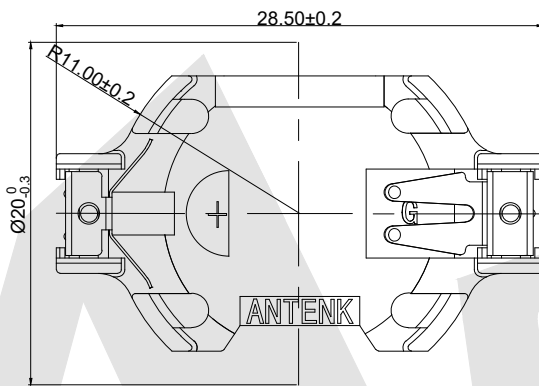


HSF



RoHS

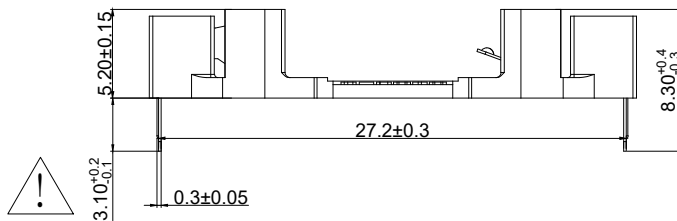

PCB Layout Diagram
Top View

NOTE:

1, Material:

- a. Housing: Glass Fibre UL94V-0
- b. Contact: White
(Surface Plating: Sn 100u")
See Ordering Information

2, Electric:

- a. Contact Resistance: 30 Milliohms Max
- b. Insulation Resistance: 1000 MEGA OHMS Min
- c. Dielectric Voltage: 500V AC One Sea Level
- d. Operating Temperature: -55° To 105°


Order code:

BT - S - SN - R - CR2032H
① ② ③ ④ ⑤

- ① BT: Coin Cell Holders
- ② Apperance for the product
S: 180 TYPE
- ③ Contact Plating
SN: Tin
G0: Gold flash
G1: 3U" Gold
G2: 5U" Gold
G3: 10U" Gold
G4: 15U" Gold
G5: 30U" Gold
- ④ Packing method
A: Tray packing
R: Tape & reel packing
- ⑤ Product number
CR2032H

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE: Oudingping UNIT: mm
DRAW Oudingping DATE 18/02/2020
CHECK BobYang DATE 18/02/2020



Antenk® ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail: sales@antenk.com

TITLE:
Coin Cell Holders For CR2032

DRAWING NO: BT-S-SN-R-CR2032H
PRODUCT NO: BT-S-SN-R-CR2032H



DIP CHANGE 3.5 TO 3.1MM

30/07/2020

DATE

REV

DESCRIPTION