






HSF



RoHS

Specifications:
 Current rating: 2A AC, DC (AWG #24)
 Voltage rating: 100V AC, DC
 Temperature range: -25°C to +85°C
 (including temperature rise in applying electrical current)
 Contact resistance: Initial value/30mΩ max.
 After environmental testing/60mΩ max.
 Insulation resistance: 500MΩ min.
 Withstanding voltage: 500V AC/minute
 Applicable wire: Conductor size/AWG #28 to #24
 Insulation O.D./0.8 to 1.2mm

Terminal:
 Part NO.: AT1504-xP
 Material: Phosphor Bronze, T=0.15mm
 Plating: Tin Plated over Ni
 Mates with: AH1504 series Housing

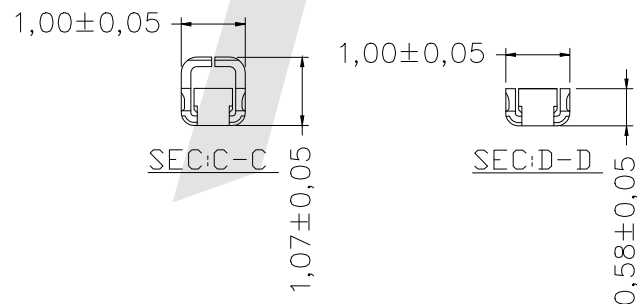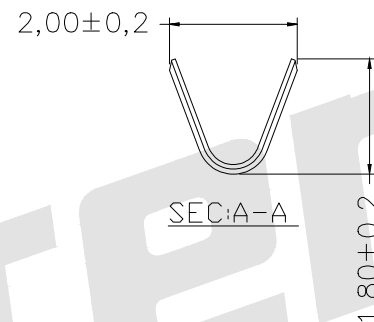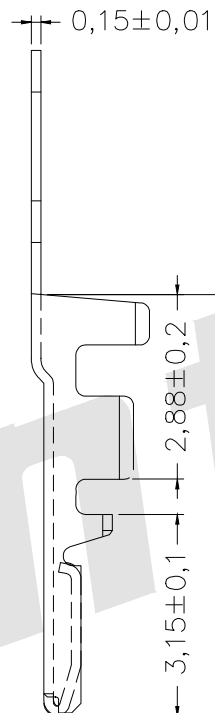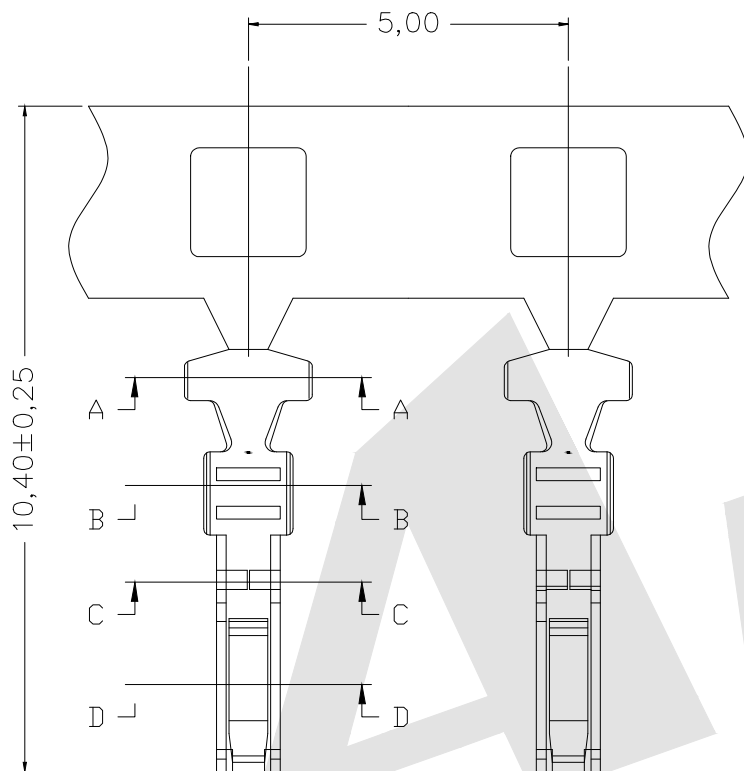


Unless Otherwise specified tolerance	
X. ±0.35	X. XX: ±0.20
X. X: ±0.25	X. XXX: ±0.15
SCALE: As Shown	UNIT: mm
DRAW ZLA	DATE 10/05/2022
CHECK BobYang	DATE 10/05/2022

Antenk ANTENK ELECTRONICS CO., LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail: sales@antenk.com

TITLE: 1.50mm pitch ZPD Crimp Terminal
 Connector series

DRAWING NO: AT1504-xP

PRODUCT NO: AT1504-xP



3rd ANGLE PROJECTION

REV	DESCRIPTION	DATE
1		
2		
3		
4		
5		