
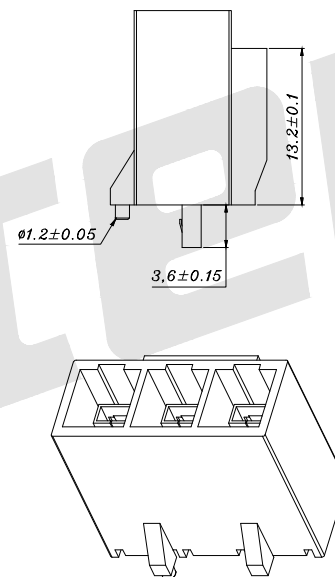
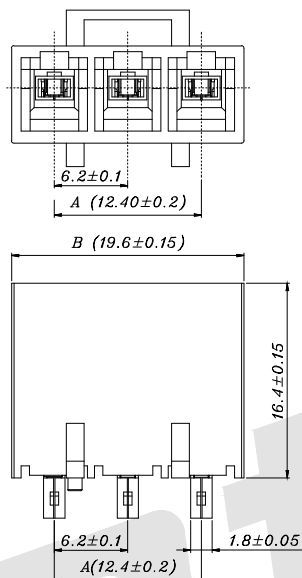
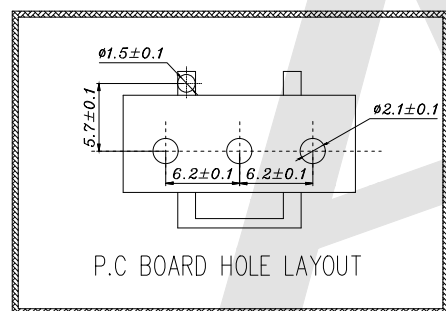


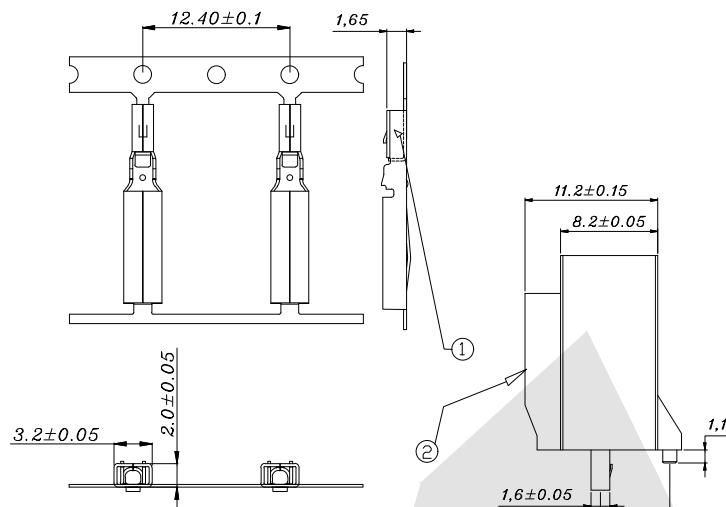

Circuits	A	B
02	6.2	13.4
03	12.4	19.6
04	6.2	13.4
04	18.6	28.2
06	12.4	19.6
08	18.6	28.2
12	31	38.6

PERFORMANCE:
 RATED VOLTAGE: 600V /AC/DC
 rated current: 16A~20A
 contact resistance $\leq 10\text{m}\Omega$
 insulation resistance : $\geq 1000\text{m}\Omega$
 high voltage: AC/2000V
 service temperature range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 salt spray test: 24H

Ordering Information:

AW6203V-3P

①

②

① Part No.

② Pin No.: 3

Unless Otherwise specified tolerance	
X±0.35	X.XX:±0.20
X.X:±0.25	X.XXX:±0.15

SCALE:	UNIT:
As Shown	mm

DRAW	DATE
ZLA	08/06/2022
CHECK	DATE
BobYang	08/06/2022



Antenk® ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: 6.20mm Pitch 180° Wafer Connector Series

DRAWING NO: AW6203V-3P

PRODUCT NO: AW6203V-3P

REV	DESCRIPTION				DATE
1	2	3	4	5	