

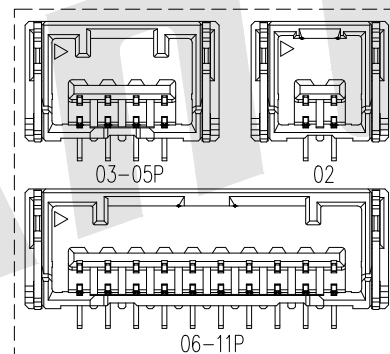



HSF

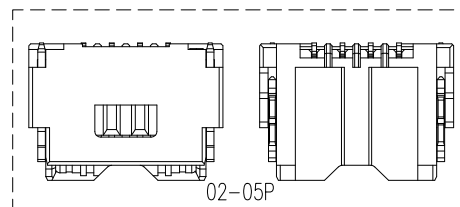

ROHS

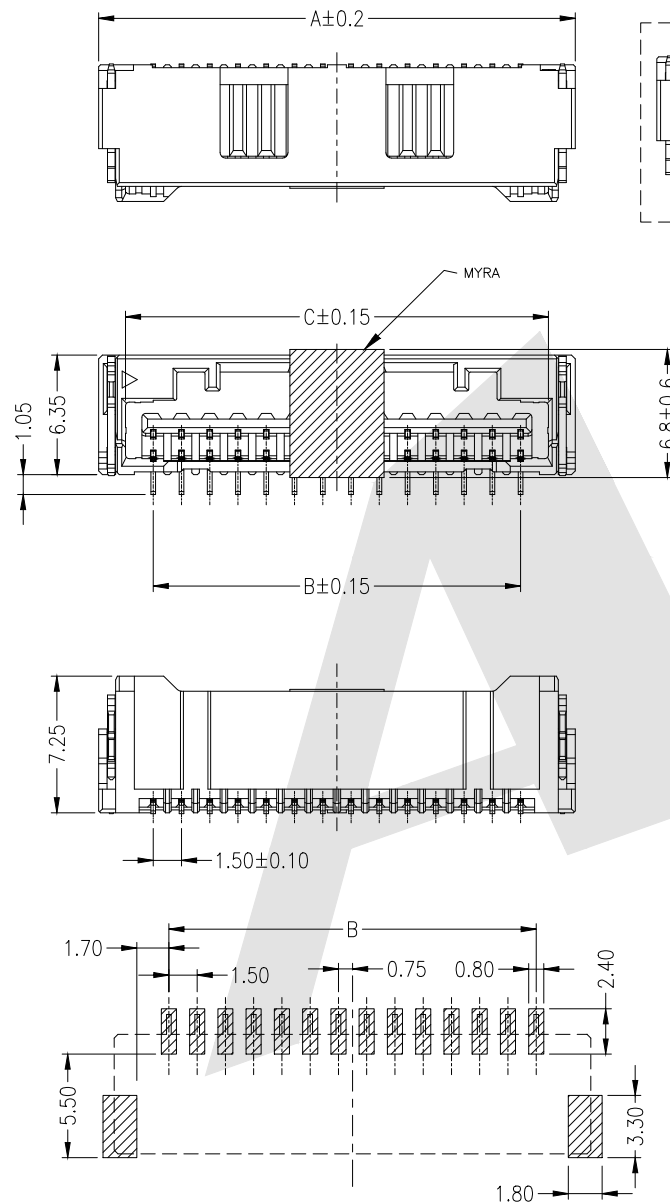

Specifications:

Contact resistance: $\leq 20m\Omega$
Insulation resistance: $\geq 500M\Omega$
Rated voltage: 100V AC DC
Rated current: 2.0A AC DC (AWG#24)
Withstand Voltage: 500V AC/minute
Temperature Range: $-40^{\circ}C \sim +105^{\circ}C$
Housing: LCP UL94V-0, Natural (Beige)
Contacts: Phosphor Bronze/Sn-plated
Solder Tabs: Brass/Sn-plated

Ordering Information:

AW1506VM-XP-XX

① ②

① Part No.

② Color:

(Blank)-White
BK-Black

DIM. POS.	A	B	C	DIM. POS.	A	B	C
2P	7.30	1.50	4.45	9P	17.80	12.00	14.95
3P	8.80	3.00	5.95	10P	19.30	13.50	16.45
4P	10.3	4.50	7.45	11P	20.80	15.00	17.95
5P	11.8	6.00	8.95	12P	22.30	16.50	19.45
6P	13.3	7.50	10.45	13P	23.80	18.00	20.95
7P	14.80	9.00	11.95	14P	25.30	19.50	22.45
8P	16.30	10.50	13.45	15P	26.80	21.00	23.95

Unless Otherwise specified tolerance

X.XX: ± 0.20
X.XXX: ± 0.15

SCALE:

As Shown

UNIT:

mm

DRAW

ZLA

DATE

09/20/2022

CHECK

BobYang

DATE

09/20/2022

VER.

A0



3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO., LTD

Http://www.antenk.com

E-mail: sales@antenk.com

TITLE:

1.5 Pitch Wafer 180° SMT

DRAWING NO: AW1506VM-XP-XX

PRODUCT NO: AW1506VM-XP-XX

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8