

HSF



RoHS

SPECIFICATION

Current Rating: 1.0Amp
Insulation Resistance: 1000MΩ min
Contact Resistance: 20MΩ max
Withstand Voltage: 500V AC/DC
Operating Temperature: -40°C to +105°C
Contact Material: Brass
Contact Plating: Au or Sn Over Ni
Insulator Material: PA6T+30%GF UL 94V-0

Ordering Code:

LHAR01 - X - X - X - X - X
① ② ③ ④ ⑤ ⑤

① Series No:

② No. of Contacts

10 14 16
20 24 26
30 34 40
44 50 60

③ Contact Plating:

G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN: Tin

④ Color Insulator



B:Black
U:Blue
G:Gray

⑤ Insulator Material



B:PA6T
C:LCP
E:PA9T

⑥ Packing

A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP

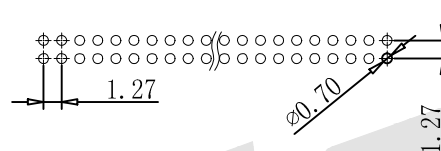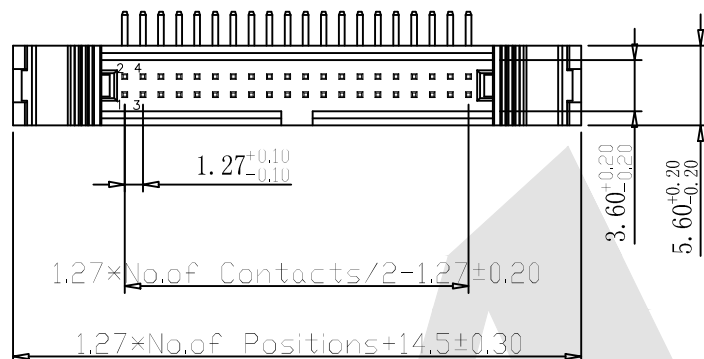

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ± 0.05)

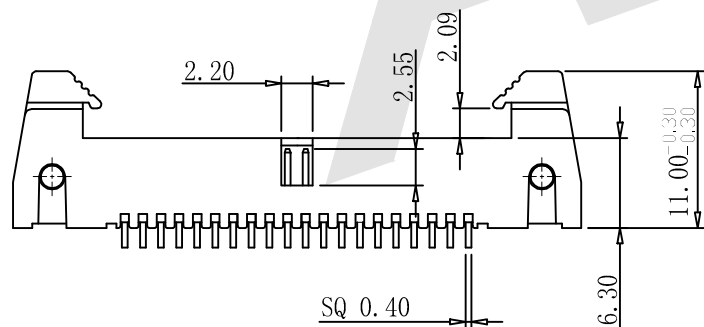

Unless Otherwise specified tolerance
X. ± 0.35 X.XX: ± 0.20
X.X: ± 0.25 X.XXX: ± 0.15

SCALE: As Shown UNIT: mm
DRAW YG ZHONG DATE 01/05/2016
CHECK BobYang DATE 01/05/2016



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:

1.27mm Ejector Header 90°

DRAWING NO:

LHAR01-XXXXX

PRODUCT NO:

LHAR01-XXXXX

REV

DESCRIPTION

DATE