

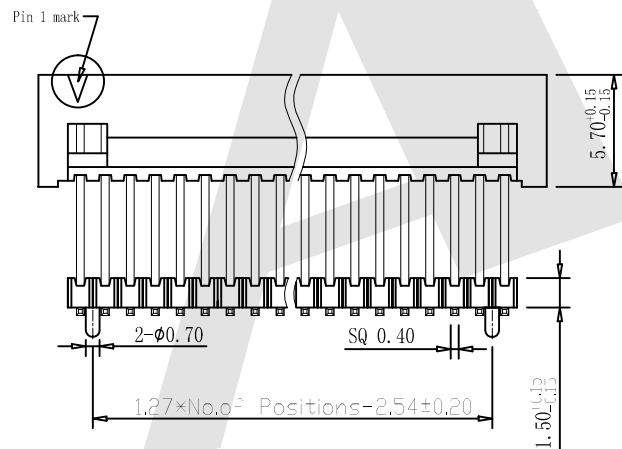
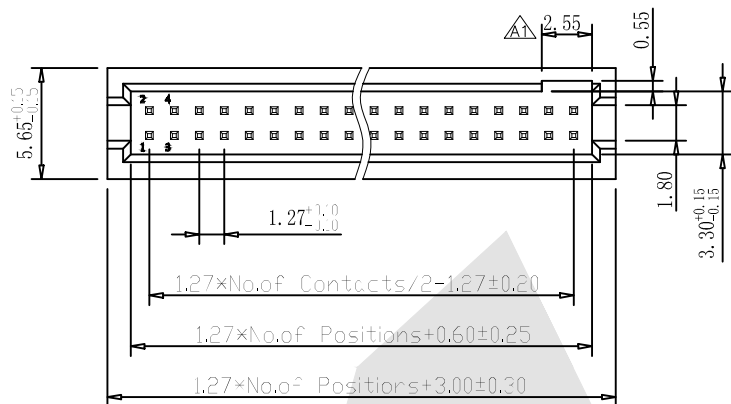
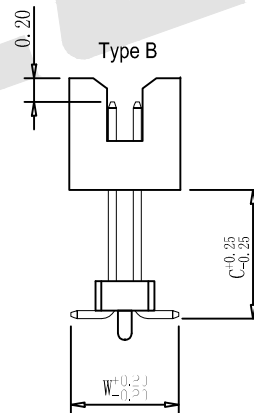


HSF

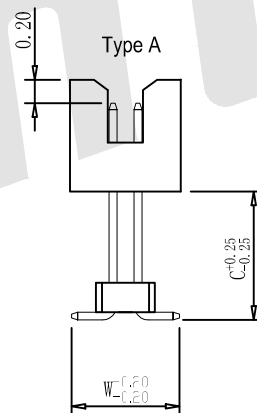

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

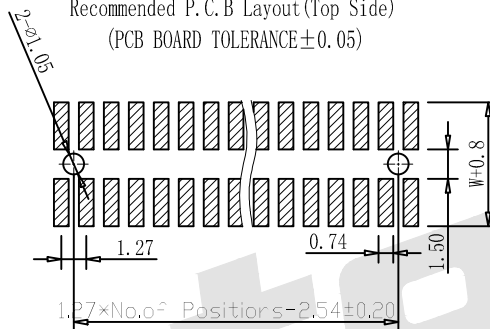

SPECIFICATION

Current Rating: 1Amp
Insulation Resistance: 1000MΩ min
Contact Resistance: 20MΩ max
Withstand Voltage: 500V AC/DC
Operating Temperature: -40°C to +105°C
Contact Material: Brass
Contact Plating: Au or Sn Over Ni
Insulator Material: PA6T+30%GF UL 94V-0

Ordering Code:

BHAM03 - X - X - X - X - X - X - W - C
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No:

② No. of Contacts
06 08 10 14 16
20 24 26 30 32
34 40 44 50 60
64 80 100

③ Contact Plating:

G0: Gold flash S0: Selective
G1: 3U" Gold S1: Selective 3u"
G2: 5u" Gold S2: Selective 5u"
G3: 10u" Gold S3: Selective 10u"
G4: 15u" Gold S4: Selective 15u"
G5: 30u" Gold S5: Selective 30u"
SN: Tin

④ Color Insulator

B: Black
U: Blue
W: White

⑤ Insulator Material

B: PA6T
C: LCP
E: PA9T

⑥ Packing

A: Tray
B: Bag
T: Tube
U: Tube+CAP
R: Tape&Reel
W: Tape&Reel+CAP
⑦ With locating pegs option
A: Type A without pegs
B: Type B with pegs

⑧ Dimension option:

W: 0550=5.50mm
C: 0438=4.38mm

Standard IE P/N :

BHAM03 -10-G0-B-B-B-0550-0438

Dimension antitheses List

ITEM	W	C
Standard	5.50	4.38
Alternate		

Unless Otherwise specified tolerance

X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE:

As Shown

UNIT:

mm

DRAW

YG ZHONG

DATE


01/05/2016

CHECK

BobYang

DATE

01/05/2016



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:

1.27mm Box Header SMT H=5.70 Add Housing

DRAWING NO:

BHAM03-XXXXXXXXXX

PRODUCT NO:

BHAM03-XXXXXXXXXX

REV DESCRIPTION

DATE