


DESCRIPTION

The KA3843 and KA3843A are fixed frequency current mode PWM controller. They are specially designed for OFF-Line and DC to DC converter applications with a minimal external components. Internally implemented circuits include a trimmed oscillator for precise duty cycle control, a temperature compensated reference, high gain error amplifier, current sensing comparator, and a high current totempole output ideally suited for driving a power MOSFET. Protection circuitry includes built undervoltage lockout and current limiting.

The corresponding thresholds for the The KA3843AM are 8.4V(on) and 7.6V (off)
The KA3843AM can operate within 100% duty cycle.

The KA3843AM has Start-Up Current 0.17mA (typ).


PIN CONNECTION (TOP VIEW)

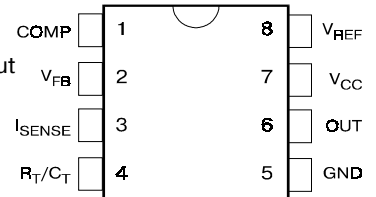

FEATURES

- Low Start-Up and Operating Current
- High Current Totem Pole Output
- Undervoltage Lockout With Hysteresis
- Operating Frequency Up To 500KHz

BLOCK DIAGRAM

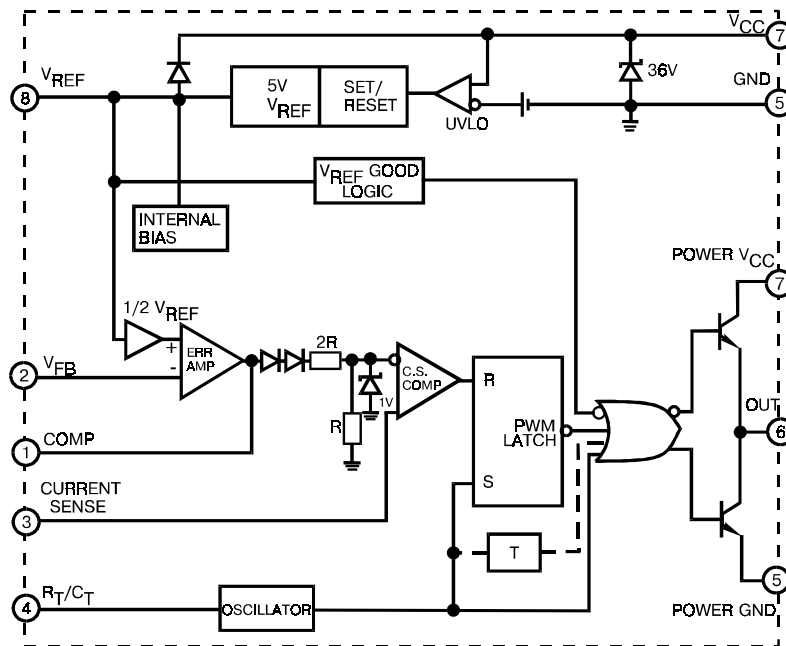

Absolute Maximum Ratings

Characteristic	Symbol	Value	Unit
Supply Voltage (low impedance source)	V _{CC}	30	V
Output Current	I _O	±1	A
Input Voltage (Analog Inputs pins 2,3)	V _I	-0.3 to 5.5	V
Error Amp Output Sink Current	I _{SINK (E.A.)}	10	mA
Power Dissipation (T _A =25°C)	P _O	1	W
Storage Temperature Range	T _{stg}	-65 to 150	°C
Lead Temperature (soldering 5 sec.)	T _L	260	°C

Current Mode PWM Controller

KA3843A(AM)

Electrical characteristics (*V_{CC}=15V, R_T=10kΩ, C_T=3.3nF, T_A=0°C to +70°C, unless otherwise specified)

Characteristics	Symbol	Test Condition		Min	Typ	Max	Unit
Reference Section							
Reference Output Voltage	V _{REF}	T _J = 25°C, I _{REF} = 1 mA		4.9	5.0	5.1	V
Line Regulation	ΔV _{REF}	12V ≤ V _{CC} ≤ 25 V			6.0	20	mV
Load Regulation	ΔV _{REF}	1 mA ≤ I _{REF} ≤ 20mA			6.0	25	
Short Circuit Output Current	I _{SC}	T _A = 25°C			-100	-180	mA
Oscillator Section							
Oscillation Frequency	f	T _J = 25°C	384XA	47	50	57	KHz
			384XAM	47	52	57	
Frequency Change with Voltage	Δf/ΔV _{CC}	12V ≤ V _{CC} ≤ 25 V			0.05	1.0	%
Oscillator Amplitude	V _(OSC)	(peak to peak)			1.6		V
Error Amplifier Section							
Input Bias Current	I _{BIAS}	V _{FB} =3V			-0.1	-2	μA
Input Voltage	V _{I(EA)}	V _{pin1} = 2.5V		2.42	2.5	2.58	V
Open Loop Voltage Gain	A _{VOL}	2V ≤ V ₀ ≤ 4V		65	90		dB
Power Supply Rejection Ratio	PSRR	12V ≤ V _{CC} ≤ 25 V		60	70		
Output Sink Current	I _{SINK}	V _{pin2} = 2.7V, V _{pin1} = 1.1V		2	7		mA
Output Source Current	I _{SOURCE}	V _{pin2} = 2.3V, V _{pin1} = 5V		-0.5	-1.0		mA
High Output Voltage	V _{OH}	V _{pin2} = 2.3V, R _L = 15KΩ to GND		5.0	6.0		V
Low Output Voltage	V _{OL}	V _{pin2} = 2.7V, R _L = 15KΩ to PIN 8			0.8	1.1	
Current Sense Section							
Gain	G _V	(Note 1 & 2)		2.85	3.0	3.15	V/V
Maximum Input Signal	V _{I(MAX)}	V _{pin1} = 5V (Note1)		0.9	1.0	1.1	V
Supply Voltage Rejection	SVR	12V ≤ V _{CC} ≤ 25 V (Note 1)			70		dB
Input Bias Current	I _{BIAS}	V _{pin3} = 3V			-3.0	-10	μA
Output Section							
Low Output Voltage	V _{OL}	I _{SINK} = 20 mA			0.08	0.4	V
		I _{SINK} = 200 mA			1.4	2.2	
High Output Voltage	V _{OH}	I _{SINK} = 20 mA		13	13.5		
		I _{SINK} = 200 mA		12	13.0		
Rise Time	t _R	T _J = 25°C, C _L = 1nF (Note 3)			45	150	nS
Fall Time	t _F	T _J = 25°C, C _L = 1nF (Note 3)			35	150	
Undervoltage Lockout Section							
Start Theshold	V _{TH(ST)}						V
		3843A(AM)		7.8	8.4	9.0	
Min. Operating Voltage (After Turn On)	V _{OPR(min)}						V
		3843A(AM)/45A(AM)		7.0	7.6	8.2	
PWM Section							
Max. Duty Cycle	D _(MAX)	3842A(AM)/43A(AM)		95	97	100	%
Min. Duty Cycle	D _(MAX)					0	
Total Standby Current							
Start-Up Current	I _{ST}	384XA(AM)			0.17	0.3	mA
Operating Supply Current	I _{CC (OPR)}	V _{pin3} = V _{pin2} = 0V			13	17	
Zener Voltage	V _Z	I _{CC} =25 mA		30	38		V

* Adjust V_{CC} above the start threshold before setting it to 15V.

Note 1: Parameter measured at trip point of latch with V_{pin2}=0.

Note 2: Gain defined as A=ΔV_{pin1}/ΔV_{pin3} ; 0 ≤ V_{pin3} ≤ 0.8V.

Note 3: These parameters, although guaranteed, are not 100% tested in production.

PIN FUNCTION

N	FUNCTION	DESCRIPTION
1	COMP	This pin is the Error Amplifier output and is made for loop compensation.
2	V _{FB}	This is the inverting input of the Error Amplifier. It is normally connected to the switching power supply output through a resistor divider.
3	I _{SENSE}	A voltage proportional to inductor current is connected to this input. The PWM uses this information to terminate the output switch conduction.
4	R _T /C _T	The oscillator frequency and maximum Output duty cycle are programmed by connecting resistor R _T to V _{ref} and capacitor C _T to ground.
5	GROUND	This pin is the combined control circuitry and power ground.
6	OUTPUT	This output directly drives the gate of a power MOSFET. Peak currents up to 1A are sourced and sink by this pin.
7	V _{CC}	This pin is the positive supply of the integrated circuit.
8	V _{ref}	This is the reference output. It provides charging current for capacitor C _T through resistor R _T .

APPLICATION INFORMATION

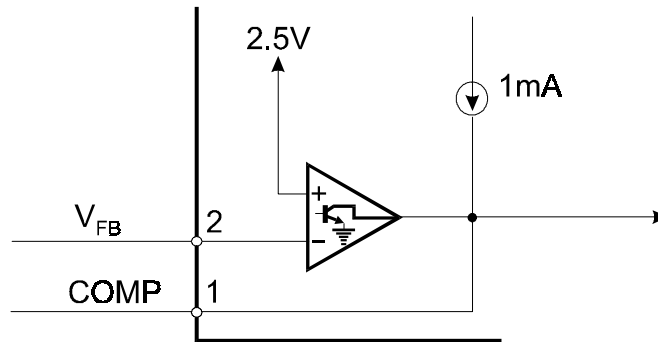


Figure 1. Error Amp Configuration



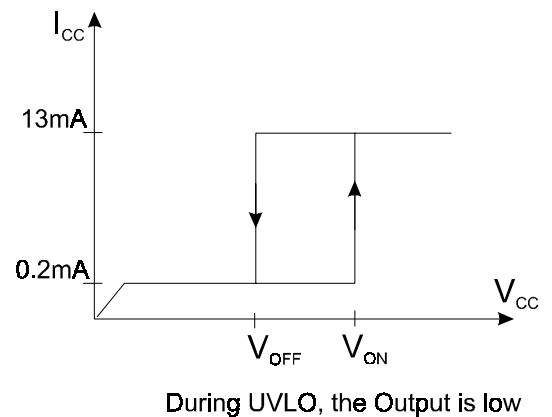


Figure 2. Undervoltage Lockout

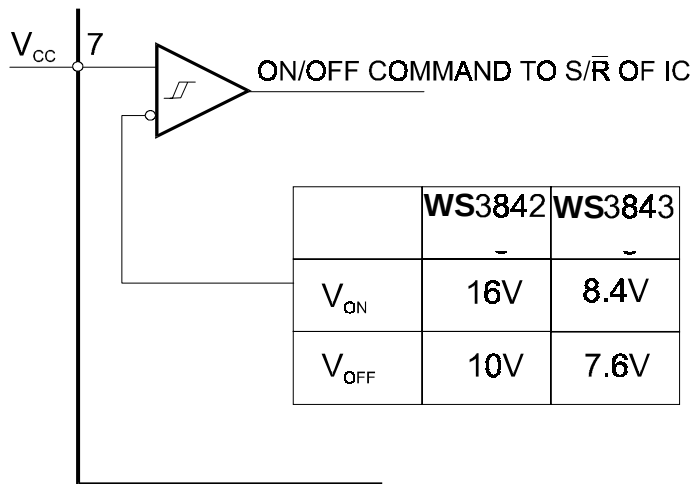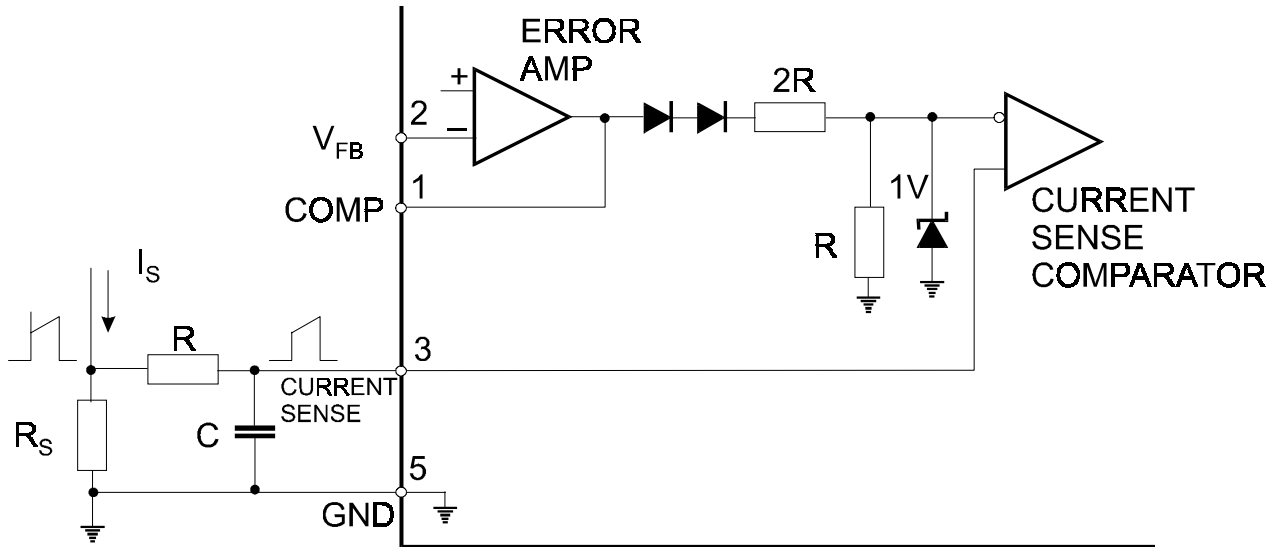

Peak current is determined by $I_{S \max} \approx \frac{1.0V}{R_S}$

Figure 3. Current Sense Circuit



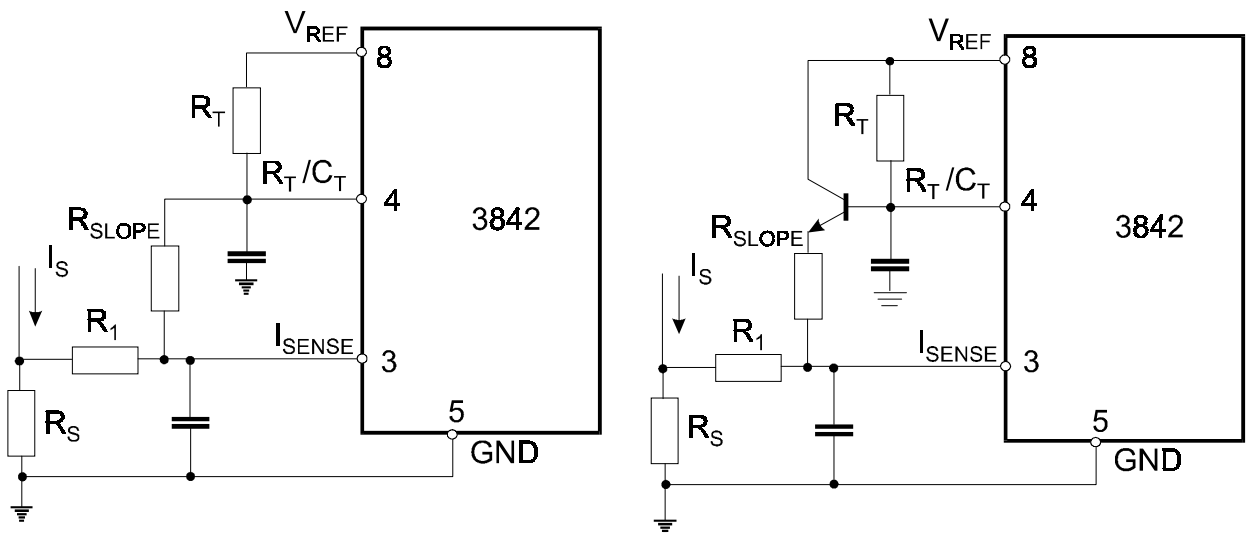


Figure 4. Slope Compensation Techniques

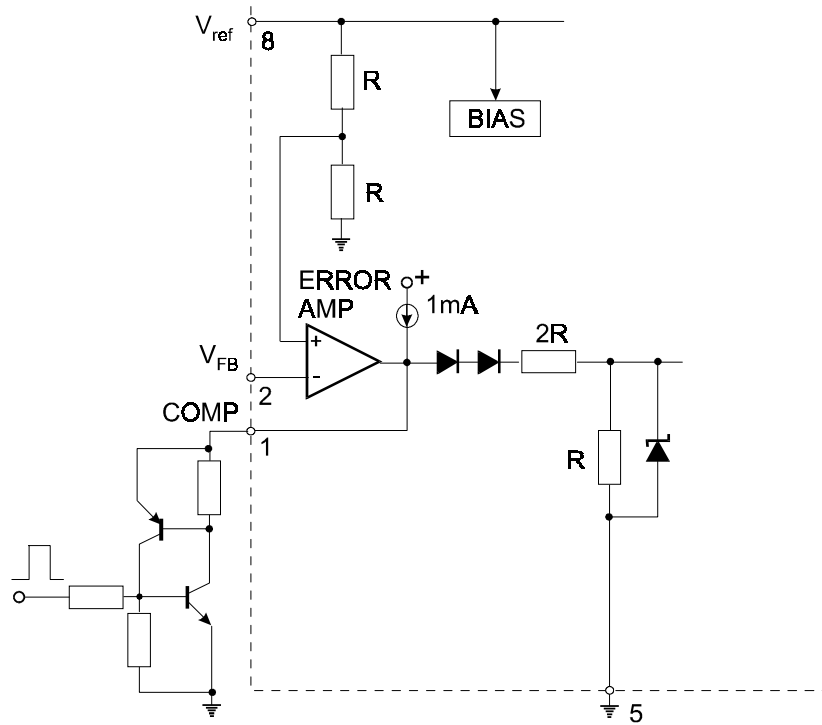


SCR must be selected for a holding current of less than 0.5mA.
The simple two transistor circuit can be used in place of the SCR as shown.

Figure 5. Latched Shutdown

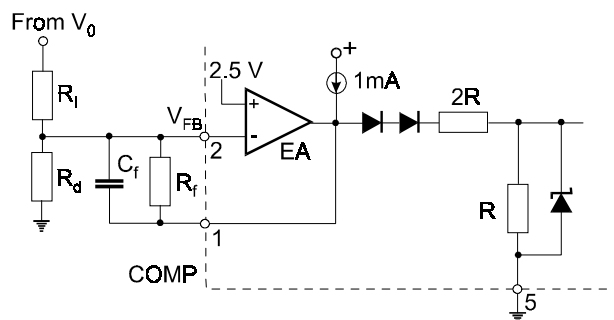

Error Amp compensation circuit for stabilizing any current-mode topology except for boost and flyback converters operating with continuous inductor current.

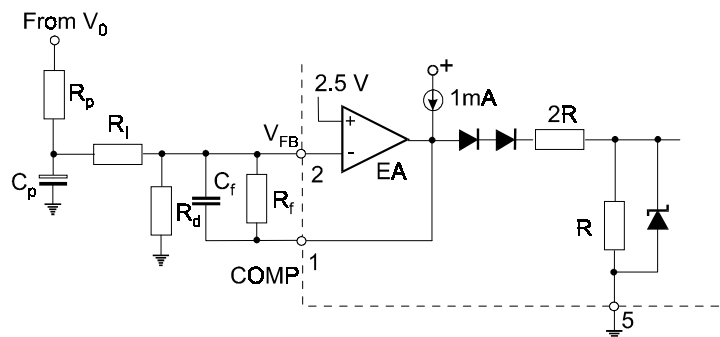

Error Amp compensation circuit for stabilizing current-mode boost and flyback topologies operating with continuous inductor current.

Figure 6. Error Amplifier Compensation

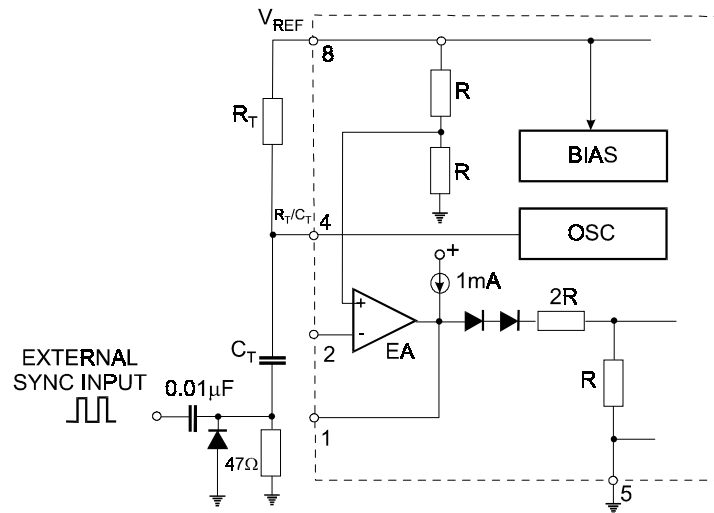


Figure 7. External Clock Synchronization

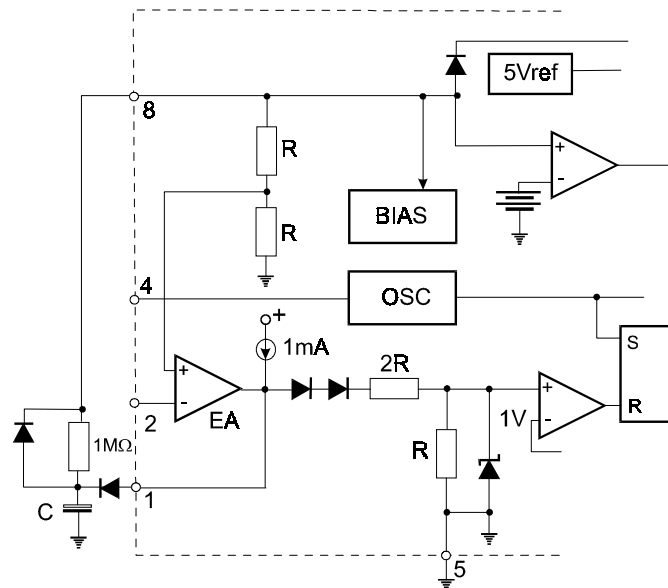


Figure 8. Soft-Start Circuit

TYPICAL PERFORMANCE CHARACTERISTICS

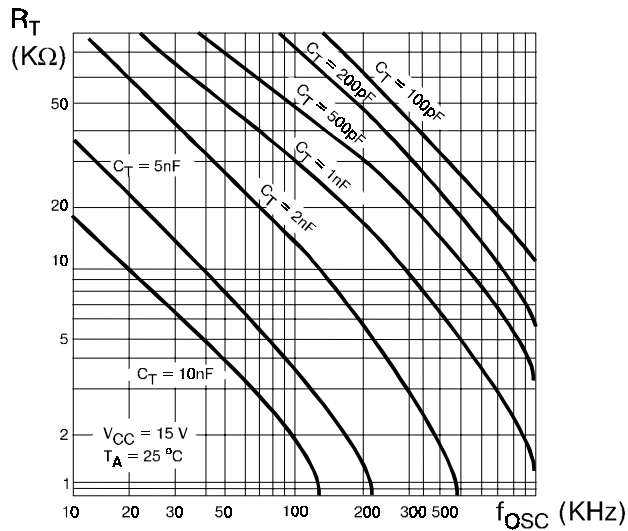


Figure 1. Timing Resistor vs. Oscillator Frequency

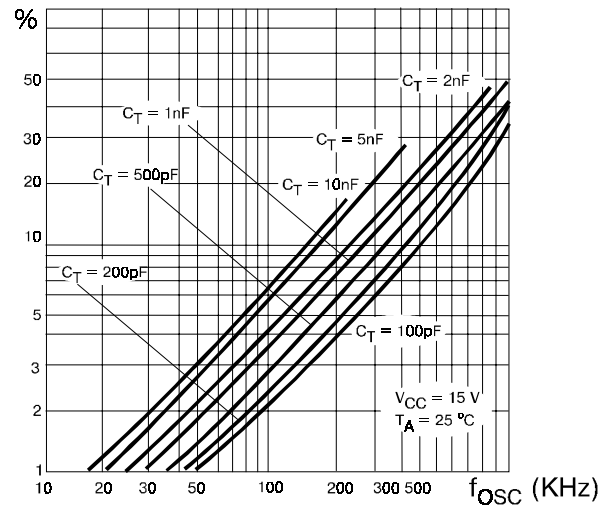


Figure 2. Output Dead-Time vs. Oscillator Frequency

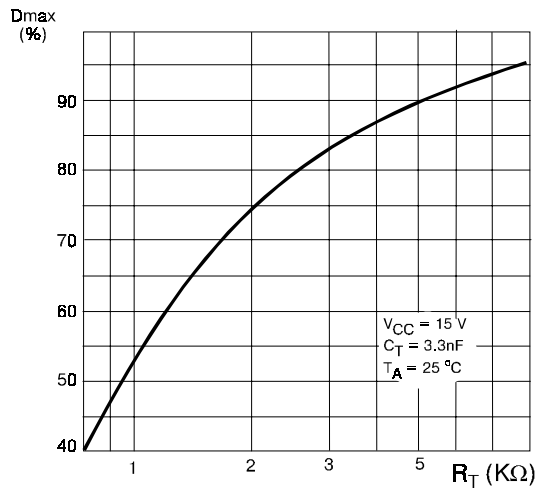


Figure 3. Maximum Output Duty Cycle vs. Timing Resistor (3842/43)

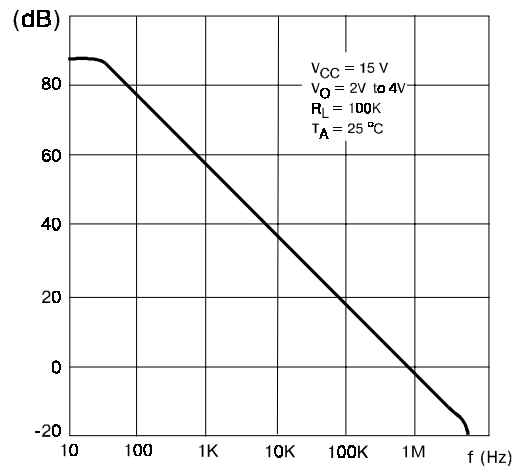


Figure 4. Error Amp Open-Loop Gain vs. Frequency

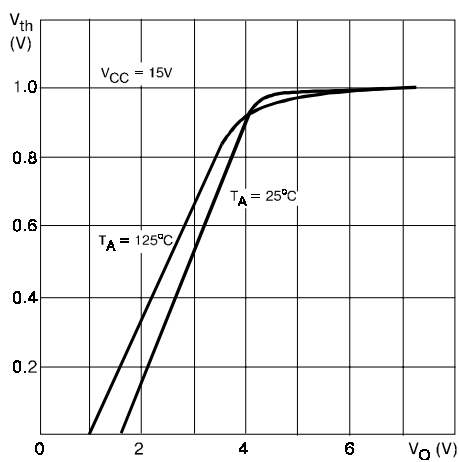


Figure 5. Current Sense Input Threshold vs. Error Amp Output Voltage

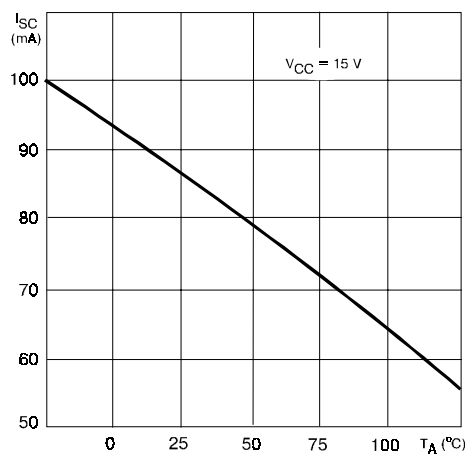


Figure 6. Reference Short Circuit Current vs. Temperature

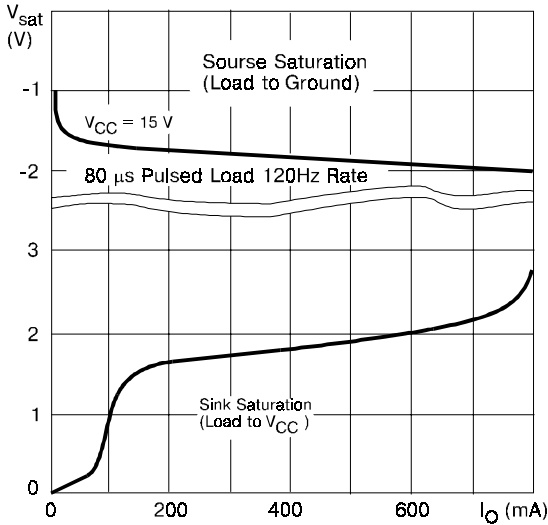


Figure 7. Output Saturation Voltage vs. Load Current
 $T_A = 25^{\circ}C$

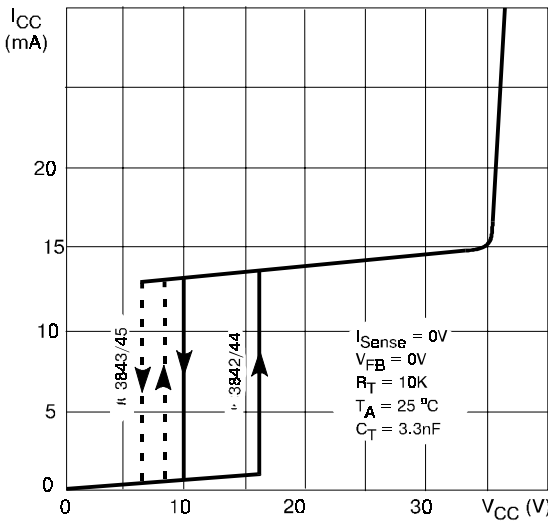


Figure 8. Supply Current vs. Supply Voltage


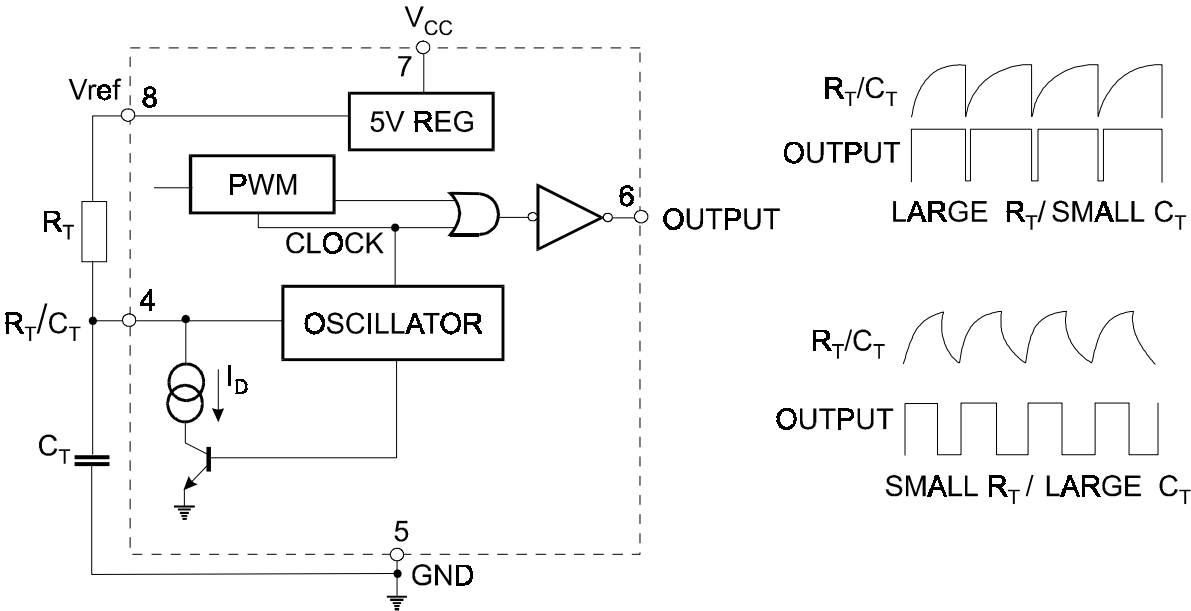


Figure 9. Oscillator and Output Waveforms

PAD LOCATION

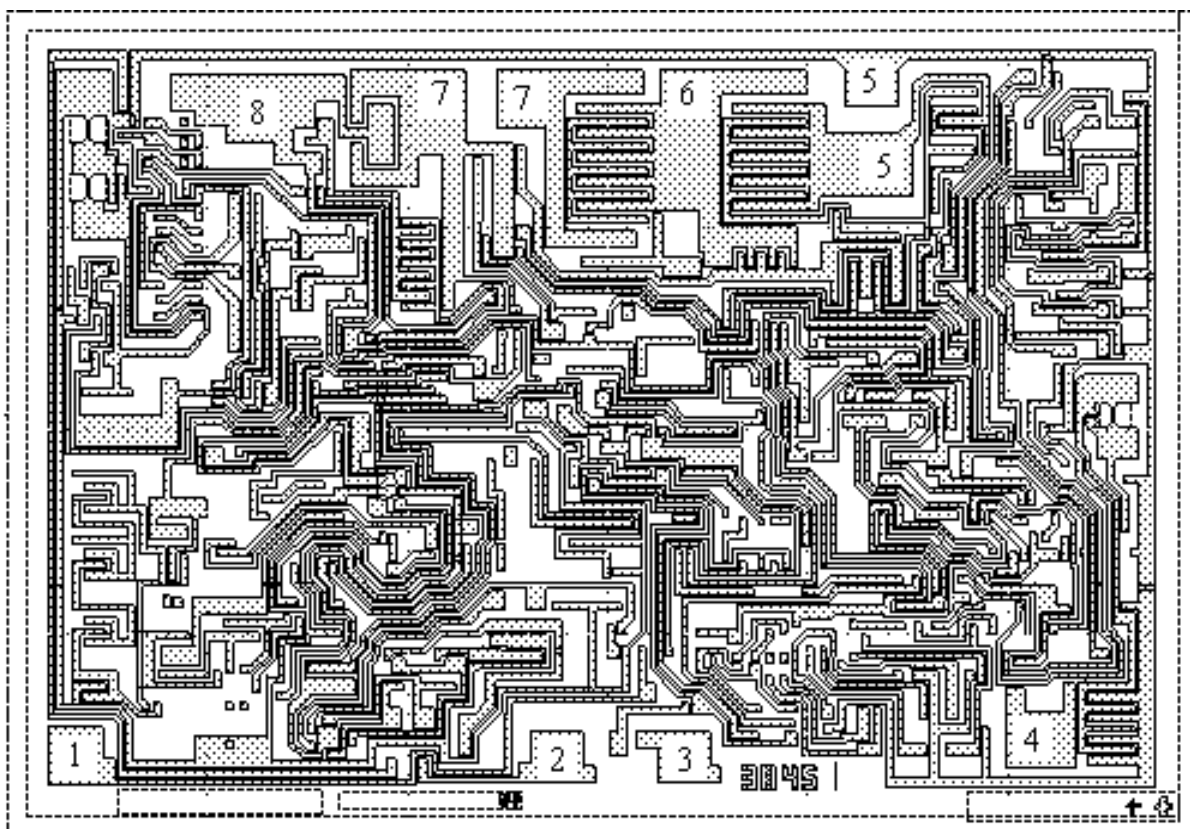

Chip size: 2.38 x 1.63 mm

Pad N	Pad Name	Coordinates μm	
		X	Y
1	COMP	90	110
2	V_{FB}	1050	110
3	I_{SENSE}	1310	110
4	R_T/C_T	2000	150
5	POWER GND	1700	1280
6	GND	1680	1450
7	OUT	1310	1410
8	POWER V_{CC}	990	1410
9	V_{CC}	815	1410
10	V_{REF}	460	1390