


SPECIFICATION

Current Rating:	2.0 Amp
Insulation Resistance:	1000MΩ min
Contact Resistance:	20MΩ max
Withstand Voltage:	500V AC/DC
Operating Temperature:	-40°C to +105°C
Contact Material:	Brass
Contact Plating:	Au or Sn Over Ni
Insulator Material:	PA6T+30%GF UL 94V-0

Ordering Code:

BHCM01 - X - X - X - X - X
 ① ② ③ ④ ⑤ ⑥

- | | |
|--------------------------------|----------------------|
| ① Series No: | ④ Color Insulator |
| ② No. of Contacts | B:Black |
| 06 08 10 12 14 16 18 | U:Blue |
| 20 22 24 26 28 30 34 | W:White |
| 36 40 44 50 60 68 | ⑤ Insulator Material |
| | B:PA6T |
| | C:LCP |
| | E:PA9T |
| ③ Contact Plating: | ⑥ Packing |
| G0:Gold flash S0:Selective | A:Tray |
| G1:3U" Gold S1:Selective 3u" | B:Bag |
| G2:5u" Gold S2:Selective 5u" | T:Tube |
| G3:10u" Gold S3:Selective 10u" | U:Tube+CAP |
| G4:15u" Gold S4:Selective 15u" | R:Tape&Reel |
| G5:30u" Gold S5:Selective 30u" | W:Tape&Reel+CAP |
| SN:Tin | |

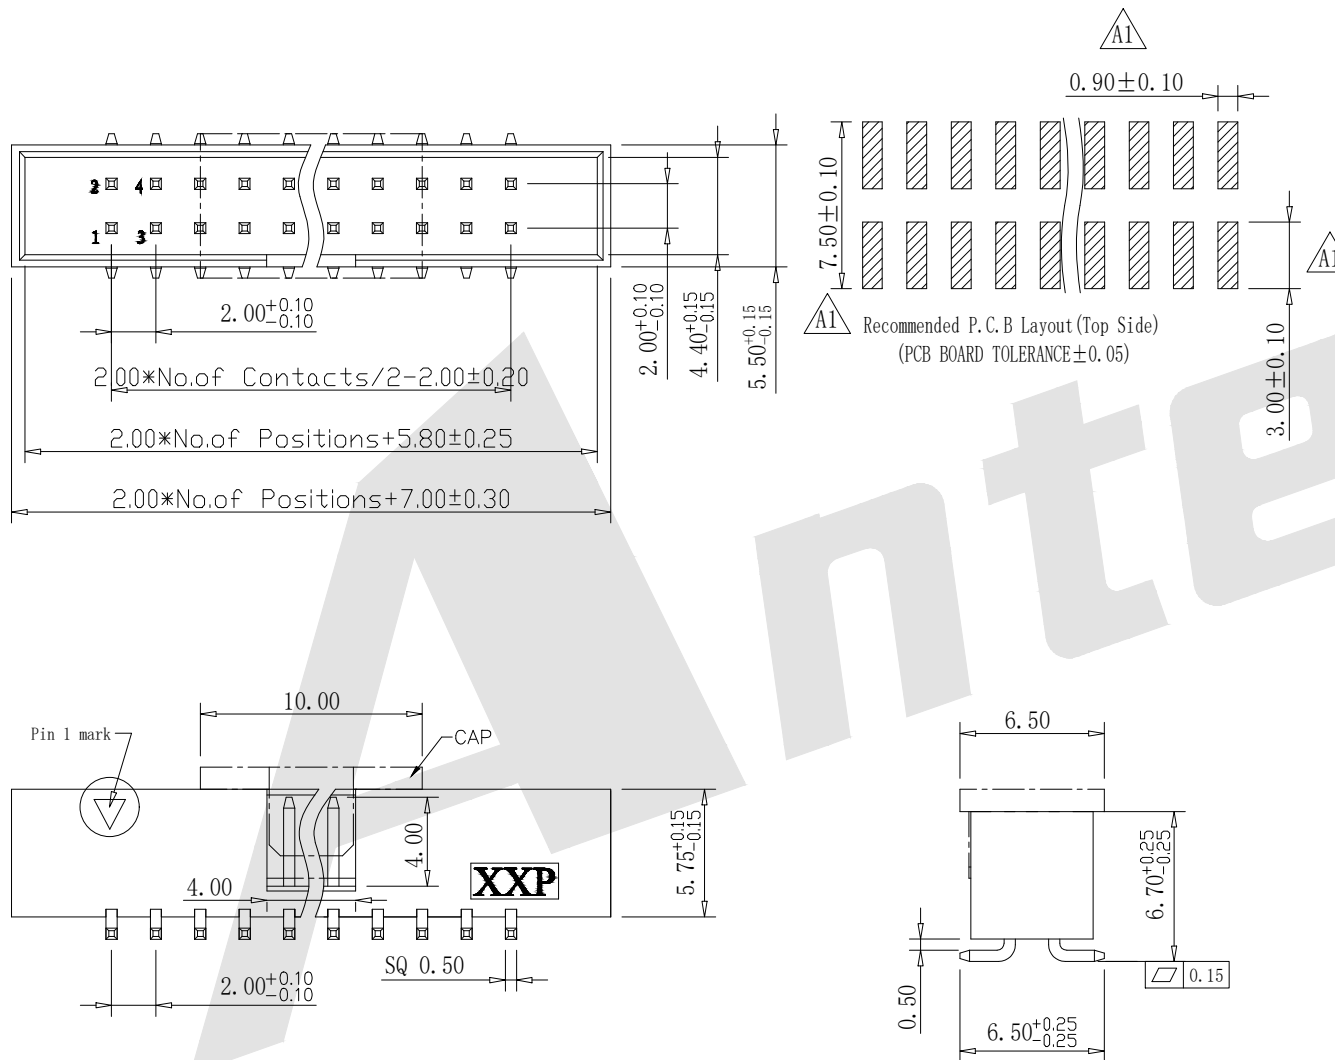


Unless Otherwise specified tolerance

X. ±0.35 X.XX: ±0.20
 X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm

DRAW YG ZHONG DATE 01/05/2016

CHECK BobYang DATE 01/05/2016



Antenk ANTENK ELECTRONICS CO., LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail:sales@antenk.com

TITLE: 2.00mm Box Header SMT H=5.75

DRAWING NO: BHCM01-XXXXX

PRODUCT NO: BHCM01-XXXXX

Add dimensions
 DESCRIPTION

07/18/2023
 DATE

REV