

VI-J00

MiniMod

DC-DC Converters

25 to 100 Watts

Converter Selection Chart

VI-J    

Features

- Up to 50W/Cubic Inch
- UL, CSA, TÜV, VDE, BABT
- CE Marked
- Up to 90% Efficiency
- Size: 2.28" x 2.4" x 0.5" (57,9 x 61,0 x 12,7)
- Remote Sense and Current Limit
- Logic Disable
- Wide Range Output Adjust
- ZCS Power Architecture
- Low Noise FM Control

Product Highlights

The VI-J00 MiniMod family establishes a new standard in component-level DC-DC converters. This "junior" size complement to the higher power VI-200 family offers up to 100W of isolated and regulated power in a board mounted package. At one-half the size and twice the power density of previous 100W modules, and with a maximum operating temperature rating of 100°C, the MiniMod opens new horizons for board-mounted (distributed) power architectures.

Utilizing Vicor's "zero-current-switching" forward converter technology, proven by an installed base of over 8 million units, the MiniMod family combines state of the art power density with the efficiency, low noise and reliability required by next generation power systems.

Packaging Options

SlimMods™, high power density, flangeless packages and FinMods™, featuring integral finned heatsinks.

SlimMod: Option suffix: - S

Example: VI - JXX - XX - S

FinMod: Option suffix: - F1 and - F2

Examples:

VI - JXX - XX - F1, 0.75" height

VI - JXX - XX - F2, 1.00" height

Input Voltage				Output Voltage			
Nominal	Range	Brownout/Transient*		Z =	2V	2 =	15V
0 = 12V	10 - 20V(5)	n/a	22V	Y =	3.3V	N =	18.5V
1 = 24V	21 - 32V(2)	18V	36V	0 =	5V	3 =	24V
W = 24V	18 - 36V(2)	n/a	n/a	X =	5.2V	L =	28V
2 = 36V	21 - 56V(6)	18V	60V	W =	5.5V	J =	36V
3 = 48V	42 - 60V(3)	36V	72V	V =	5.8V	K =	40V
N = 48V	36 - 76V(2)	n/a	n/a	T =	6.5V	4 =	48V
4 = 72V	55 - 100V(2)	45V	110V	R =	7.5V	H =	52V
T = 110V	66 - 160V(2)	n/a	n/a	M =	10V	F =	72V
5 = 150V	100 - 200V(2)	85V	215V	1 =	12V	D =	85V
6 = 300V	200 - 400V(3)	170V	425V	P =	13.8V	B =	95V
7 = 150/300V	100 - 375V(6)	90V	n/a				


Product Grade/Operating Temp.		Product Grade/Storage Temp.		Output Power/Current	
E = -10°C to +100°C	E = -20°C to +105°C	C = -25°C to +100°C	C = -40°C to +105°C	V _{OUT} ≥ 5V	V _{OUT} < 5V
I = -40°C to +100°C	I = -55°C to +105°C	M = -55°C to +100°C	M = -65°C to +105°C	Z = 25W	Z = 5A
				Y = 50W	Y = 10A
				X = 75W	X = 15A
				W = 100W	W = 20A

Max. Output For	5V Outputs	> 5V Outputs	< 5V Outputs
(1)	50W	50W	10A
(2)	75W	100W	20A
(3)	100W	100W	20A


Max. Output For	5V Outputs	> 5V Outputs	< 5V Outputs
(4)	75W	75W	15A
(5)	50W	75W	15A
(6)	50W	75W	10A

*Brownout 75% of rated load; transient voltage for 1 second.

Mechanical Drawing

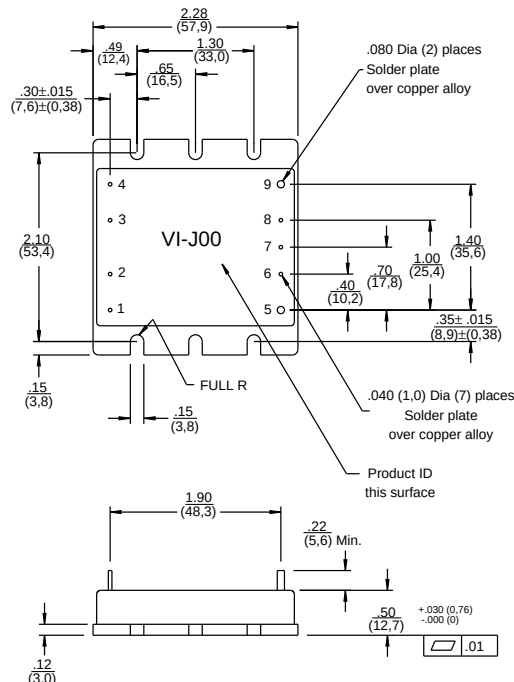

Pin #	Function
1	+In
2	Gate In
3	Gate Out
4	-In
5	+Out
6	+Sense
7	Trim
8	-Sense
9	-Out



Converter Specifications

(typical at T_{BP} = 25°C, nominal line and 75% load, unless otherwise specified)

PARAMETER	VI-J00 E-Grade			VI-J00 C-, I-, M-Grade			UNITS	TEST CONDITIONS
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.		
■ Input Characteristics								
Inrush charge		60x10 ⁻⁶		60x10 ⁻⁶	100x10 ⁻⁶		Coulombs	Nominal line
Input reflected ripple current – pp		10%		10%			I _{IN}	Nominal line, full load
Input ripple rejection	25+20Log $\left(\frac{V_{in}}{V_{out}}\right)$			30+20Log $\left(\frac{V_{in}}{V_{out}}\right)$			dB	120 Hz, nominal line
				20+20Log $\left(\frac{V_{in}}{V_{out}}\right)$			dB	2400 Hz, nominal line
No load power dissipation	1.35		2	1.35		2	Watts	
■ Output Characteristics								
Setpoint accuracy		1.0%	2.0%		0.5%	1.0%	V _{NOM}	
Load/line regulation			0.5%		0.05%	0.2%	V _{NOM}	LL to HL, 10% to Full Load
Load/line regulation			1.0%		0.2%	0.5%	V _{NOM}	LL to HL, No Load to 10%
Output temperature drift		0.02			0.01	0.02	%/°C	Over rated temperature
Long term drift		0.02			0.02		%/1K hours	
Output ripple - pp:								
2V, 3.3V		200			100	150	mV	20 MHz bandwidth
5V		5%			2%	3%		20 MHz bandwidth
10-48V		3%			0.75%	1.5%		20 MHz bandwidth
Trim range ¹	50%		110%	50%		110%	V _{NOM}	
Total remote sense compensation	0.5			0.5			Volts	0.25V max. neg. leg
Current limit	105%		135%	105%		125%	I _{NOM}	Automatic restart
Short circuit current	105%		140%	105%		130%	I _{NOM}	
■ Control Pin Characteristics								
Gate out impedance		50			50		Ohms	
Gate in impedance		10 ³			10 ³		Ohms	
Gate in high threshold		6				6	Volts	Use open collector
Gate in low threshold	0.65			0.65			Volts	
Gate in low current			6			6	mA	
■ Dielectric Withstand Characteristics								
Input to output	3,000			3,000			V _{RMS}	Baseplate earthed
Output to baseplate	500			500			V _{RMS}	
Input to baseplate	1,500			1,500			V _{RMS}	
■ Thermal Characteristics								
Efficiency		78-88%			80-90%			
Baseplate to sink		0.4			0.4		°C/Watt	With Vicor P/N 04308
■ Mechanical Specifications								
Weight		3.0 (85)			3.0 (85)		Ounces (Grams)	

¹10V, 12V and 15V outputs, standard trim range ±10%. Consult factory for wider trim range.

For product compliance with agency standards please refer to pages 67 - 69.



扫一扫上面的二维码图案，加我为朋友。

For the latest Vicor Product Information: www.vicorpower.com