


FEATURES

- Epitaxial planar die construction
- Complementary NPN Type available

Marking: 2F











SOT-323

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)




Parameter	Symbol	Value	Unit
Collector Base Voltage	$-V_{CBO}$	60	V
Collector Emitter Voltage	$-V_{CEO}$	60	V
Emitter Base Voltage	$-V_{EBO}$	5	V
Collector Current	$-I_C$	600	mA
Power Dissipation	P_{tot}	350	mW
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 55 to + 150	$^\circ\text{C}$

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Max.	Unit
DC Current Gain at $-I_C = 0.1\text{ mA}$, $-V_{CE} = 10\text{ V}$ at $-I_C = 1\text{ mA}$, $-V_{CE} = 10\text{ V}$ at $-I_C = 10\text{ mA}$, $-V_{CE} = 10\text{ V}$ at $-I_C = 150\text{ mA}$, $-V_{CE} = 10\text{ V}$ at $-I_C = 500\text{ mA}$, $-V_{CE} = 10\text{ V}$	h_{FE}	75 100 100 100 50	- - - 300 -	- - - - -
Collector Base Cutoff Current at $-V_{CB} = 50\text{ V}$	$-I_{CBO}$	-	10	nA
Collector Base Breakdown Voltage at $-I_C = 10\text{ }\mu\text{A}$	$-V_{(BR)CBO}$	60	-	V
Collector Emitter Breakdown Voltage at $-I_C = 10\text{ mA}$	$-V_{(BR)CEO}$	60	-	V
Emitter Base Breakdown Voltage at $-I_E = 10\text{ }\mu\text{A}$	$-V_{(BR)EBO}$	5	-	V
Collector Saturation Voltage at $-I_C = 150\text{ mA}$, $-I_B = 15\text{ mA}$ at $-I_C = 500\text{ mA}$, $-I_B = 50\text{ mA}$	$-V_{CE(sat)}$ $-V_{CE(sat)}$	- -	0.4 1.6	V V
Base Saturation Voltage at $-I_C = 150\text{ mA}$, $-I_B = 15\text{ mA}$ at $-I_C = 500\text{ mA}$, $-I_B = 50\text{ mA}$	$-V_{BE(sat)}$ $-V_{BE(sat)}$	- -	1.3 2.6	V V
Gain Bandwidth Product at $-I_C = 50\text{ mA}$, $-V_{CE} = 20\text{ V}$, $f = 100\text{ MHz}$	f_T	200	-	MHz
Collector Output Capacitance at $-V_{CB} = 10\text{ V}$, $f = 1\text{ MHz}$	C_{ob}	-	8	pF
Turn-on Time at $-V_{CC} = 30\text{ V}$, $-I_C = 150\text{ mA}$, $-I_{B1} = 15\text{ mA}$	t_{on}	-	45	ns
Delay Time at $-V_{CC} = 30\text{ V}$, $-I_C = 150\text{ mA}$, $-I_{B1} = 15\text{ mA}$	t_d	-	10	ns
Rise Time at $-V_{CC} = 30\text{ V}$, $-I_C = 150\text{ mA}$, $-I_{B1} = 15\text{ mA}$	t_r	-	40	ns
Turn-off Time at $-V_{CC} = 6\text{ V}$, $-I_C = 150\text{ mA}$, $-I_{B1} = -I_{B2} = 15\text{ mA}$	t_{off}	-	100	ns
Storage Time at $-V_{CC} = 6\text{ V}$, $-I_C = 150\text{ mA}$, $-I_{B1} = -I_{B2} = 15\text{ mA}$	t_s	-	80	ns
Fall Time at $-V_{CC} = 6\text{ V}$, $-I_C = 150\text{ mA}$, $-I_{B1} = -I_{B2} = 15\text{ mA}$	t_f	-	30	ns

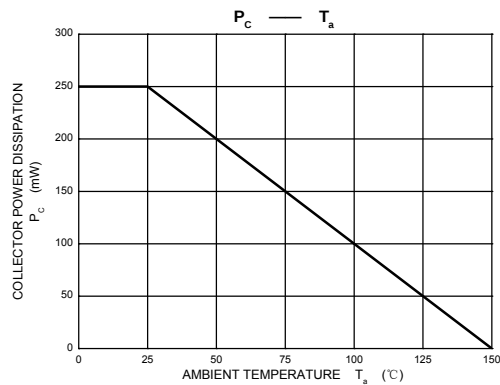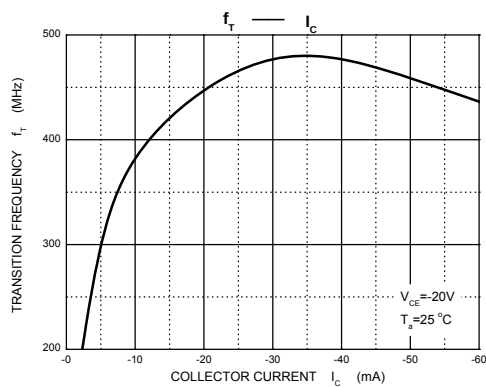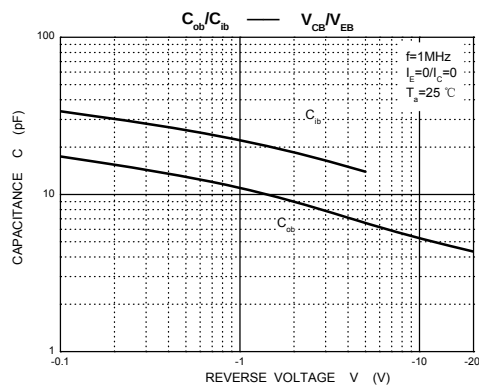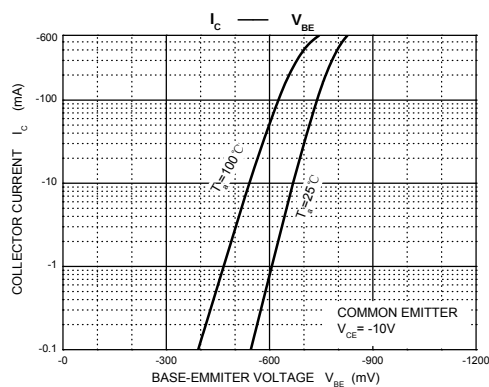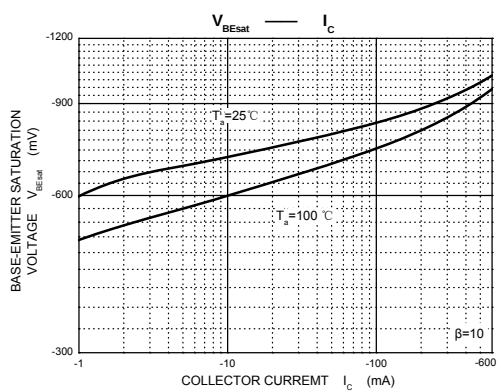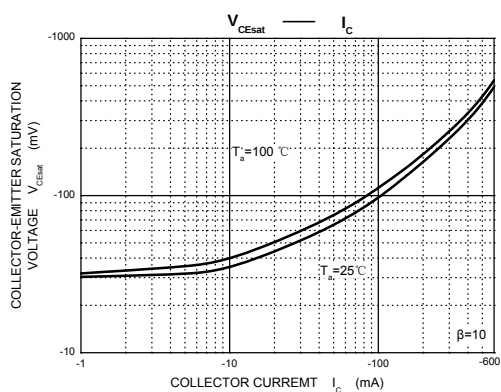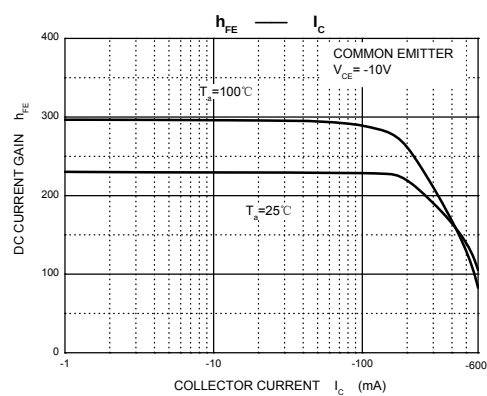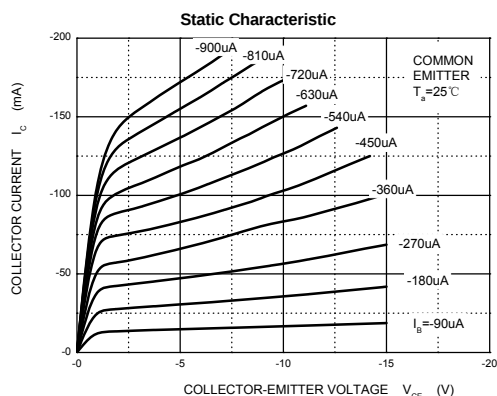

SOT-323 Package Outline Dimensions

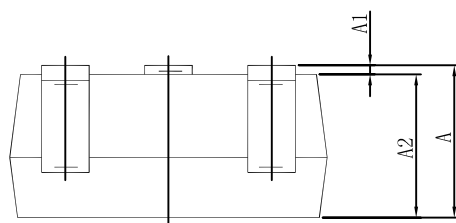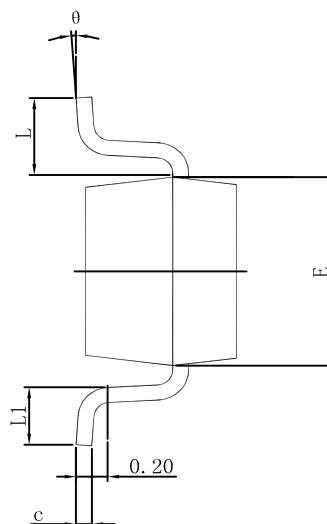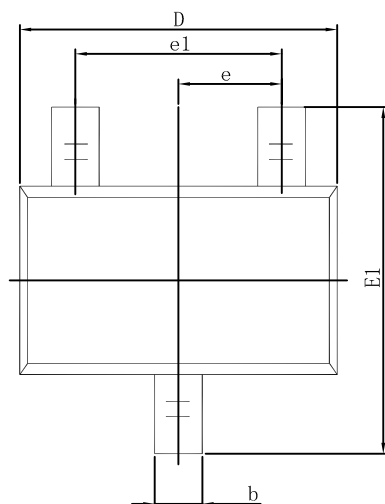

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.200	0.400	0.008	0.016
c	0.080	0.150	0.003	0.006
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	2.150	2.450	0.085	0.096
e	0.650 TYP.		0.026 TYP.	
e1	1.200	1.400	0.047	0.055
L	0.525 REF.		0.021 REF.	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°