


MB05F THRU MB10F

SINGLE PHASE 0.8AMP GLASS PASSIVATED BRIDGE RECTIFIERS
VOLTAGE RANGE 50 TO 1000 VOLTS

MBF

FEATURES

- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique results in inexpensive product
- Rating to 1000V PRV
- High surge current capability
- Small size simple installation

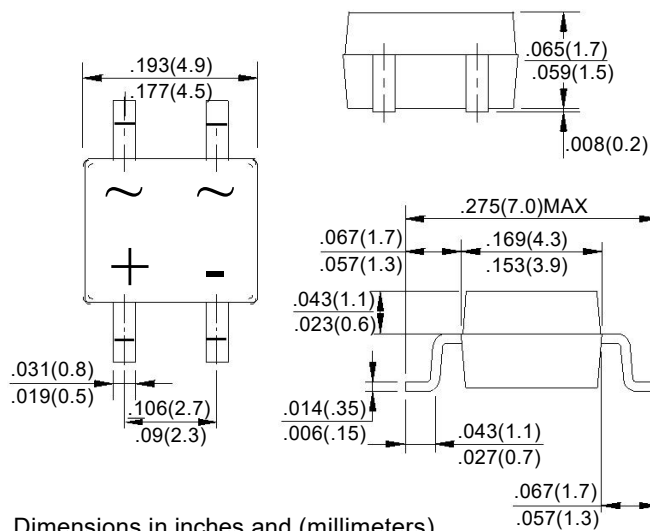

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave ,60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number		MB05F	MB1F	MB2F	MB4F	MB6F	MB8S	MB10F	Units
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @T _A =40 °C	I(AV)	0.8							A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load(JEDEC Method)	I(FSM)	35							A
Peak Forward Voltage at 0.8A DC	V _F	1.0							V
Maximum DC Reverse Current @T _J =25°C	I _R	5.0							µA
at Rated DC Bolcking Voltage @ T _J =100°C		500							
Tyical Junction Capacitance	C _J	15							pF
Tyical Thermal Resistance	RθJC	75							°C/W
Operating Temperature Range	T _J	-55 to +150							°C
Storage Temperature Range	T _{STG}	-55 to +150							°C

MB05F THRU MB10F

RATING AND CHARACTERISTIC CURVES

FIG.1 - DERATING CURVE OUTPUT RECTIFIED CURRENT FOR

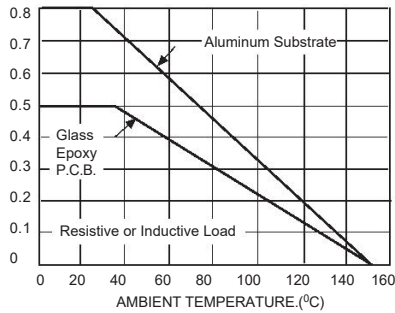


FIG.3 - TYPICAL FORWARD VOLTAGE CHARACTERISTICS PER LEG




FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG




FIG.4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS PER LEG

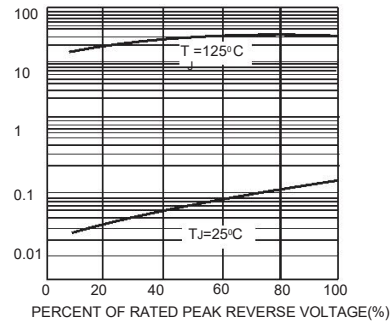


FIG.5-TYPICAL JUNCTION CAPACITANCE

