

1 产品特点





- 符合IEEE802.3 和ANSIX3.263标准
- 10/100M Bast-T
- 工作温度： 0 ~70℃
- 存储温度： -25 ~85℃
- SMD 表贴安装
- 回流焊温度： 峰值温度≤250℃ (10s)
- 回流焊次数： 建议不大于 3 次
- 尺寸： 28.58*12.19*6.6mm



2 参数表

产品型号	OCL(uH min) @100KHz/0.1Vms 8MA	Turns Ratio(3%)		DCR (Ω) Max 9-10,11-12 13-14,15-16	Cww(Pri:Sec) pF Typ		Isolation Voltage(AC Vrms 3S)
H84001S	350UH	1:1		0.9/1.2	35		1500V
产品型号	InsertionLoss(dB Max .@4MHz)	Return Loss(dB Min @4MHz			DMRR(dB min)MHz		Crosstalkm (dB
		1-30	40~60	60~100	1-60	60~100	1~100
H84001S	-1.2	-18	-16	-14	-40	-30	-35


3 外观尺寸图

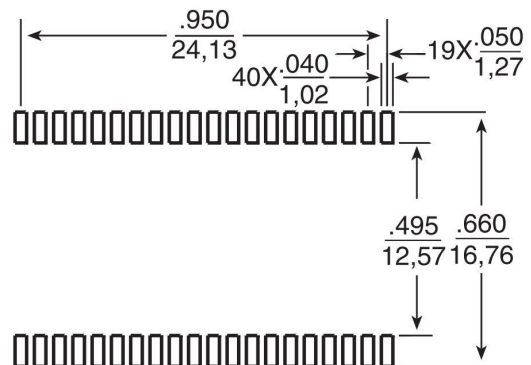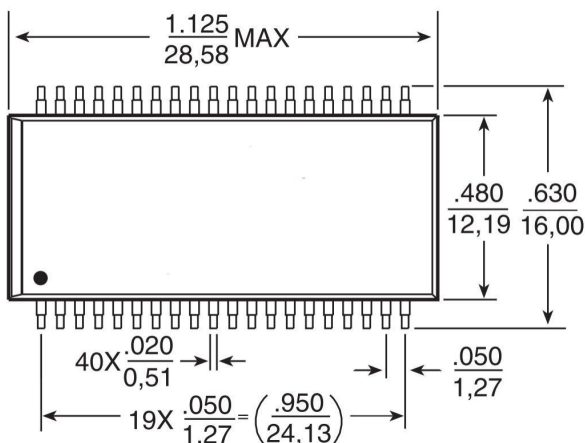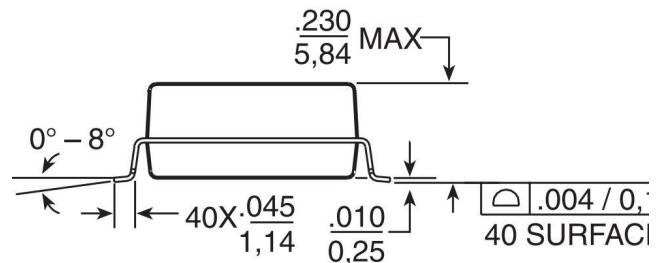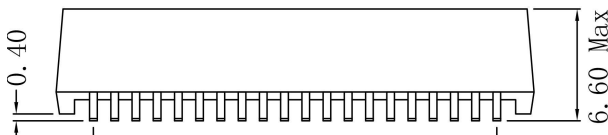





SUGGESTED PAD LAYOUT

※单位： mm

4 原理图

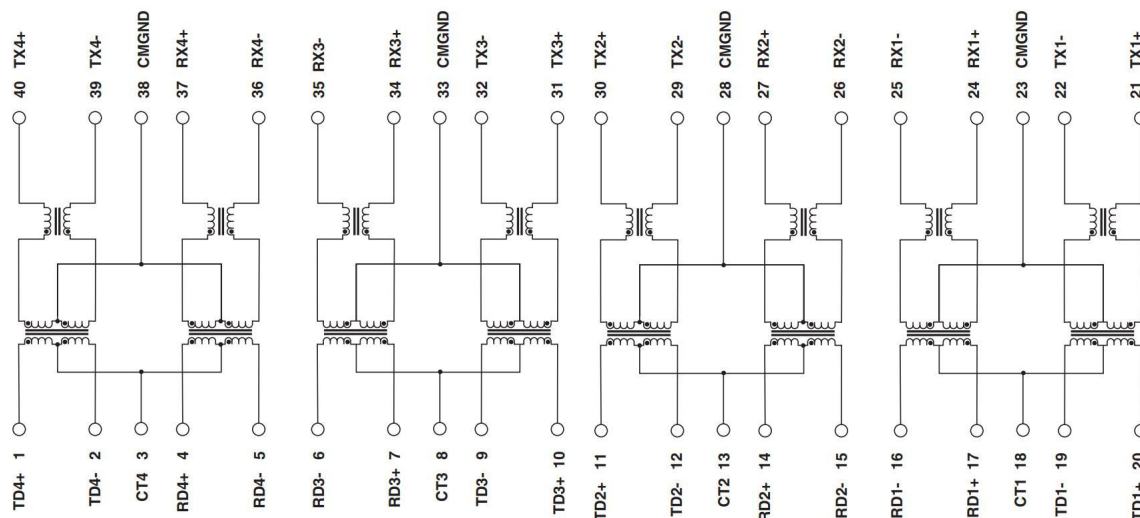

5 包装信息

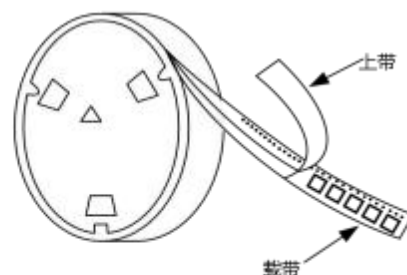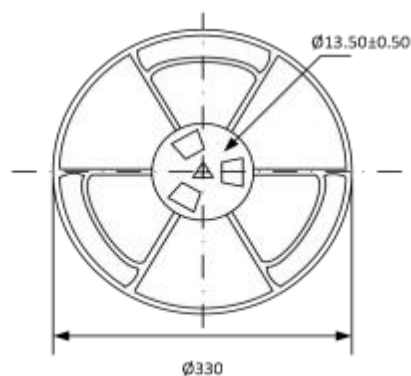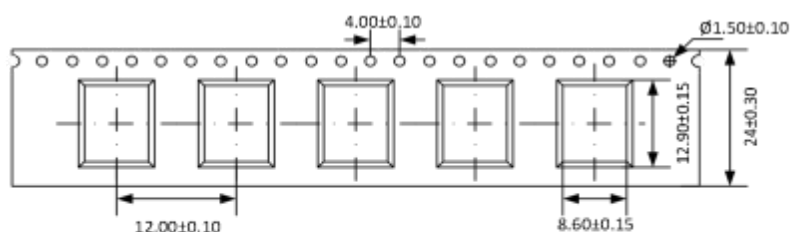

※单位: mm

※包装数量(MOQ): 400pcs/卷 2000pcs/箱

※外箱尺寸: ***