

1 Features


- Meets IEEE 802.3 and ANSI X3.263 standards .RoHS Compliant
- 10/100 Base-T, Surface Mount Type, Open Header
- Cable interface for isolation and low common mode emissions.
- Reflow soldering temperature: peak temperature $\leq 250^{\circ}\text{C}$ (10s)
- Reflow soldering frequency: It is recommended not to exceed 3 times
- Storage temperature range: -55°C to $+125^{\circ}\text{C}$
- Operating temperature range: -40°C to $+85^{\circ}\text{C}$



2 Specifications (特性参数)

Part No	OCL(μ H min) @100KHz/0.1Vms	Turns Ratio(3%)	Leakage primary@10KHz 0.1Vms	DCR (Ω) Max	Cww(Pri:Sec) pF Typ		Isolation Voltage(AC Vrms 1S)
HX81621S	350UH	1:1	0.5uH max	0.9/1.2	35		1500V
Part No	InsertionLoss(dB Max .@4MHz)	Return Loss(dB Min @4MHz)			CMRR(dB min)MHz		Crosstalk (dB min)MHz
		1-30	40~60	60~100	1-60	60~100	1~100
HX81621S	-1.2	-18	-16	-12	-40	-30	-35


3 Mechanical (外观尺寸图)

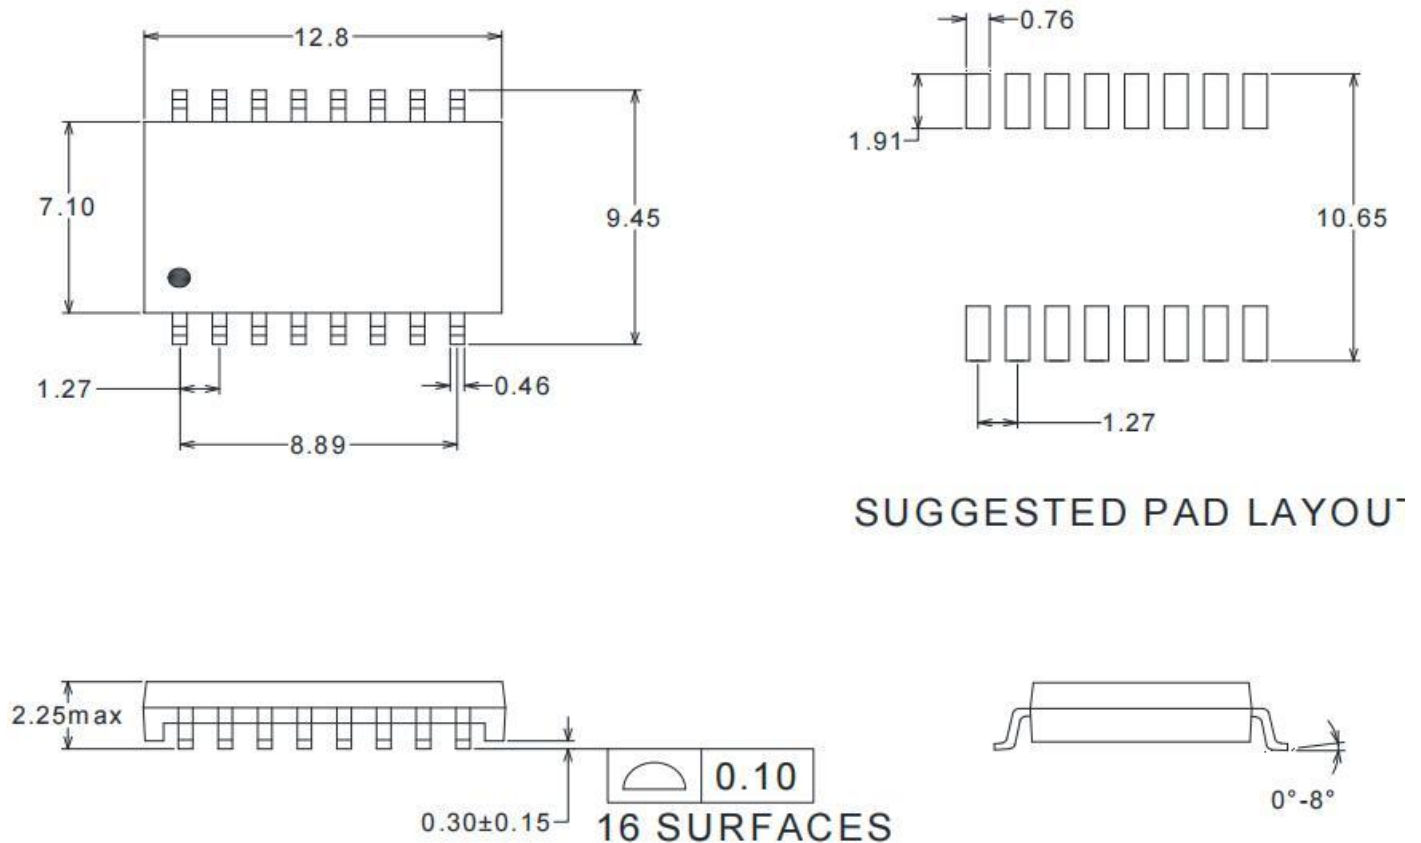


※unit: mm

Unless otherwise specified all tolerances are: ± 0.15

4 Schematic (原理图)

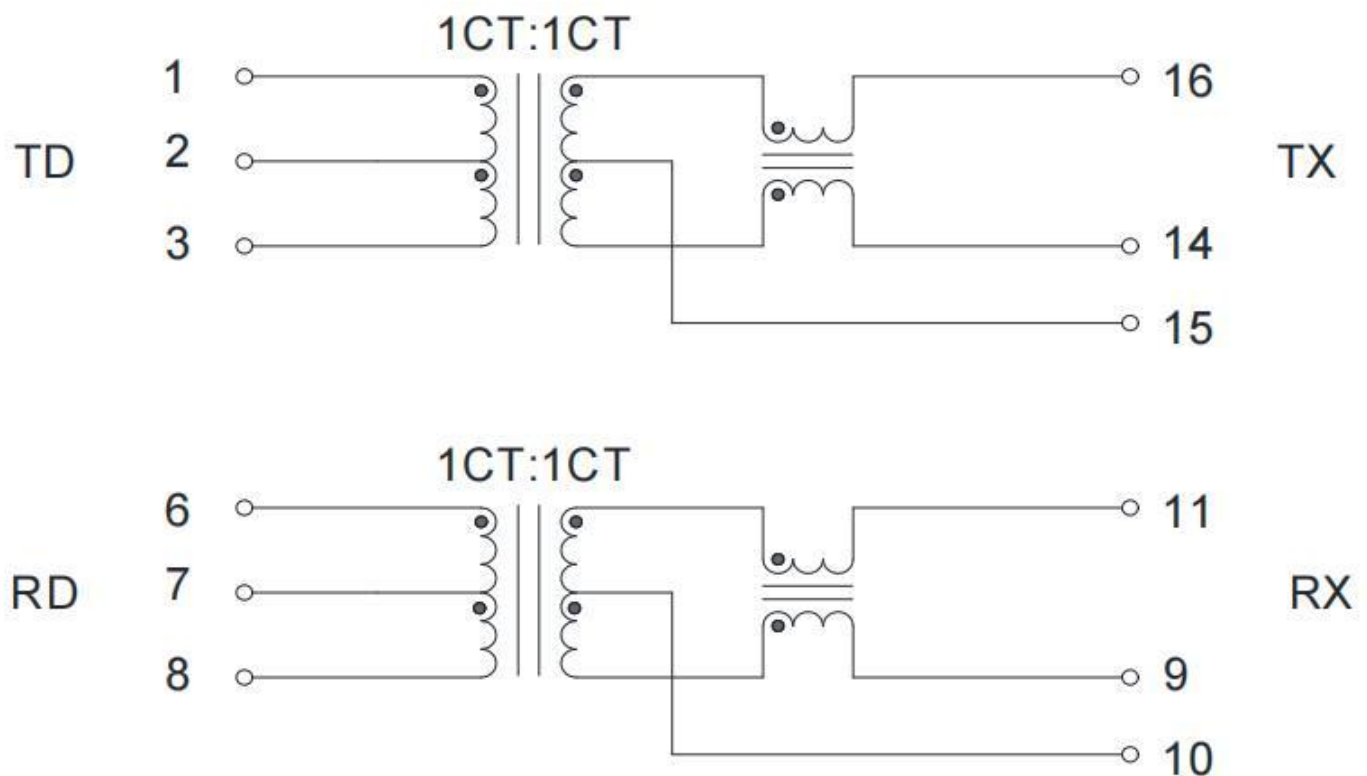

5 packing (包装信息)

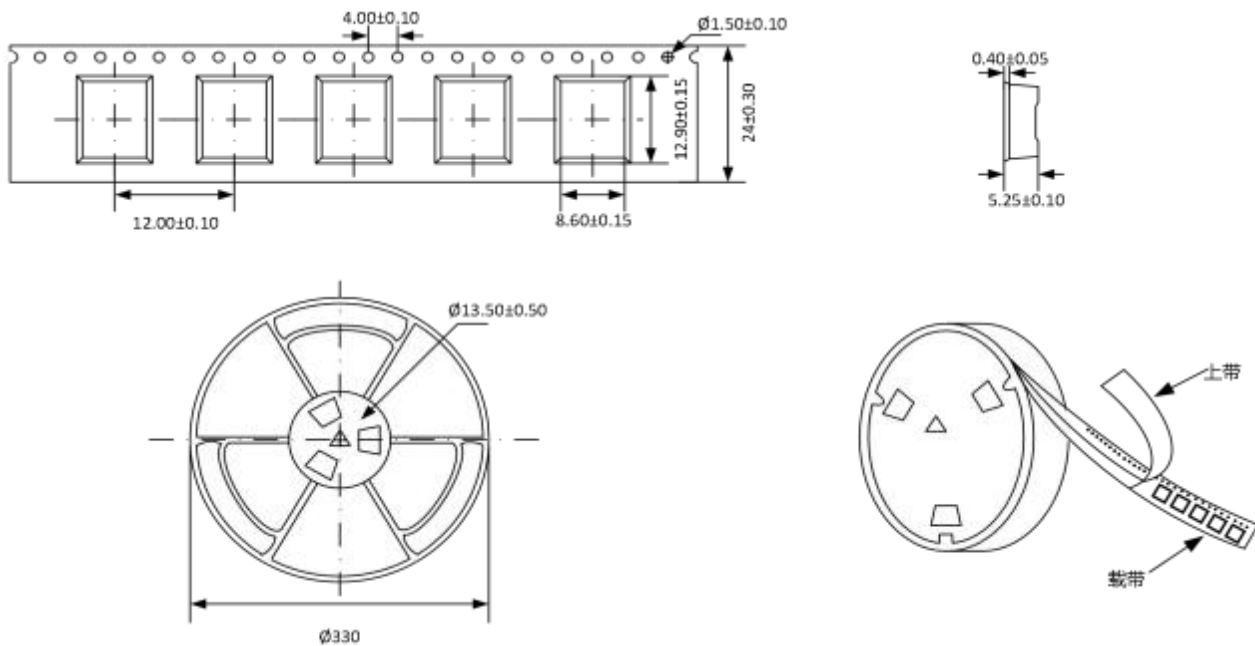

※unit: mm

※ Packaging quantity : *2000pcs/roll *16000 pcs/box

※ Outer box size: * L * * W * * H