


FEATURES

- Maximum output current
 $I_{OM}: 0.1A$
- Output voltage
 $V_O: 5V$
- Continuous total dissipation
 $P_D: 0.6 W (T_a = 25^\circ C)$

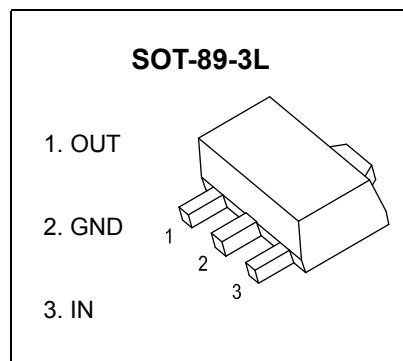

ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)


Parameter	Symbol	Value	Unit
Input Voltage	V_i	30	V
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	160	$^\circ C/W$
Operating Junction Temperature Range	T_{OPR}	-40~+125	$^\circ C$
Storage Temperature Range	T_{STG}	-65~+150	$^\circ C$

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ($V_i=10V, I_o=40mA, C_i=0.33\mu F, C_o=0.1\mu F$, unless otherwise specified)

Parameter	Symbol	Test conditions		Min	Typ	Max	Unit
Output voltage	Vo		25°C	4.80	5.0	5.20	V
				4.85	5.0	5.15	V
				4.90	5.0	5.10	V
		7V≤Vi≤20V, Io=1mA~40mA	0-125°C	4.75	5.0	5.25	V
		Io=1mA~70mA		4.75	5.0	5.25	V
Load Regulation	ΔVo	Io=1mA~100mA	25°C		15	60	mV
		Io=1mA~40mA	25°C		8	30	mV
Line regulation	ΔVo	7V≤Vi≤20V	0-125°C		32	150	mV
		8V≤Vi≤20V	25°C		26	100	mV
Quiescent Current	Iq		25°C		3.8	6	mA
Quiescent Current Change	ΔIq	8V≤Vi≤20V	0-125°C			1.5	mA
	ΔIq	1mA≤Vi≤40mA	0-125°C			0.1	
Output Noise Voltage	VN	10Hz≤f≤100KHz	25°C		42		μV/Vo
Ripple Rejection	RR	8V≤Vi≤20V,f=120Hz	0-125	41	49		dB
Dropout Voltage	Vd		25°C		1.7		V

* Pulse test.


TYPICAL APPLICATION

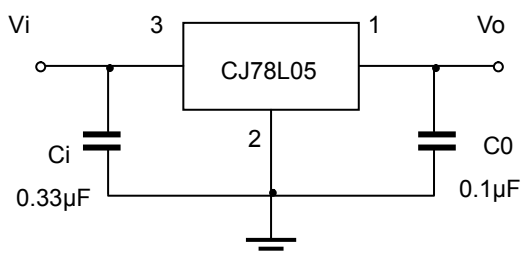


Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

Typical Characteristics


Output Characteristics

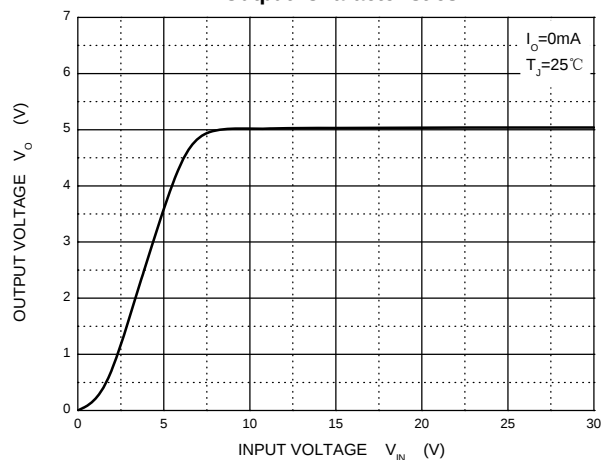


Dropout Characteristics

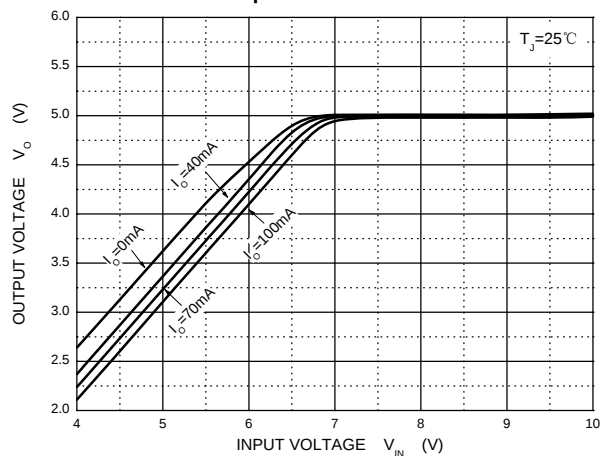


Quiescent Current vs Input Voltage

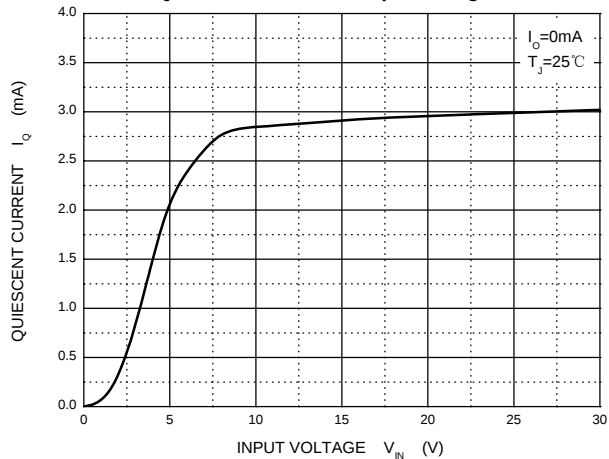


Current Cut-off Grid Voltage

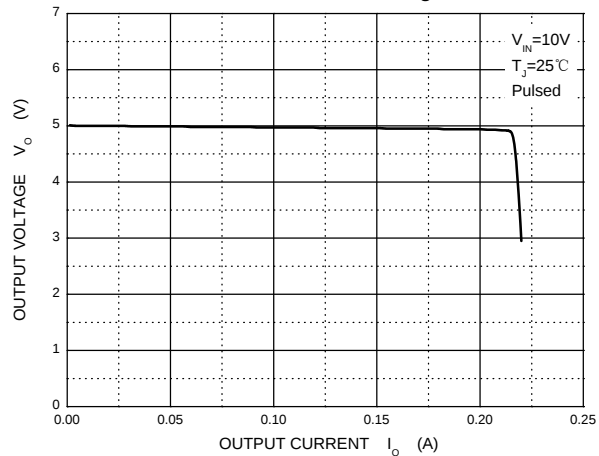


Output Voltage vs Junction Temperature

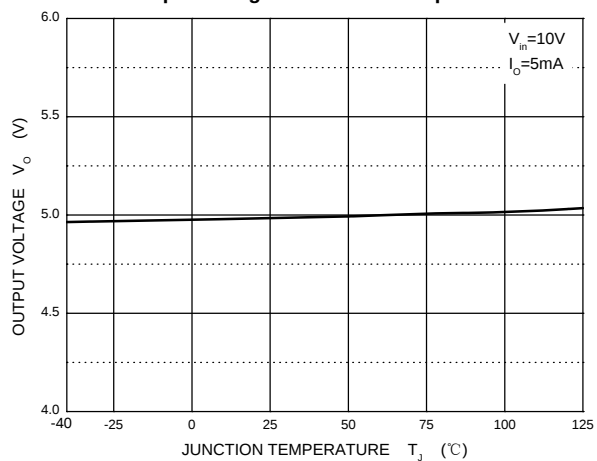

Power Derating Curve

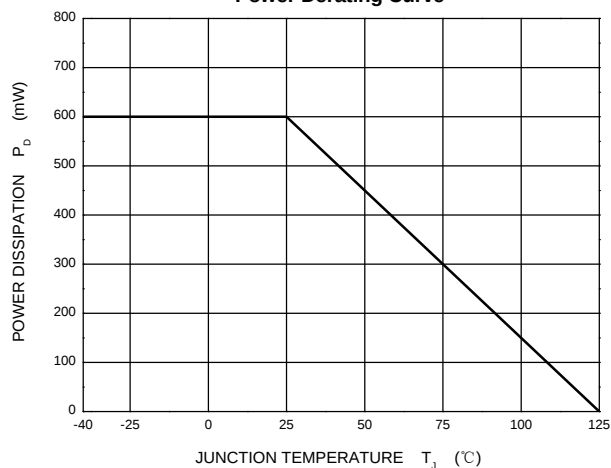


SOT-89-3L Package Outline Dimensions

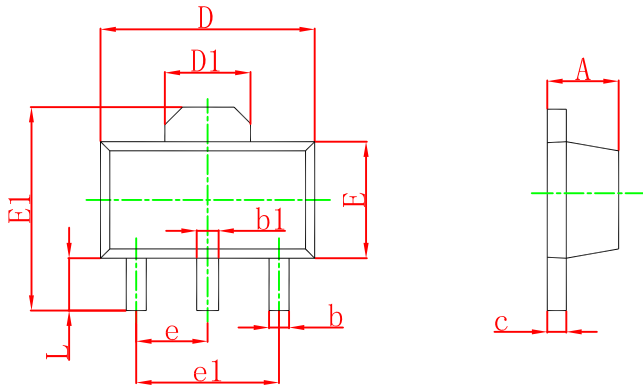

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.400	0.580	0.016	0.023
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.550 REF.		0.061 REF.	
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500 TYP.		0.060 TYP.	
e1	3.000 TYP.		0.118 TYP.	
L	0.900	1.200	0.035	0.047

SOT-89-3L Suggested Pad Layout

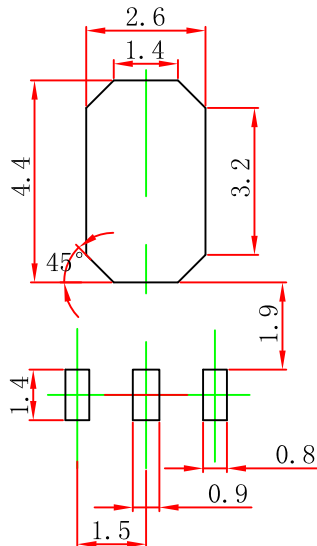

Note:

1. Controlling dimension: in millimeters.
2. General tolerance: ± 0.05 mm.
3. The pad layout is for reference purposes only.