

SURFACE MOUNT TRANSIENT VOLTAGE SUPPRESSOR

Features

- ◆ For surface mounted applications in order to optimize board
- ◆ space Low profile package
- ◆ Built-in strain relief
- ◆ Glass passivated junction
- ◆ Low inductance
- ◆ Excellent clamping capability
- ◆ 600W peak pulse power capability at 10/1000μs waveform,
- ◆ repetition rate (duty cycle): 0.01%
- ◆ Fast response time
- ◆ Typical IR less than 1μA above 12V
- ◆ High Temperature soldering: 260°C / 40 seconds at terminals
- ◆ Plastic package has underwriters laboratory flammability 94V-0

Mechanical Data

Case : JEDEC DO-214AA/SMB molded plastic body

Terminals : Solderable per MIL-STD-750, Method 2026


Polarity : Polarity symbol marking on body

Mounting Position : Any

Weight : 0.003 ounce, 0.095 grams

DO-214AA/SMB

ROHS
COMPLIANT

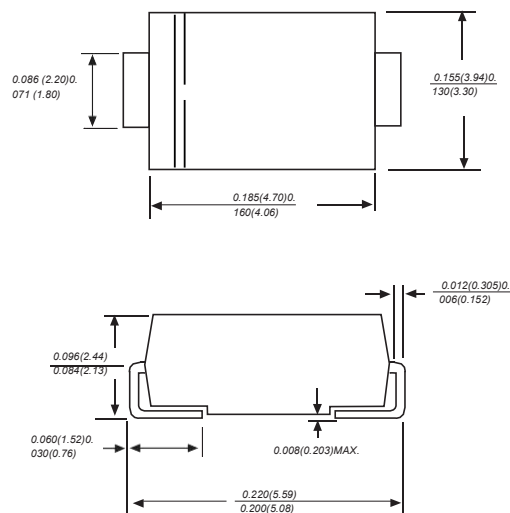

Dimensions in inches and (millimeters)

Applications

- ◆ I/O interface
- ◆ AC/DC power supply
- ◆ Industrial and Consumer electronic applications.

MAXIMUM RATINGS AND CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Peak Pulse Power Dissipation at $T_A=25^\circ\text{C}$ by 10x1000μs waveform (Fig.1) (Note 1), (Note 2)	P_{PPM}	600	Watts
Power Dissipation on infinite heat sink at $T_A=50^\circ\text{C}$	$P_{M(AV)}$	5.0	Watts
Peak Forward Surge Current, 8.3ms Single Half Sine Wave (Note 3)	I_{FSM}	100	Amps
Maximum Instantaneous Forward Voltage at 50A for Unidirectional only (Note 4)	V_F	3.5V/5.0	V
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-65 to +150	°C
Typical Thermal Resistance Junction to Lead	$R_{\theta JL}$	20	°C/W
Typical Thermal Resistance Junction to Ambient	$R_{\theta JA}$	100	°C/W

Notes:

1. Non-repetitive current pulse, per Fig. 3 and derated above $T_A = 25^\circ\text{C}$ per Fig. 2.
2. Mounted on copper pad area of .2x0.2" (5.0 x 5.0mm) each terminal.
3. Measured on 8.3ms single half sine wave or equivalent square wave for unidirectional device only, duty cycle=4 per minute.
4. $V_F \leq 3.5\text{V}$ for $V_{BR} < 200\text{V}$ and $V_F < 5.0\text{V}$ for $V_{BR} \geq 201\text{V}$.

Electrical Characteristics (TA=25°C)

Part Number (Uni)	Part Number (Bi)	Marking		Reverse Stand off Voltage V_R (Volts)	Breakdown Voltage V_{BR} (Volts) @ I_T		Test Current I_T (mA)	Maximum Clamping Voltage V_C @ I_{PP} (V)	Maximum Peak Power Dissipation P_{Ise} Current I_{PP} (A)	Maximum Reverse Leakage Current I_R @ V_R (μA)	Agency Approval 
		UNI	BI		MIN	MAX					
P6SMB6.8A	P6SMB6.8CA	6V8A	6V8C	5.80 6.	6.45	7.14	101	10.5	58.1	1000	X
P6SMB7.5A	P6SMB7.5CA	7V5A	7V5C	40 7.	7.13 7	7.88 8.	010	11.3	54.0	500	X
P6SMB8.2A	P6SMB8.2CA	8V2A	8V2C	02 7.	.79 8.	619.55	1	12.1	50.4	200	X
P6SMB9.1A	P6SMB9.1CA	9V1A	9V1C	78 8.	65 9.	10.50	1	13.4	45.5	50	X
P6SMB10A	P6SMB10CA	10A	10C	55 9.	50 10.	11.60	1	14.5	42.1	10	X
P6SMB11A	P6SMB11CA	11A	11C	40 10.	50 11.	12.60	1	15.6	39.1	5	X
P6SMB12A	P6SMB12CA	12A	12C	20 11.	40 12.	13.70	1	16.7	36.5	5	X
P6SMB13A	P6SMB13CA	13A	13C	10 12.	40 14.	15.80	1	18.2	33.5	1	X
P6SMB15A	P6SMB15CA	15A	15C	80 13.	30	16.80	1	21.2	28.8	1	X
P6SMB16A	P6SMB16CA	16A	16C	60	15.20	18.90	1	22.5	27.1	1	X
P6SMB18A	P6SMB18CA	18A	18C	15.30	17.10	21.00	1	25.5	24.2	1	X
P6SMB20A	P6SMB20CA	20A	20C	17.10	19.00	23.10	1	27.7	22.0	1	X
P6SMB22A	P6SMB22CA	22A	22C	18.80	20.90	25.20	1	30.6	19.9	1	X
P6SMB24A	P6SMB24CA	24A	24C	20.50	22.80	28.40	1	33.2	18.4	1	X
P6SMB27A	P6SMB27CA	27A	27C	23.10	25.70	31.50	1	37.5	16.3	1	X
P6SMB30A	P6SMB30CA	30A	30C	25.60	28.50	34.70	1	41.4	14.7	1	X
P6SMB33A	P6SMB33CA	33A	33C	28.20	31.40	37.80	1	45.7	13.3	1	X
P6SMB36A	P6SMB36CA	36A	36C	30.80	34.20	41.00	1	49.9	12.2	1	X
P6SMB39A	P6SMB39CA	39A	39C	33.30	37.10	45.20	1	53.9	11.3	1	X
P6SMB43A	P6SMB43CA	43A	43C	36.80	40.90	49.40	1	59.3	10.39	1	X
P6SMB47A	P6SMB47CA	47A	47C	40.20	44.70	53.60	1	64.8	.48.7	1	X
P6SMB51A	P6SMB51CA	51A	51C	43.60	48.50	58.80	1	70.1	7.97.	1	X
P6SMB56A	P6SMB56CA	56A	56C	47.80	53.20	65.10	1	77.0	26.6	1	XX
P6SMB62A	P6SMB62CA	62A	62C	53.00	58.90	71.40	1	85.0	5.95.	1	X
P6SMB68A	P6SMB68CA	68A	68C	58.10	64.60	78.80	1	92.0	44.9	1	XX
P6SMB75A	P6SMB75CA	75A	75C	64.10	71.30	86.10	1	103.0	4.54.	1	X
P6SMB82A	P6SMB82CA	82A	82C	70.10	77.90	95.50	1	113.0	03.7	1	XX
P6SMB91A	P6SMB91CA	91A	91C	77.80	86.50	105.00	1	125.0	3.42.	1	X
P6SMB100A	P6SMB100CA	100A	100C	85.50	95.00	116.00	1	137.0	92.8	1	XX
P6SMB110A	P6SMB110CA	110A	110C	94.00	105.00	126.00	1	152.0	2.62.	1	X
P6SMB120A	P6SMB120CA	120A	120C	102.00	114.00	137.00	1	165.0	5	1	XX
P6SMB130A	P6SMB130CA	130A	130C	111.00	124.00	158.00	1	179.0		1	X
P6SMB150A	P6SMB150CA	150A	150C	128.00	143.00	168.00	1	207.0		1	XX
P6SMB160A	P6SMB160CA	160A	160C	136.00	152.00	179.00	1	219.0		1	X
P6SMB170A	P6SMB170CA	170A	170C	145.00	162.00	189.00	1	234.0		1	X
P6SMB180A	P6SMB180CA	180A	180C	154.00	171.00	210.00	1	246.0		1	X
P6SMB200A	P6SMB200CA	200A	200C	171.00	190.00	231.00	1	274.0	2.2	1	X
P6SMB220A	P6SMB220CA	220A	220C	185.00	209.00	263.00	1	328.0	1.91	1	
P6SMB250A	P6SMB250CA	250A	250C	214.00	237.00	315.00	1	344.0	.81.	1	
P6SMB300A	P6SMB300CA	300A	300C	256.00	285.00	368.00	1	414.0	51.3	1	
P6SMB350A	P6SMB350CA	350A	350C	300.00	332.00	420.00	1	482.0	1.11	1	
P6SMB400A	P6SMB400CA	400A	400C	342.00	380.00	462.00	1	548.0	.00.	1	
P6SMB440A	P6SMB440CA	440A	440C	376.00	418.00	504.00	1	602.0	90.9	1	
P6SMB480A	P6SMB480CA	480A	480C	408.00	456.00	535.00	1	658.0	0.80	1	
P6SMB510A	P6SMB510CA	510A	510C	434.00	485.00	556.50	1	698.0	.8	1	
P6SMB530A	P6SMB530CA	530A	530C	477.00	503.50	567.00	1	725.0		1	
P6SMB540A	P6SMB540CA	540A	540C	486.00	513.00	577.50	1	740.0		1	
P6SMB550A	P6SMB550CA	550A	550C	495.00	522.50			760.0	0.8	1	

For bidirectional type having V_R of 10 volts and less, the I_R limit is double.

The available parts are "A" type only, the parts without A (V_{BR} is $\pm 10\%$) is not available.

Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Figure 1 - Peak Pulse Power Rating

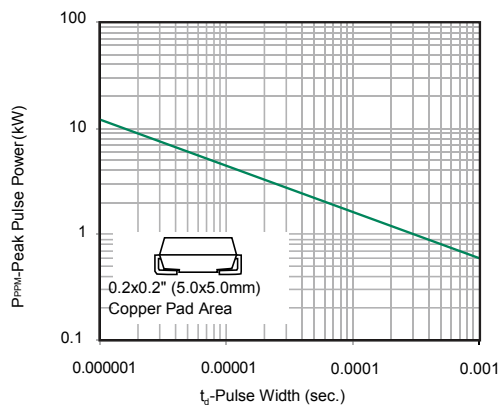


Figure 2 - Pulse Derating Curve

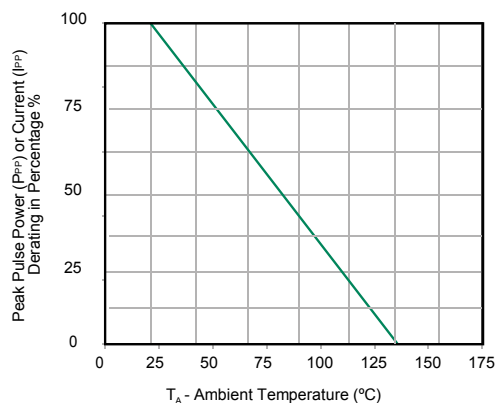


Figure 3 - Pulse Waveform

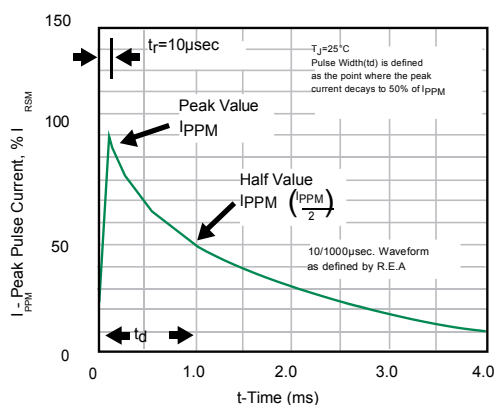


Figure 4 - Typical Junction Capacitance

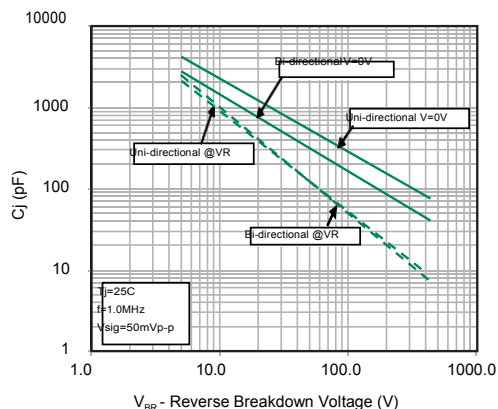


Figure 5 - Steady State Power Dissipation Derating Curve



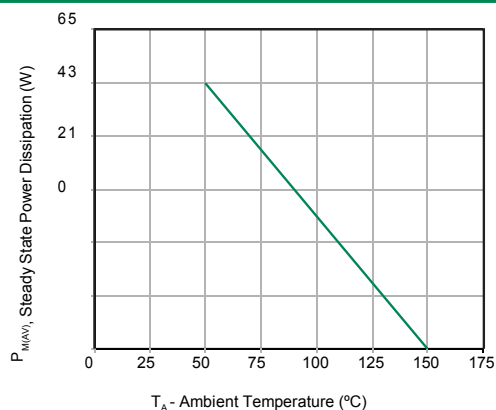


Figure 6 - Maximum Non-Repetitive Peak Forward Surge Current Uni-Directional Only

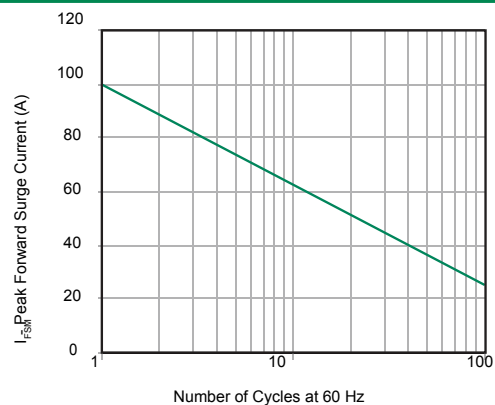

Soldering Parameters

Reflow Condition		-FBEoGSFF BTTFNCMZ
Pre Heat	- Temperature Min ($T_{s(min)}$)	150°C
	- Temperature Max ($T_{s(max)}$)	200°C
	- Time (min to max) (t_s)	60 o 180 TFDT
Average ramp up rate (Liquidus Temp (T_L) to peak		3°C/second max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/second max
Reflow	- Temperature (T_L) (Liquidus)	217°C
	- Time (min to max) (t_s)	60 o 150 TFDPOET
Peak Temperature (T_p)		260 ^{+0/-5} °C
Time within 5°C of actual peak Temperature (t_p)		20 o 40 TFDPOET
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_p)		8 minutes Max.
Do not exceed		280°C

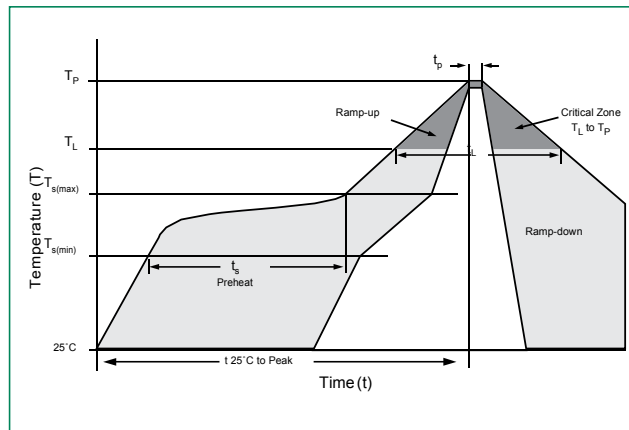


Physical Specifications

Weight	0.003 ounce, 0.093 grams
Case	JEDEC DO214AA. Molded plastic body over glass passivated junction
Polarity	Color band denotes cathode except Bidirectional.
Terminal	Matte Tin-plated leads, Solderable per JESD22-B102D

Environmental Specifications

Temperature Cycle	JESD22-A104
Pressure Cooker	JESD 22-A102
High Temp. Storage	JESD22-A103
HTRB	JESD22-A108
Thermal Shock	JESD22-A106

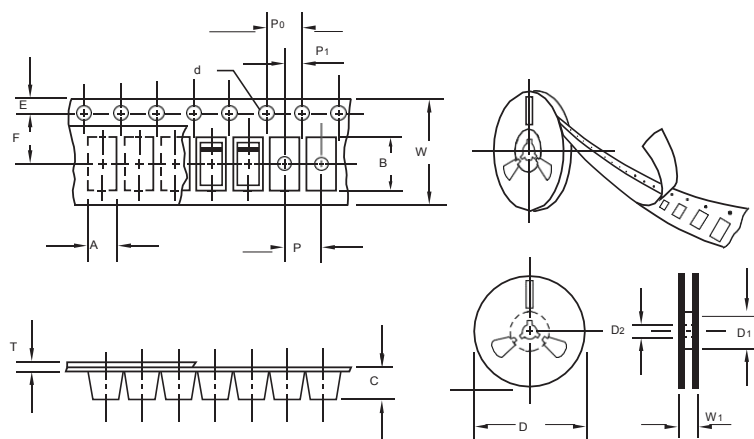

unit:mm


Item	Symbol	Tolerance	SMB
Carrier width	A	0.1	3.81
Carrier length	B	0.1	5.41
Carrier depth	C	0.1	2.42
Sprocket hole	d	0.05	1 5.0
13" Reel outside diameter	D	2.0	330.00
13" Reel inner diameter	D ₁	min	50.00
Feed hole diameter	D ₂	0.5	13.00
Sprocket hole position	E	0.1	1.75
Punch hole position	F	0.1	5.55
Punch hole pitch	P	0.1	8.00
Sprocket hole pitch	P ₀	0.1	4.00
Embossment center	P ₁	0.1	2.00
Overall tape thickness	T	0.1	0.30
Tape width	W	0.3	12.00
Reel width	W ₁	1.0	12.30

Note: Devices are packed in accordance with EIA standard RS-481-A and specifications listed above.

Reel packing

PACKAGE	REEL SIZE	REEL (pcs)	COMPONENT SPACING (mm)	BOX (pcs)	INNER BOX (mm)	REEL DIA, (mm)	CARTON SIZE (mm)	CARTON (pcs)	APPROX. GROSS WEIGHT (kg)
SMB	13"	3,000	4.0	6,000	190*190*41	330	365*365*360	48,000	14.0

Suggested Pad Layout

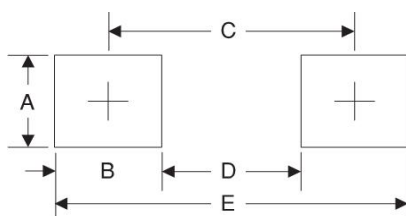

Symbol	Unit (mm)	Unit (inch)
AB	2.82	0.1100
C	.44	.0940
DE	62.2	1810
	7.0	0860
		276